



US 20100132391A1


(19) **United States**(12) **Patent Application Publication****Barot**(10) **Pub. No.: US 2010/0132391 A1**(43) **Pub. Date: Jun. 3, 2010**(54) **MOTOR CYCLE AIR CONDITIONING SYSTEM****Related U.S. Application Data**



(60) Provisional application No. 60/914,931, filed on Apr. 30, 2007.

(75) Inventor: **Ravitkant T. Barot**, Chesterbrook, PA (US)**Publication Classification**(51) **Int. Cl.**  
**B60H 1/00** (2006.01)  
**F28D 15/00** (2006.01)(52) **U.S. CL.** ..... **62/244; 165/104.19**(57) **ABSTRACT**

A Motor Cycle personal cooling system is disclosed that utilizes waste heat employing solid adsorption. The system includes an air distribution module and one or more desiccant chambers encircling the exhaust pipes of the Motor Cycle. Air blowers blow ambient air across the heat exchanger, cooling the air, transferring heat to the heat exchanger, transferring heat to the water, causing it to boil, and turning the water into vapor which is then adsorbed by the desiccant. A heat source is then applied to the desiccant which releases the vapor that travels to one of the heat exchangers and condenses the vapor back into water. A cooling garment worn by rider of the Motor Cycle has a cool air input and an exhaust output. The cool air input of the cooling garment receives cooled air from the air blowers, and body heat exits out the exhaust output.

Correspondence Address:

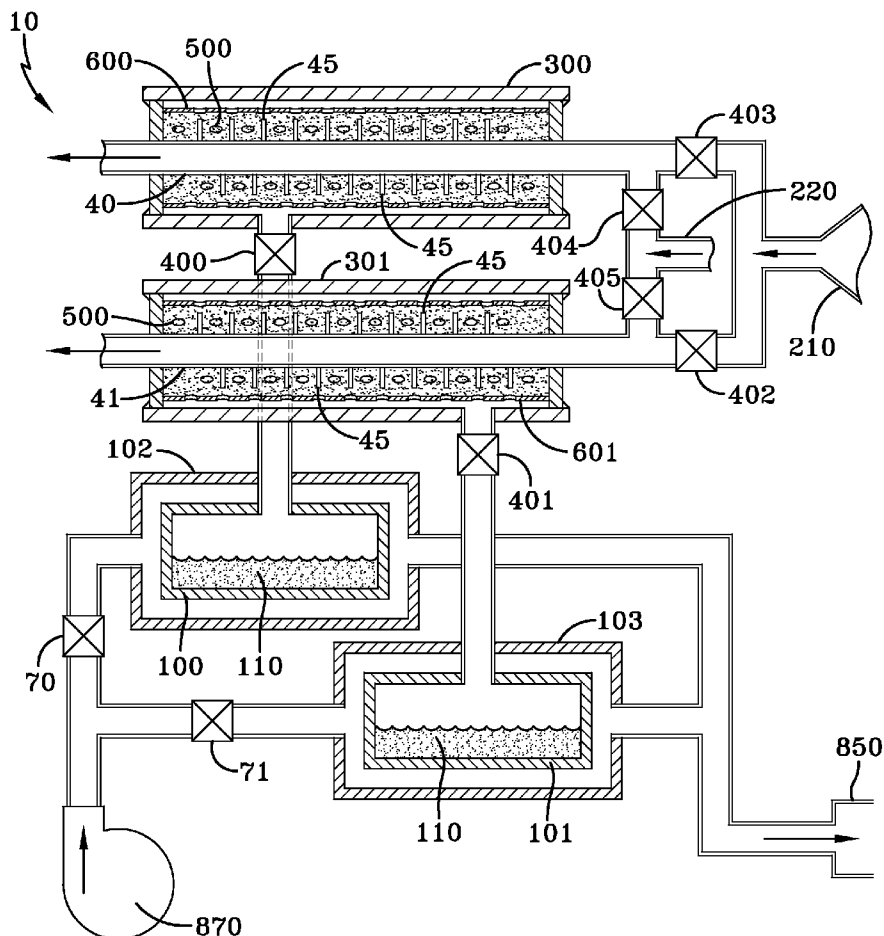**WOODCOCK WASHBURN LLP****CIRA CENTRE, 12TH FLOOR, 2929 ARCH STREET****PHILADELPHIA, PA 19104-2891 (US)**(73) Assignee: **OXICOOL, INC.**,  
PHILADELPHIA, PA (US)(21) Appl. No.: **12/598,156**(22) PCT Filed: **Apr. 30, 2008**(86) PCT No.: **PCT/US08/62118**§ 371 (c)(1),  
(2), (4) Date:**Oct. 29, 2009**

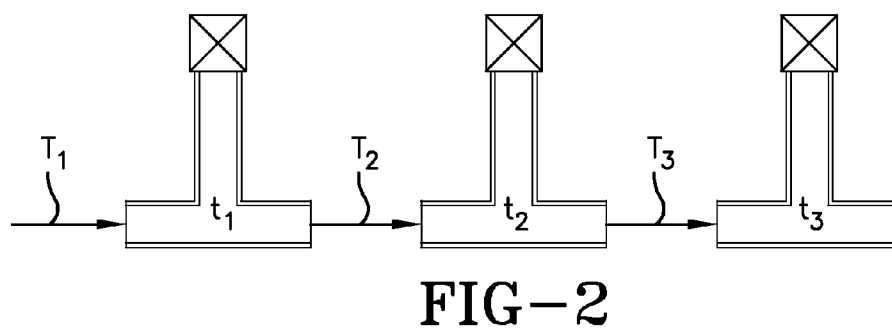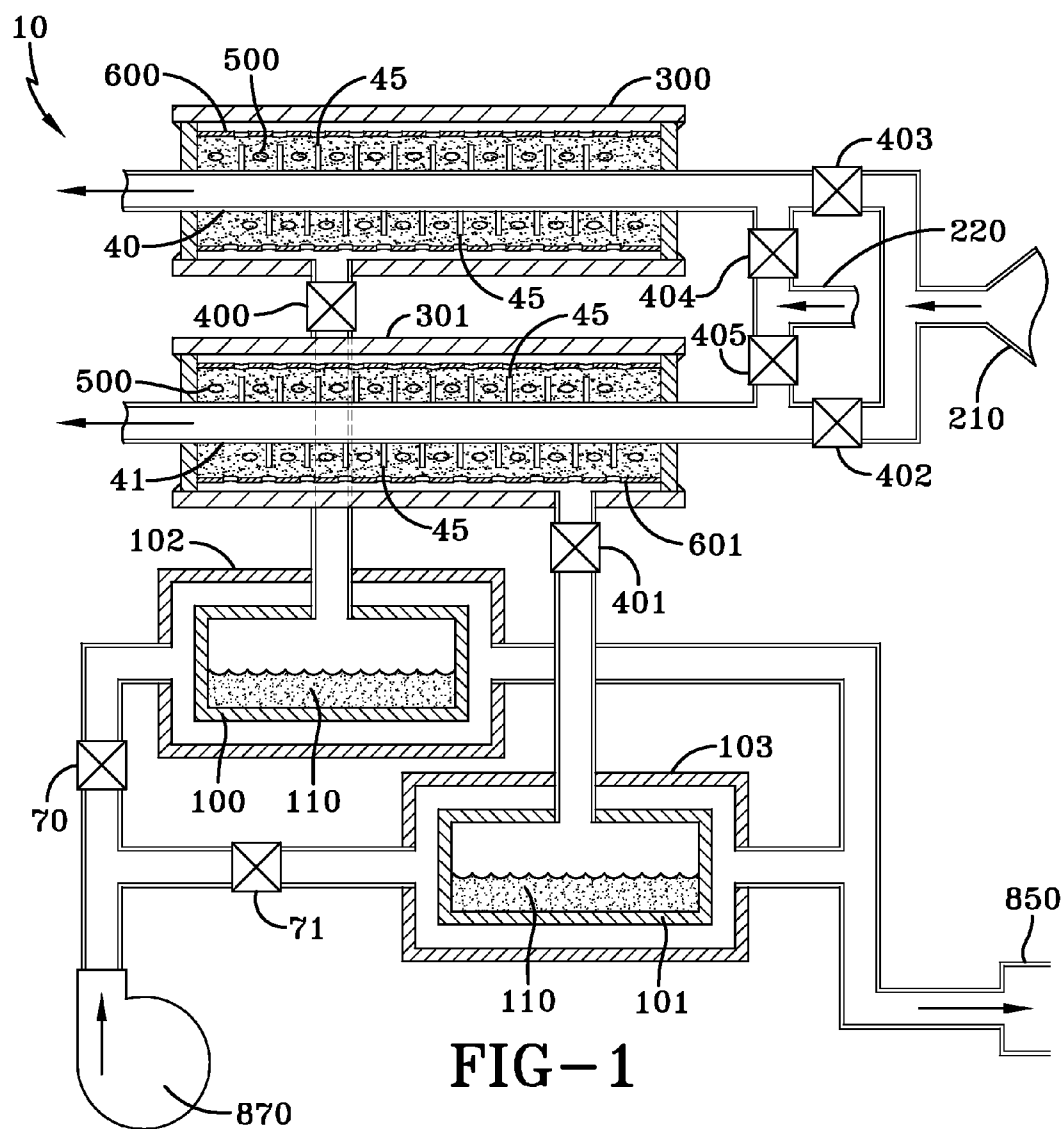

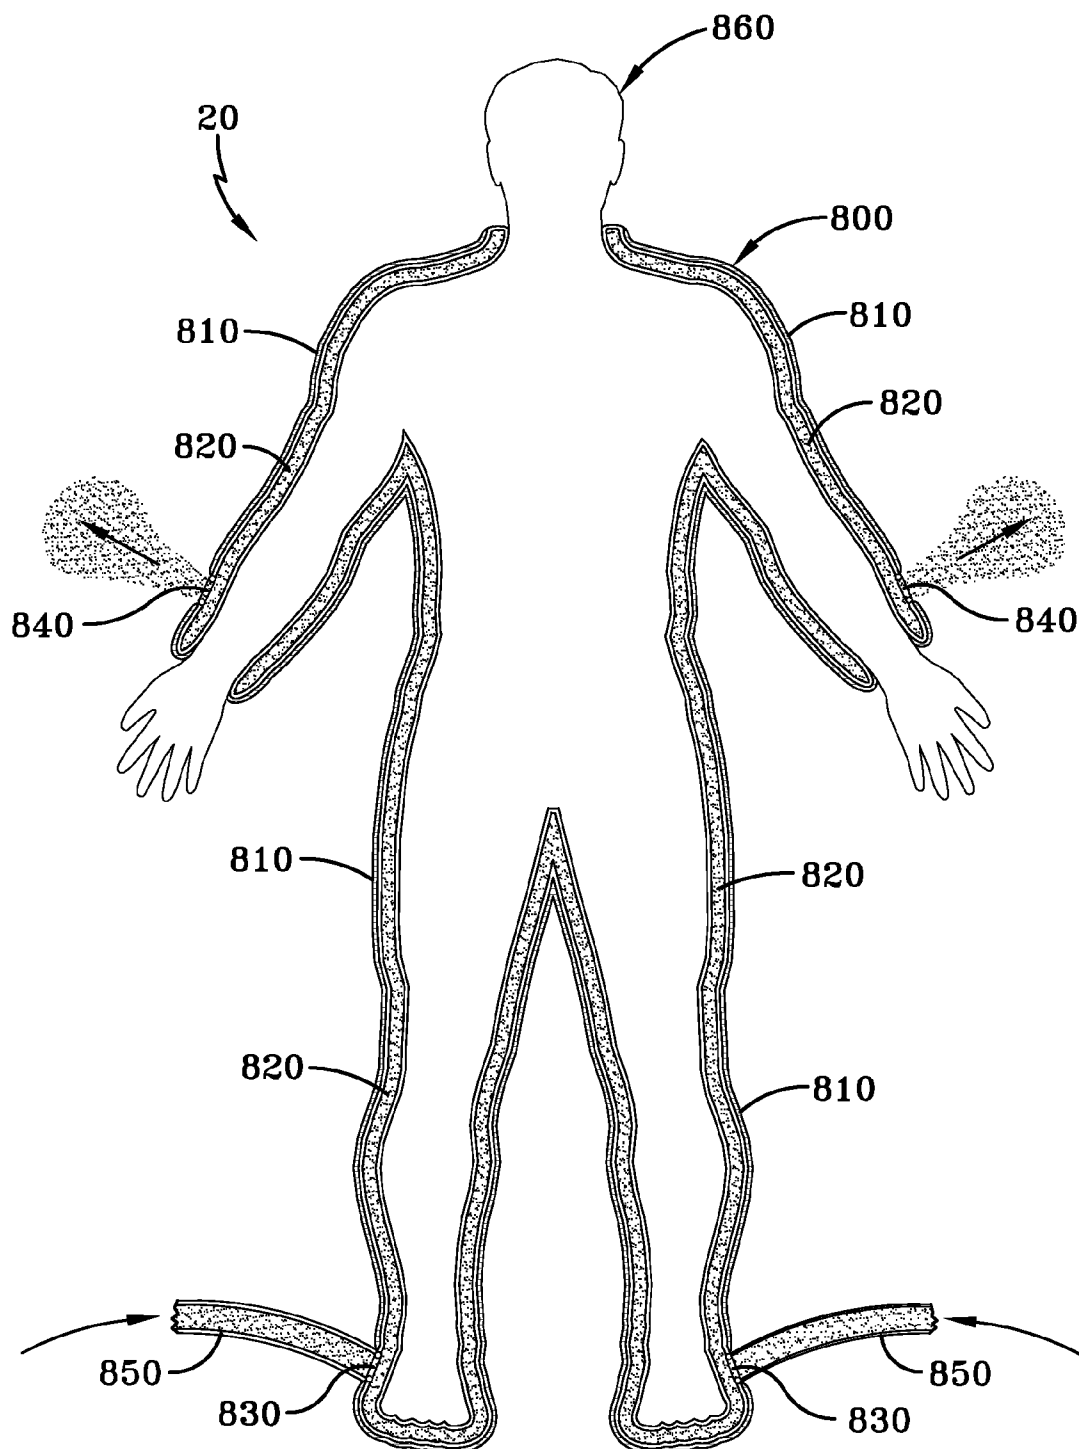


FIG-3

## MOTOR CYCLE AIR CONDITIONING SYSTEM

### FIELD OF THE INVENTION

**[0001]** The present invention relates to personal cooling systems for riders of two/three wheeler (hereinafter called Motor Cycle) vehicles, in particular, the use of waste exhaust heat employing solid adsorption to cool persons riding those vehicles.

### BACKGROUND OF THE INVENTION

**[0002]** The military personnel, athletes, and racecar drivers have all designed and used personal cooling systems. Commercial personal cooling systems use various technologies such as (1) frozen gel paks (2) paraffin phase change, (3) evaporative, (4) air circulated by fan, (5) thermo-electric, and (6) circulating water using either ice or vapor compression. Each technology has its limitation in a Motor Cycle personal cooling system. No personal cooling system has been made commercially available using solid adsorption, desiccant technology. Also, no personal cooling system has utilized waste heat for an energy source in the personal cooling system.

**[0003]** The use of desiccants in refrigeration systems is well known in the prior art. For example, U.S. Pat. No. 6,557,365, describes a desiccant refrigerant and dehumidifier that uses material is used to absorb moisture from the ambient hot and humid air.

**[0004]** Additionally, apparatuses for cooling a motorcyclist are well known. For example, U.S. Pat. No. 4,722,099 describes a protective motorcycle garments for maximum cooling which allows ambient air to flow through the garments. The air which flows through the garment is not cooled, so that the cooling effect is very limited, and depends on the ambient air temperature. CAN. patent application No. 2,171,265 describes a motorcycle helmet having a thermoelectric device. The thermoelectric device cools only the inner space of the helmet, has relative low cooling power, and being located near the motorcyclist head can cause the motorcyclist severe head damage as a result of an accident. The thermoelectric device is relatively heavy, it can electrify the motorcyclist and the motorcyclist wearing the thermoelectric device has to exert an effort to continuously balance helmet.

**[0005]** There is one patent on a Motor Cycle air conditioning system that uses thermoelectric modules for cooling, U.S. Pat. No. 6,510,696. The '696 patent describes a thermoelectric air-condition apparatus with controllable air flows, however, its thermoelectric, modules are powered by electricity and thus they also cause a significant draw of current from the existing electrical system.

**[0006]** Accordingly, there is a need for an Motor Cycle personal cooling system that can be mounted on a Motor Cycle, that can satisfy various cooling thermal requirements for the Motor Cycle rider and/or passenger, and not cause significant draw of engine power or electric current.

### BRIEF SUMMARY OF THE INVENTION

**[0007]** The present invention utilizes a desiccants in the Motor Cycle personal cooling system **10** (FIG. 1), utilizing the exhaust heat of the motor cycle engine, and does not cause any significant draw of engine power or electric power from the motor cycle engine. The invention provides air condition-

ing via a cool suit **20** (FIG. 3) that could be single or more layers where one/some of the multiple layers, if used, could serve as an insulator/cooler.

**[0008]** The layer serving as insulator and the layer serving as primary cooler could be driven by different cooling sources. For example, the primary cooler layer could be cooled by the solid adsorption method and the insulator layer could be cooled by thermo-electrics. The method of using dual (or multiple) chamber cooling where one or more chamber acts as cooling layer and one or more chamber acts as insulating layer, could be applied to Motor Cycle suits but also to all other cool suit applications including but not limited to Military use cool suits, NASA suits, medical use suits, race car driver suits.

**[0009]** A further object of the invention is to provide cool breathing air to the helmet of the Motor Cycle driver and passenger.

**[0010]** Yet another object of the invention is to provide humidity control to the Motor Cycle driver and passenger.

**[0011]** Still yet another object of the invention is to provide such cooling utilizing nontoxic and environmentally friendly liquids and/or gases.

**[0012]** Another object of the invention is to provide for a modular air-conditioning system that is efficient in its operation while at the same time is modular to provide add-on capabilities for the air-conditioning systems.

**[0013]** A further object of the invention is to provide an air conditioning system to a Motorcycle rider and/or passenger using a refrigerant that is free of CFC (Chlorofluorocarbon, a class of chemical compounds that deplete ozone) and HFC (HydroFluoroCarbon).

**[0014]** Yet another object of the invention is to provide an air conditioning system to a Motorcycle rider and/or passenger that, in one embodiment, could derive energy from previously stored, but not dissipated, recharged cycles.

### BRIEF DESCRIPTION OF THE DRAWINGS

**[0015]** FIG. 1 shows the overall schematic diagram illustrating Motor Cycle Air Conditioning System

**[0016]** FIG. 2 is a cooling unit consisting of multiple heat exchangers connected in parallel by valves and piping.

**[0017]** FIG. 3 is the cool suit, cooled by the system shown in FIG. 1.

### DESCRIPTION OF EMBODIMENTS

**[0018]** One embodiment of the Motor Cycle personal cooling system uses a solid adsorption cooling mechanism **10** in which a liquid or gas fluid that is cooled using a desiccant based heat exchange system is circulated within a cool suit **20** by a driver. In that embodiment, an air-conditioning modular system comprises a heat exchanger and a desiccant chamber maintained under low pressure, and means for transferring water vapor from the heat exchanger to the desiccant chamber. The desiccant chamber contains a water adsorbing desiccant—zeolite in this case. The heat exchanger contains water and housing with heat-exchanging fins. The air-conditioning module utilizes tubes for interconnecting the desiccant chamber and the heat exchanger. The pressures of the desiccant chamber and the heat exchanger are maintained to reduce the boiling point of water therein to be near room temperature.

**[0019]** Referring now specifically to the drawings, FIG. 1 shows desiccant chambers **300** and **301** are connected to heat

exchangers **100** and **101** and water vapor flow through those pipes is controlled by valves **400** and **401**. Chambers **300** and **301** have piping **40** and **41** passing through the center of the chambers. Piping **40** and **41** has fins **45** on the outside and is constructed so that efficient heat transfer can happen from the piping **40** and **41** to the desiccant contained in the chamber **300** and **301**. Chambers **300** and **301** are filled with a desiccant (for example zeolite). Chambers **300** and **301** have a built in perforated chamber separator **600** and **601** that form a space on the outer edges of the chambers **300** and **301**, and perforations **500**, facilitate the free and efficient movement of water vapor. The distribution module comprises of valves **402**, **403**, **404**, **405**, funnel **210**, and exhaust connector **220** and allows either air or hot exhaust from the engine that is channeled either through piping **41** and **40**, depended on whether the cooling system is in a cooling or recharging phase. Blower **200** with valves **70** and **71** force the ambient blower air through heat exchanger housings either **102** or **103** as desired.

**[0020]** This embodiment has two cooling units that alternate from a cooling phase to a re-charging phase. At any given time, one cooling unit is in cooling phase while the other is in recharging phase. An alternate embodiment could have at least one or more cool units. In case of three cool units, the system could have three cycles—(a) cooling—desiccant adsorption, (b) drying—desiccant desorption through heating, and (c) reversion to ambient temperature.

#### The Cooling Phase

**[0021]** In the cooling phase, desiccant chamber **300** and heat exchanger **100** is in cooling phase. Ambient air from funnel **210** is channeled to the piping **40** by keeping valve **403** open and valve **402** closed. The valve **400** is computer controlled and is opened as required to allow required quantity of water vapor to transfer to the desiccant in chamber **300** such that cooling happens in heat exchanger **100** that cools the air that is blown by blower **200** via valve **70** to the heat exchanger housing **102** and then to the cool suit via connection **850**. The heat from the water vapor transfers to the desiccant that is transferred via fins **45** and piping **40** to the flowing ambient air.

#### The Recharging Phase

**[0022]** In recharging phase the cooling unit formed by desiccant chamber **301** and heat exchanger **101** is in recharging phase. In this case, the engine exhaust is channeled to the piping **41** by keeping valve **405** open and valve **404** closed. The heat from the exhaust gases transfers to the desiccant in the chamber **301** via piping **41** and fins **45** which causes the desiccant to release the water vapor which travels to the heat exchanger via valve **401** which is kept open by computer control and the water vapor condenses into water to settle in heat exchanger **101**.

**[0023]** The cool suit **20** in FIG. **3** is made of three separate layers such that two independent channels **810** and **820** are formed. The cool air from the cool unit is connected to the channel **820** via connector **850** and inlet **830** that is then circulated in the suit and released from outlet **840**. The channel **810** could be used as an insulating layer filled by an insulator or we could have a built in thermoelectric module to cool the air contained in the channel **810**. In another embodi-

ment, some of the air from outlet **840** could be re-circulated back into the cool suit via connector **830**.

#### Optional Variants

**[0024]** Condensation around the cooling chamber can be limited by suitably controlling the amount of moisture permitted to enter the cooling chamber that thereby limits the rate of water vapor adsorption and consequent cooling rate. A desiccant wheel could be utilized to control the humidity. This wheel could also be recharged using the waste heat of the Motor Cycle exhaust. A combination of valves can regulate the path of cooled fluid (whether gas or liquid) to channel cooled fluid to preferred part of a garment, thereby preferentially cooling certain portion of the wearer's body in order to improve comfort. Multiple cool units can be put in service to operate in parallel but at different time frequencies. While one or more units are being used in its cooling cycle, another one or more can be recharged. The cooling unit fluid used in the system could be water, or other suitable liquid matched with an appropriate desiccant that has a tendency to adsorb that fluid. The fluid circulated between garment and cooling unit could be water or another liquid or could be a gas such as air. The garment could contain multiple layers in which at least two are cooling layers that operate in conjunction. The bottom layer could use circulated air to achieve evaporative cooling of body moisture. One or more of the layers could be a closed, recycled air system that could be cooled by thermoelectric means, and which could also, act as an insulator. A cooling unit could typically be made largely of stainless steel in order to achieve structural integrity and corrosion resistance while maintaining acceptable thermal conductivity through appropriate design. A cooling unit could consist of more than one liquid chamber connected in parallel by valves, as shown in FIG. **2**, regulated to maintain pressure difference between the chambers. Through suitable regulation, the liquids in more than one chamber could be made to boil simultaneously when chambers are placed in graded temperature environments, thereby providing for increased cooling over a short period. In FIG. **2**, the ambient air **T1** is cooled to a lower temperature **T2** by passing across the heat exchanger at temperature **t1**, **T2** then cools to a lower temperature **T3** by passing across heat exchanger at temperature **t2**. This cycle can be expanded by adding additional heat exchangers in parallel all of which could be computer controlled.

**[0025]** One configuration of the system would be a modular air-conditioning system comprising:

**[0026]** A power regulator that manages the power for the blowers and the temperature regulators,

**[0027]** A blower that circulates the cool air through the cool suit, sends cool air to the helmet, and cools the heat exchanger, and

**[0028]** Three or more solid adsorption cooling chambers (utilizing zeolite) staged in parallel. One in use, a second in stand by, and the third being recharged by the waste heat of the Motor Cycle exhaust.

**[0029]** The cool suit with air distribution channels can be configured to cover the whole body, or can be configured to cover the upper body only.

**[0030]** A helmet attachment for circulating clean cool breathable air to the helmet could be provided.

**[0031]** The system may be supplemented by thermoelectric modules after the solid adsorption cooling chambers.

[0032] Additionally, the system may be supplemented by using desiccant wheels, re-charged by waste heat, to manage the humidity in the cool suit and/or for the breathing air to the helmet.

[0033] The system could be applied as a personal cooling system to people other than Motor Cycle drivers and riders. For example, it could be used by military personnel, race car drivers, athletes, factory workers, ship crew, truck drivers, aircraft crew, and anyone else who seeks to cool their personal environment. The system could be applied to non-garment applications such as cooling of food, water, beverages, electronic equipment, mechanical equipment, medical equipment, medical supplies, blood, medicine, and air inside spaces such as small rooms and air, land and sea craft. Solid desiccant can be replaced by liquid desiccant. The system could be used in series or in parallel with other cooling technologies such as any of those mentioned above. Alternative heat sources could be used such as, concentrated sunlight, vehicle engine waste heat, industrial waste heat, and geothermal sources are also suitable. As to a further discussion on the manner and usage of the present invention, the same should be apparent from the above description. Numerous other modifications and changes would readily occur to those skilled in the art, and all suitable modifications and equivalents fall within the scope of the invention.

1. A personal cooling system for use in a Motor Cycle comprising:

- an air distribution module;
- at least one or more desiccant chambers under low pressure encircling at least one or more exhaust pipes of the Motor Cycle;
- at least one or more heat exchangers under low pressure;
- at least one or more air blowers blowing ambient air across the heat exchanger, cooling the air, transferring heat to the heat exchanger, transferring heat to the water, causing it to boil, and turning the water into vapor which is then adsorbed by the desiccant, the heat from the desiccant is then transferred to ambient air via flowing air;
- a heat source is then applied to the desiccant which releases the vapor that travels to one of the heat exchangers and condenses the vapor back into water;
- The cool air exiting from across the heat exchanger transferred to the cooling garment worn by a rider of the Motor Cycle;
- the cooling garment having a cool air input and an exhaust output;
- the cool air input receiving cooled air from the air blowers, and heated air from body heat exiting out the exhaust output.

2. The Motor Cycle personal cooling system of claim 1 wherein the desiccant chamber has a second inner layer close to its outer layer, that is made of perforated material that acts as an air channel for movement of water vapor and heat.

3. The Motor Cycle personal cooling system of claim 1, wherein the refrigerant of the above system is water and the desiccant is zeolite.

4. The Motor Cycle personal cooling system of claim 1, wherein additional cooling and humidity control is provided by embedded thermoelectric cooling in at least one garment worn by riders of the Motor Cycle.

5. The Motor Cycle personal cooling system of claim 1, which channels the cool air via a cool suit with air distribution channels wherein the suit could be configured to cover the upper body only.

6. The Motor Cycle personal cooling system of claim 1, wherein the system is supplemented by using desiccant wheels, re-charged by waste heat, to manage the humidity in the cool suit.

7. The Motor Cycle personal cooling system of claim 1, which provides breathing air to the helmet.

8. The Motor Cycle personal cooling system of claim 1, wherein the cooling unit consists of a series of liquid chambers connected by valves regulated to maintain pressure differences between the chambers; the valves regulating more than one chamber and make the refrigerant in the chambers boil simultaneously when the chambers are placed in a graded temperature environment, thereby providing for increased cooling over a short period of time.

9. The Motor Cycle personal cooling system of claim 1, wherein the desiccant chambers are constructed encircling the exhaust pipe allowing the transference of heat from exhaust heat.

10. The Motor Cycle personal cooling system of claim 1, wherein the desiccant chamber has a second inner layer close to its outer layer, that is made of perforated material which acts as an air channel for efficient movement of water vapor and heat.

11. The Motor Cycle personal cooling system of claim 1, wherein the refrigerant of the above system is water and the desiccant is zeolite.

12. The Motor Cycle personal cooling system of claim 1, wherein additional cooling and humidity control is provided by embedding a thermoelectric unit in garment worn by riders using the personal cooling system.

\* \* \* \* \*