



US006089034A

United States Patent [19][11] **Patent Number:** **6,089,034****Lake et al.**[45] **Date of Patent:** **Jul. 18, 2000**

[54] **CONTROLLER FOR REVERSIBLE AIR
CONDITIONING AND HEAT PUMP HVAC
SYSTEM FOR ELECTRIC VEHICLES**

[75] Inventors: **Barry J. Lake; David A. Barwin**, both
of Troy; **Richard Harris**, Holly, all of
Mich.; **Lance C. Tagliapietra**, Winona,
Minn.

[73] Assignee: **DaimlerChrysler Corporation**, Auburn
Hills, Mich.

[21] Appl. No.: **09/190,472**

[22] Filed: **Nov. 12, 1998**

[51] **Int. Cl.**⁷ **F25B 41/04; F25B 1/00**

[52] **U.S. Cl.** **62/204; 62/228.3; 62/228.4**

[58] **Field of Search** 62/228.4, 204,
62/228.3

[56] **References Cited**

U.S. PATENT DOCUMENTS

4,007,315	2/1977	Brinkmann et al.	429/62
4,835,976	6/1989	Torrence	62/204 X
5,161,388	11/1992	Fujita et al.	62/204 X
5,299,431	4/1994	Iritani et al.	62/243
5,316,074	5/1994	Isaji et al.	165/43
5,320,190	6/1994	Naumann et al.	180/68.2
5,385,793	1/1995	Tiedemann et al.	429/158
5,395,708	3/1995	Hall	429/120
5,467,605	11/1995	Hennessee et al.	62/133
5,490,572	2/1996	Tajiri et al.	180/65.1


5,501,267	3/1996	Iritani et al.	165/43 X
5,537,831	7/1996	Isaji et al.	62/228.4
5,547,125	8/1996	Hennessee et al.	236/49.3
5,549,153	8/1996	Baruschke et al.	165/42
5,557,941	9/1996	Hanson et al.	62/160
5,605,051	2/1997	Iritani et al.	62/160


Primary Examiner—William Wayner



[57] **ABSTRACT**

A control system for controlling a reversible HVAC system of a motor vehicle is disclosed. The HVAC system includes an electric compressor for circulating a refrigerant through a heat pump. The speed of the compressor is controlled by a compressor control signal having a variable duty cycle. Inside and outside heat exchangers transfer heat energy between an outside environment and a passenger compartment of the motor vehicle. A refrigerant flow switching device switches the direction of refrigerant flow towards the inside heat exchanger in a heating mode and towards the outside heat exchanger in a cooling mode. A pressure reducing assembly supplies pressure reduced refrigerant to the inside heat exchanger in the cooling mode and to the outside heat exchanger in the heating mode. The pressure reducing assembly includes an electronic expansion valve in which the flow rate is set by an EXV control signal having a variable duty cycle. A controller controls the duty cycle setting of the compressor control signal and the EXV control signal such that a desired quantity of heat is transferred between the outside environment and the passenger compartment.

9 Claims, 15 Drawing Sheets

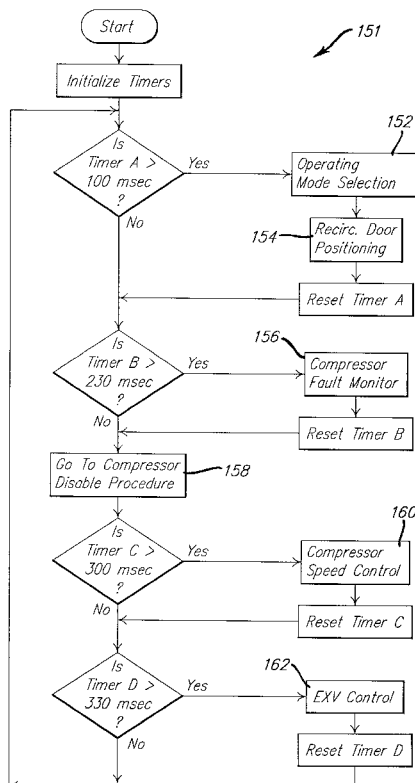

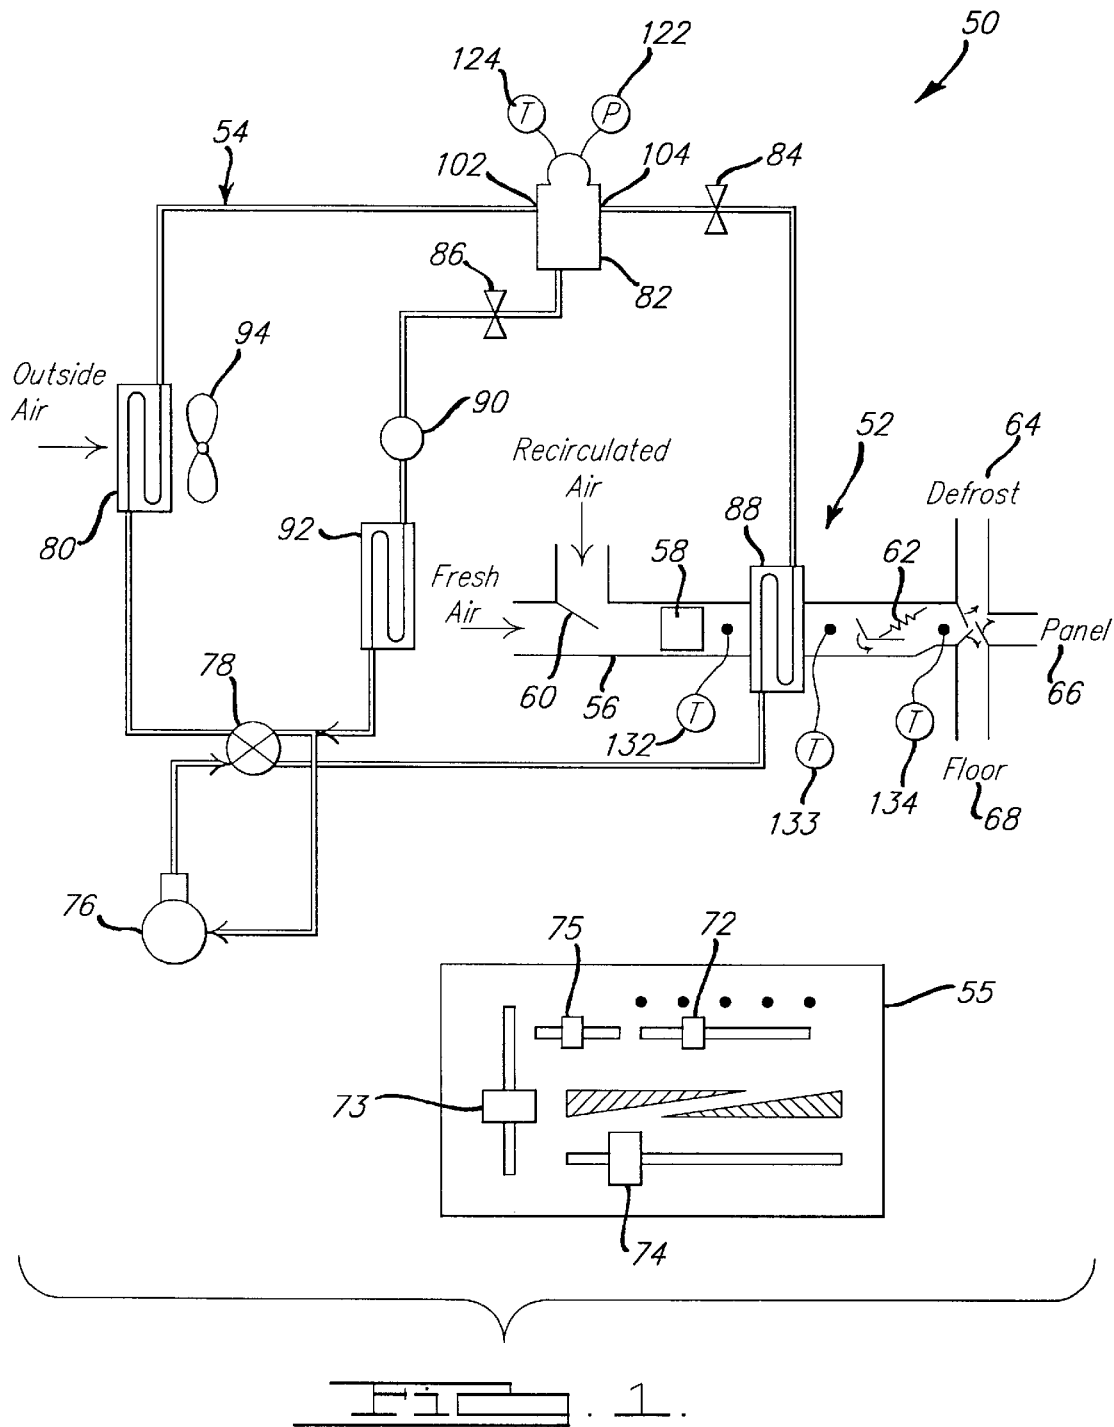

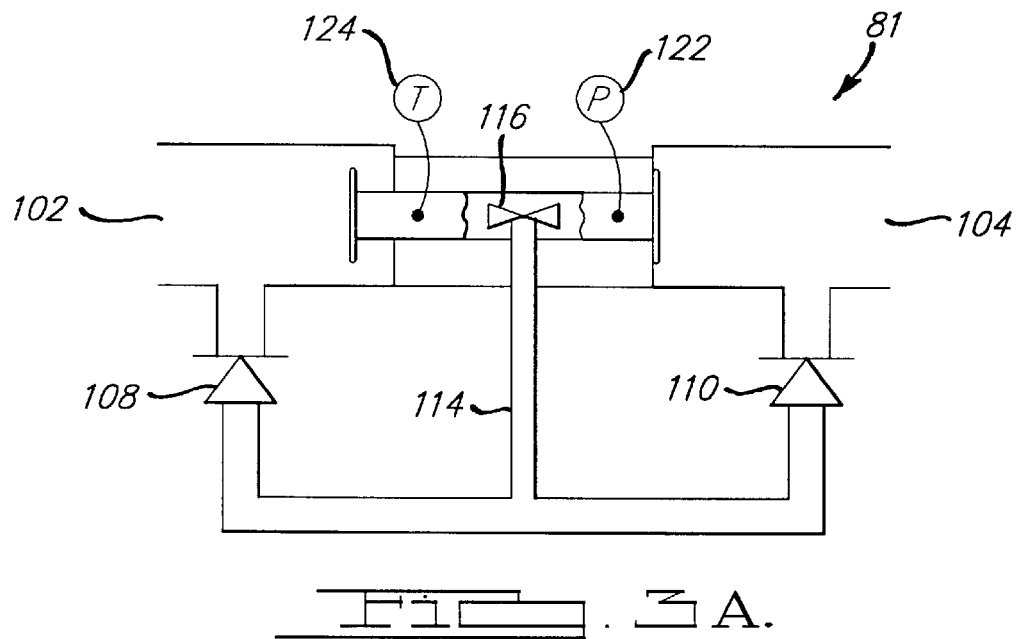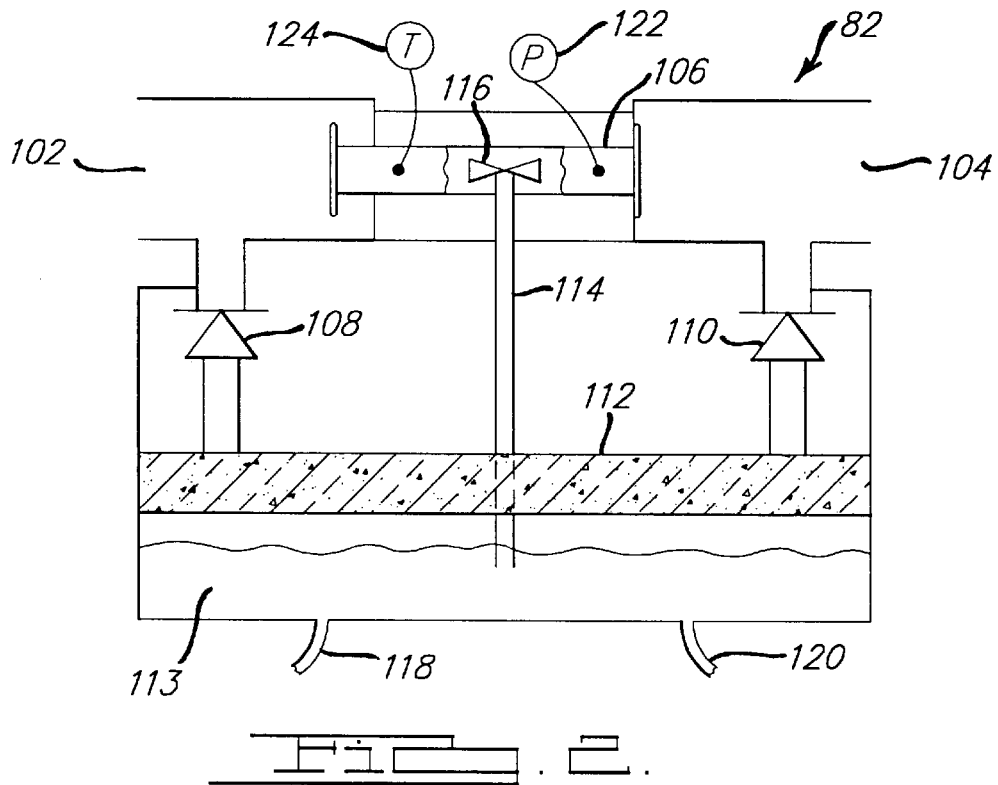

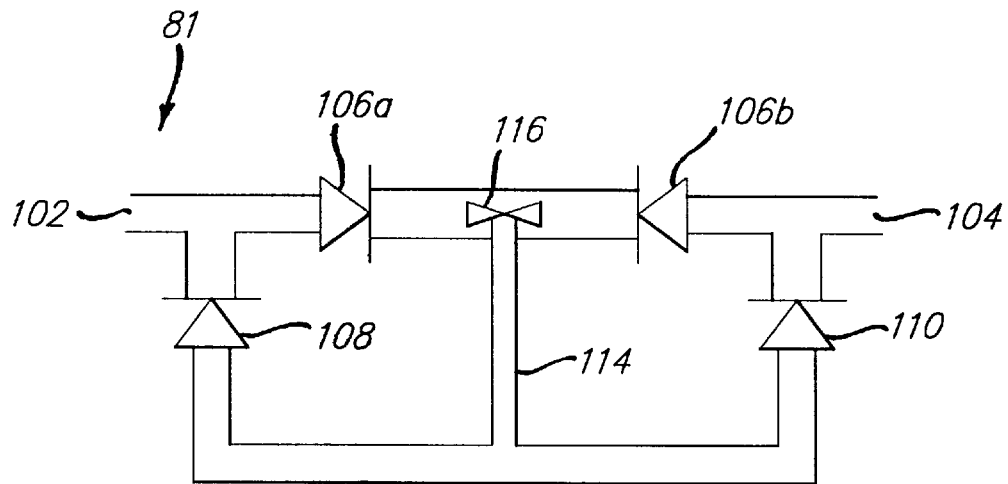


FIG. 3B.

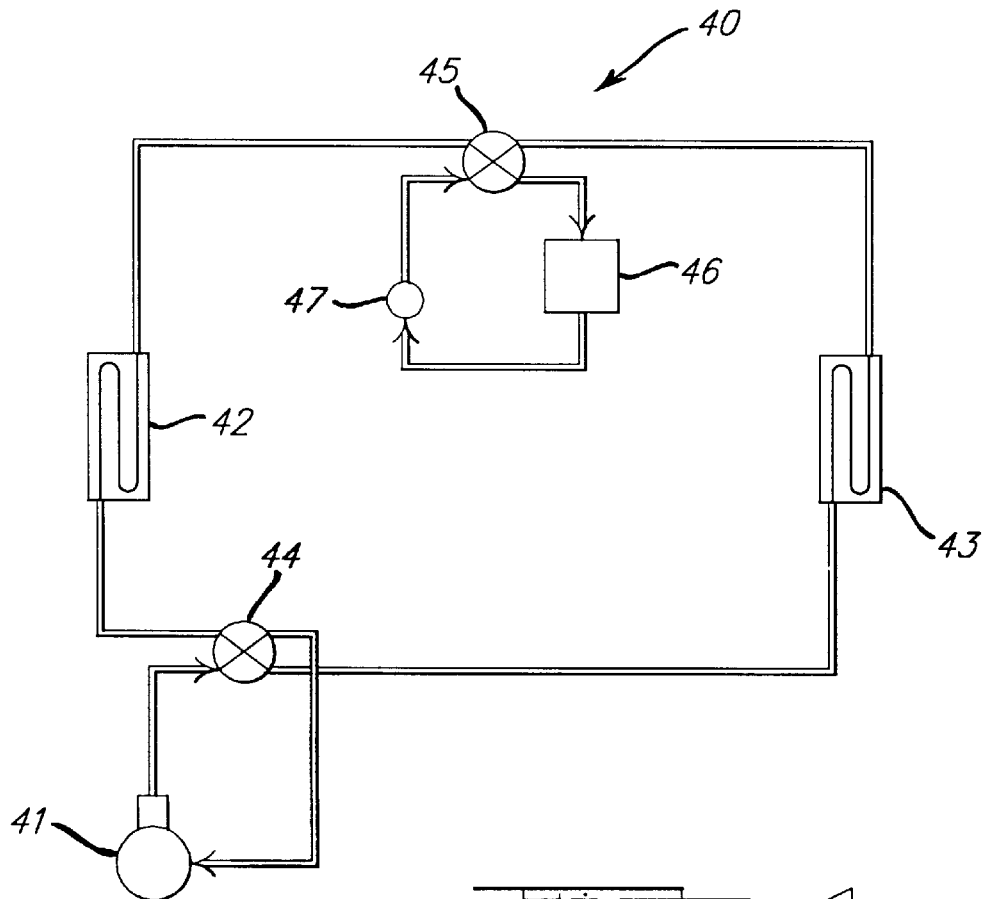


FIG. 4.

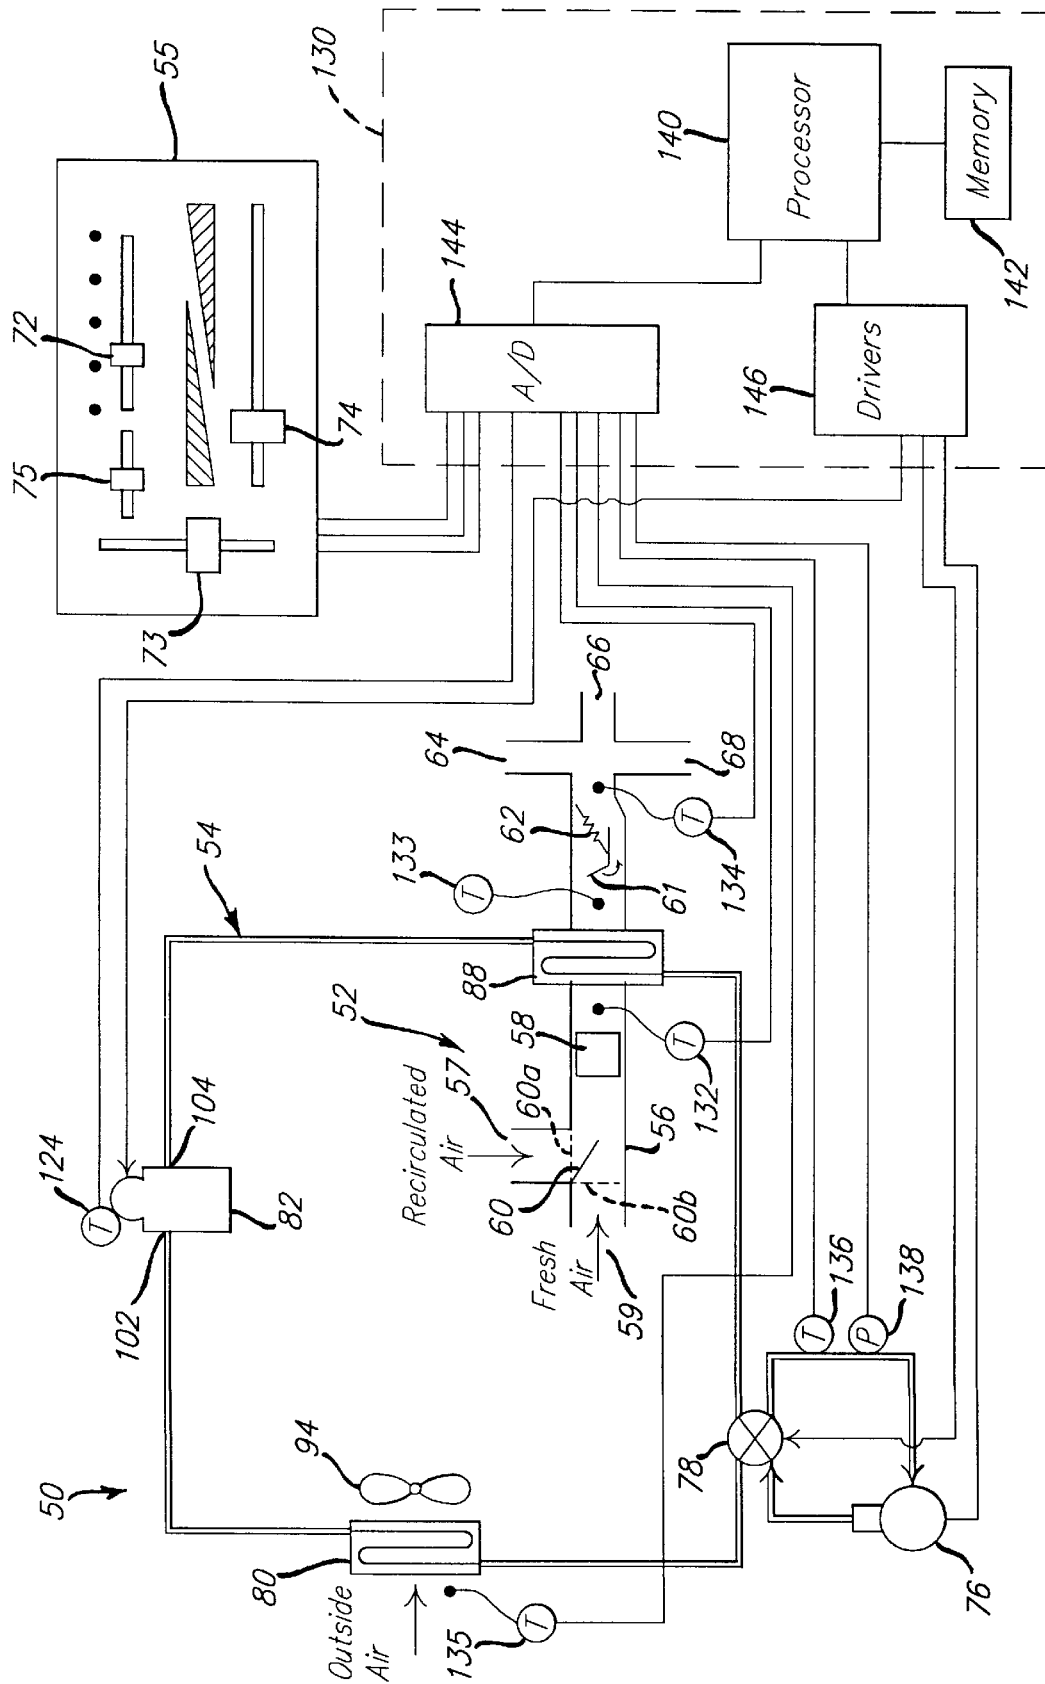


FIG. 5.

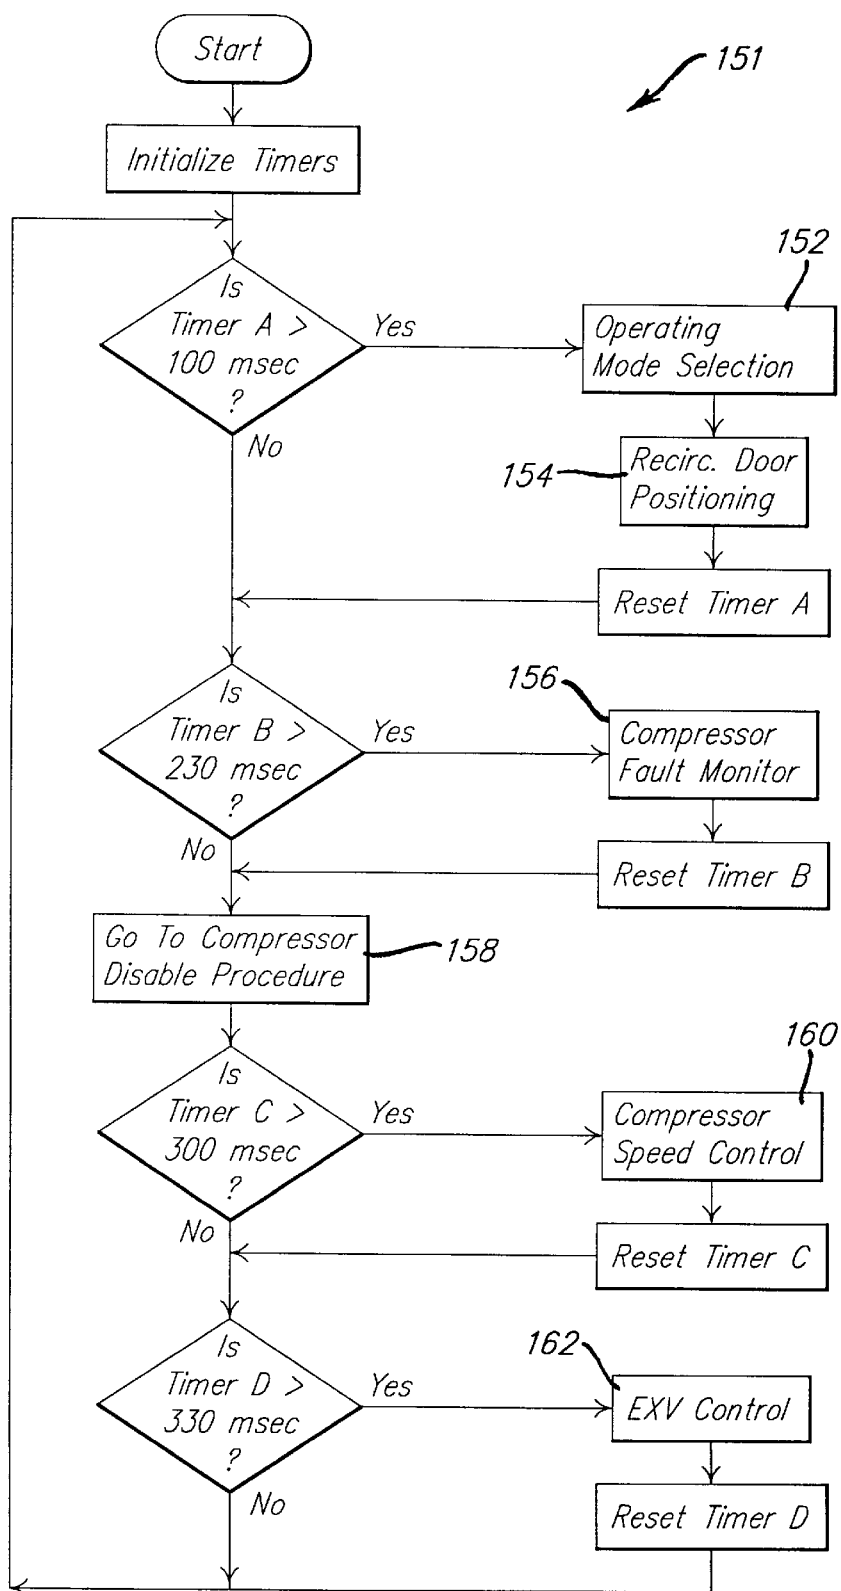
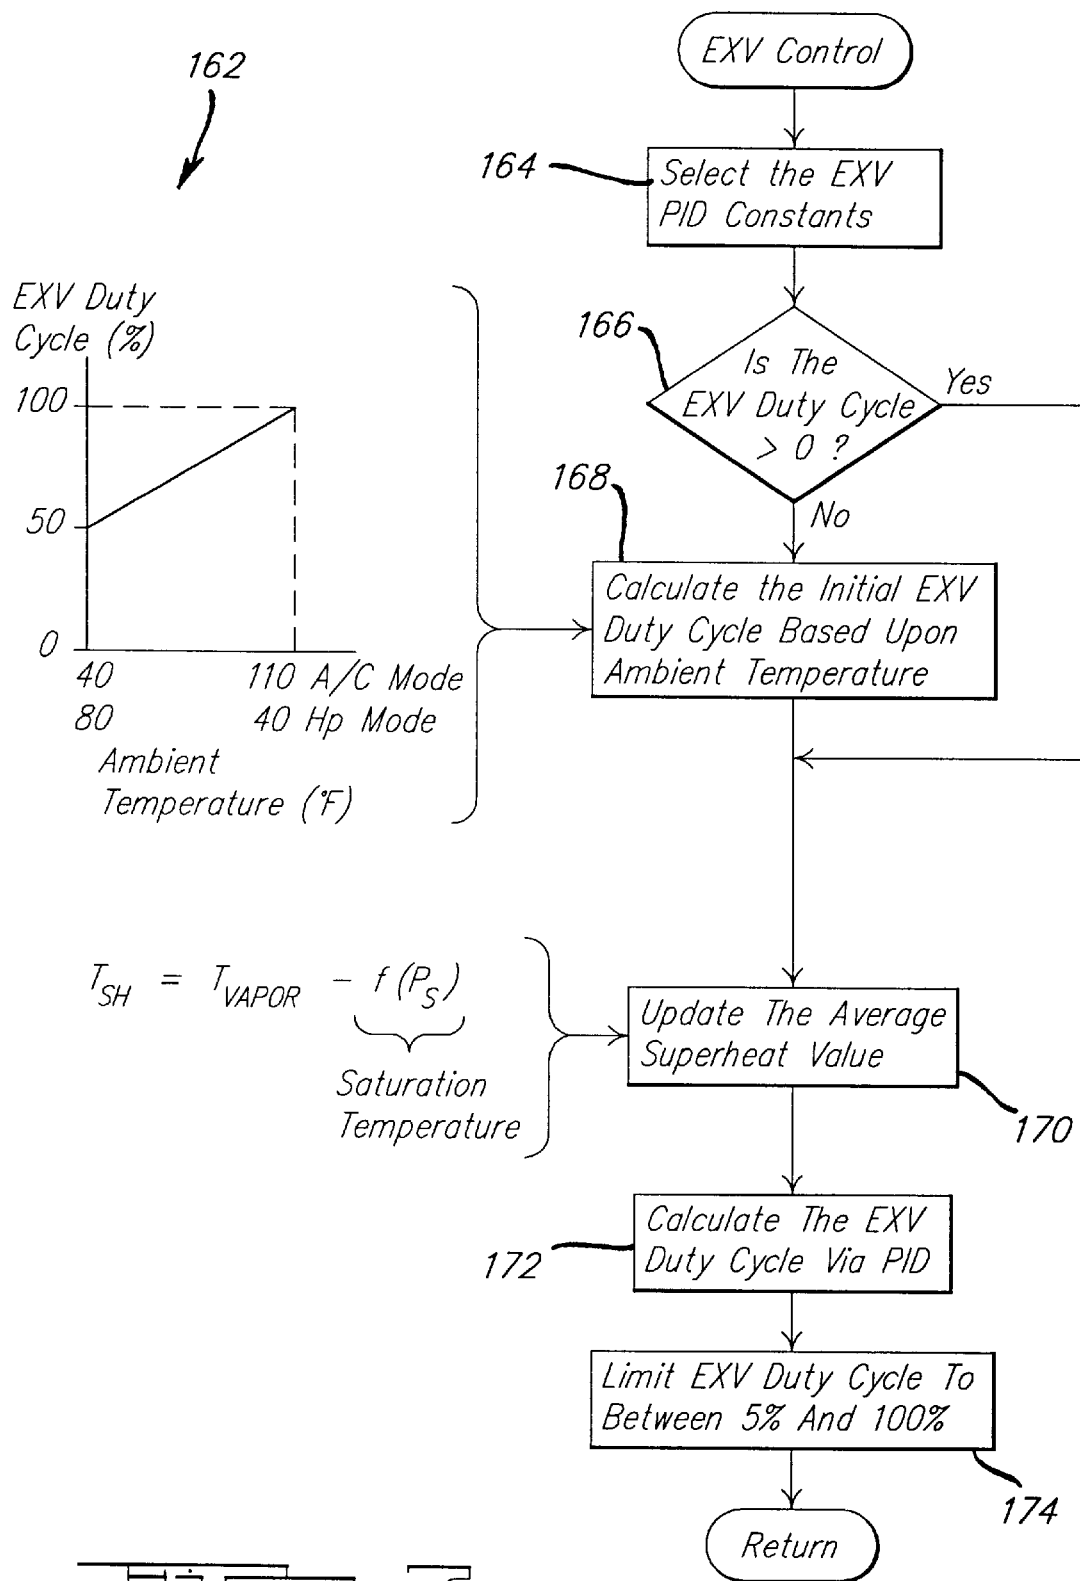


FIG. 6.



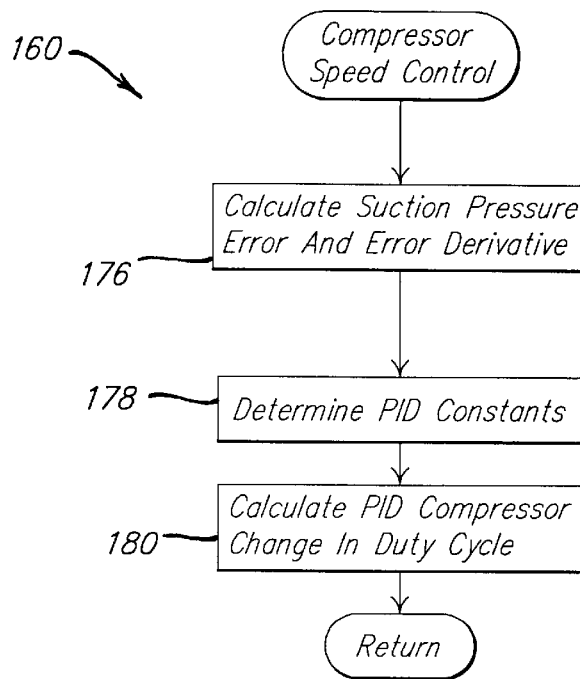


FIG. 8.

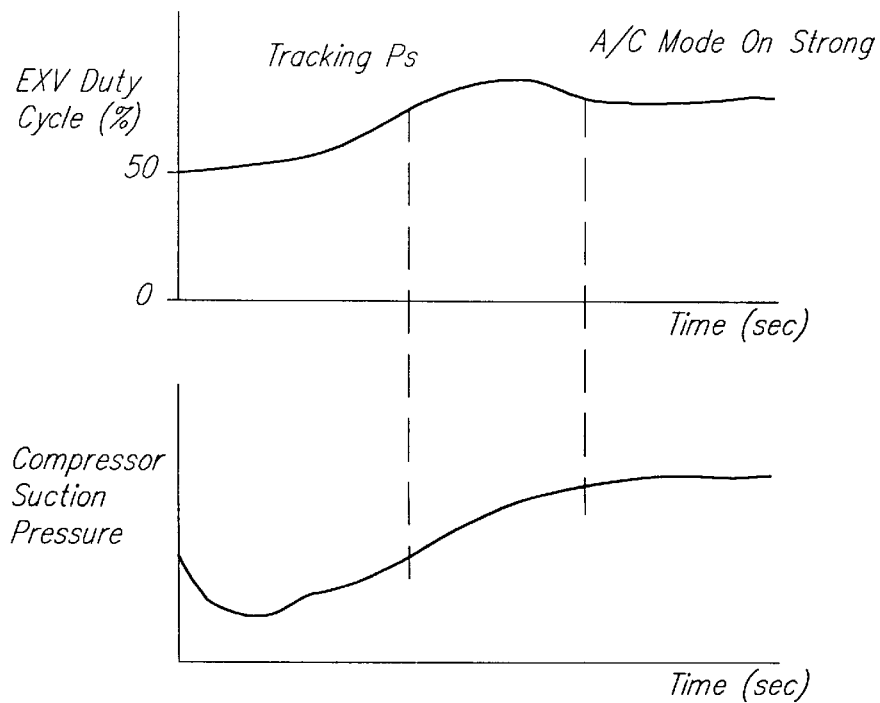


FIG. 9.

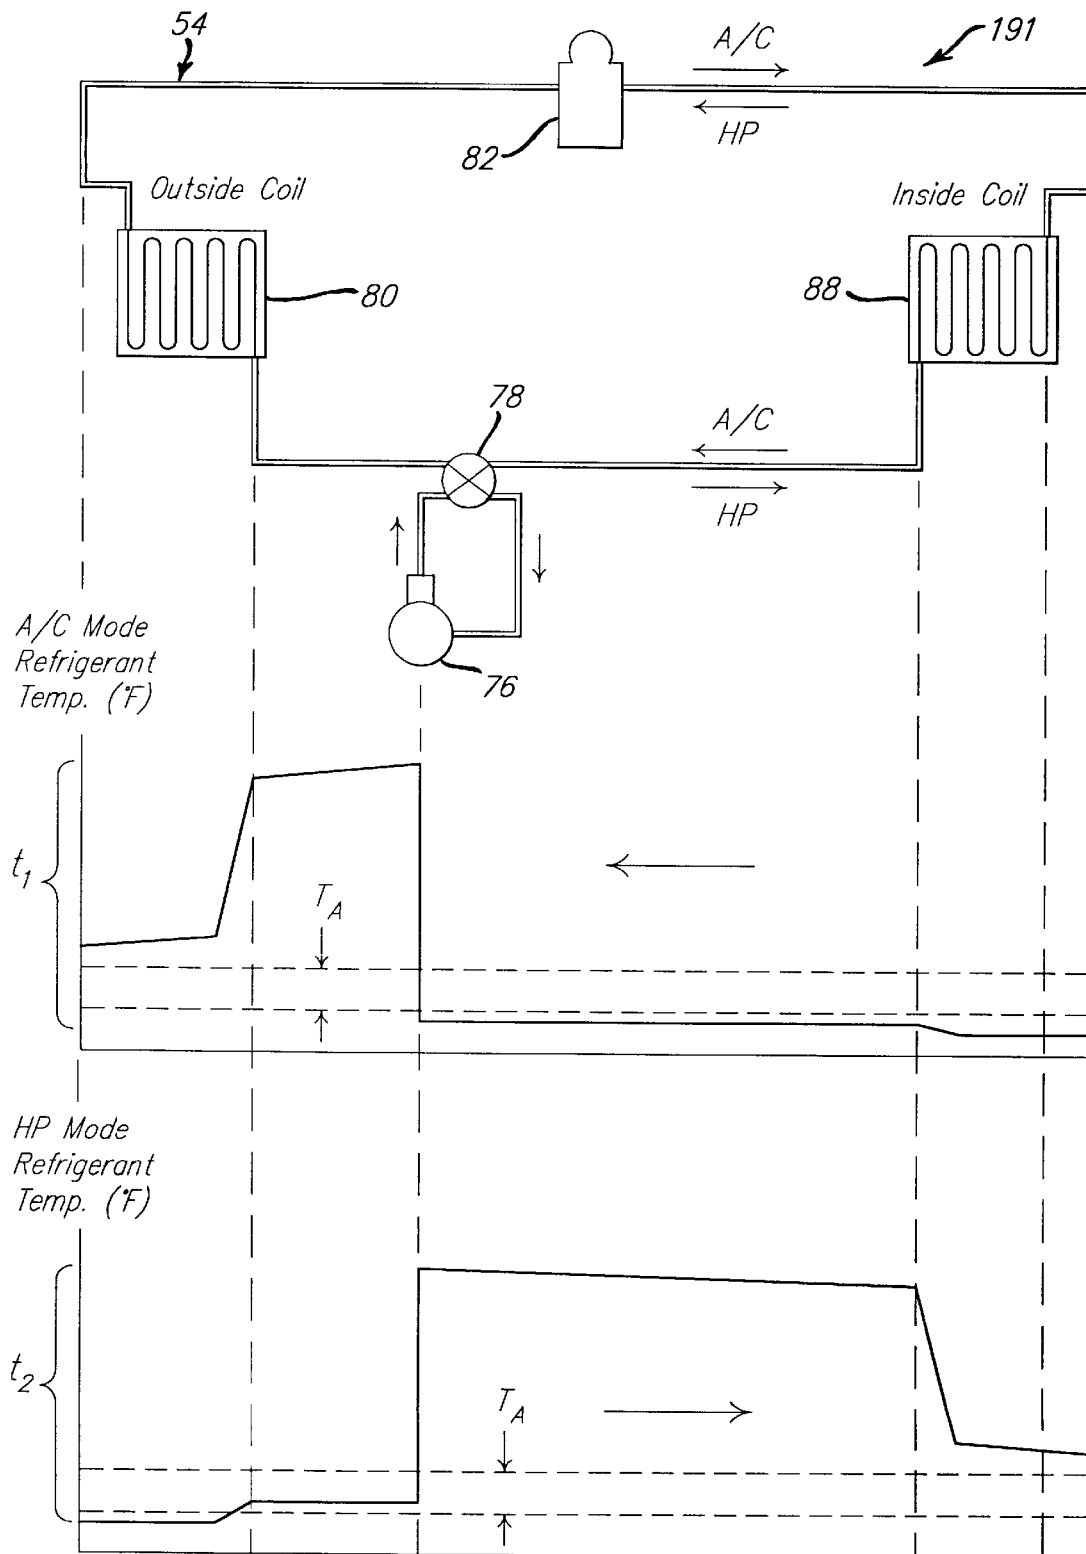
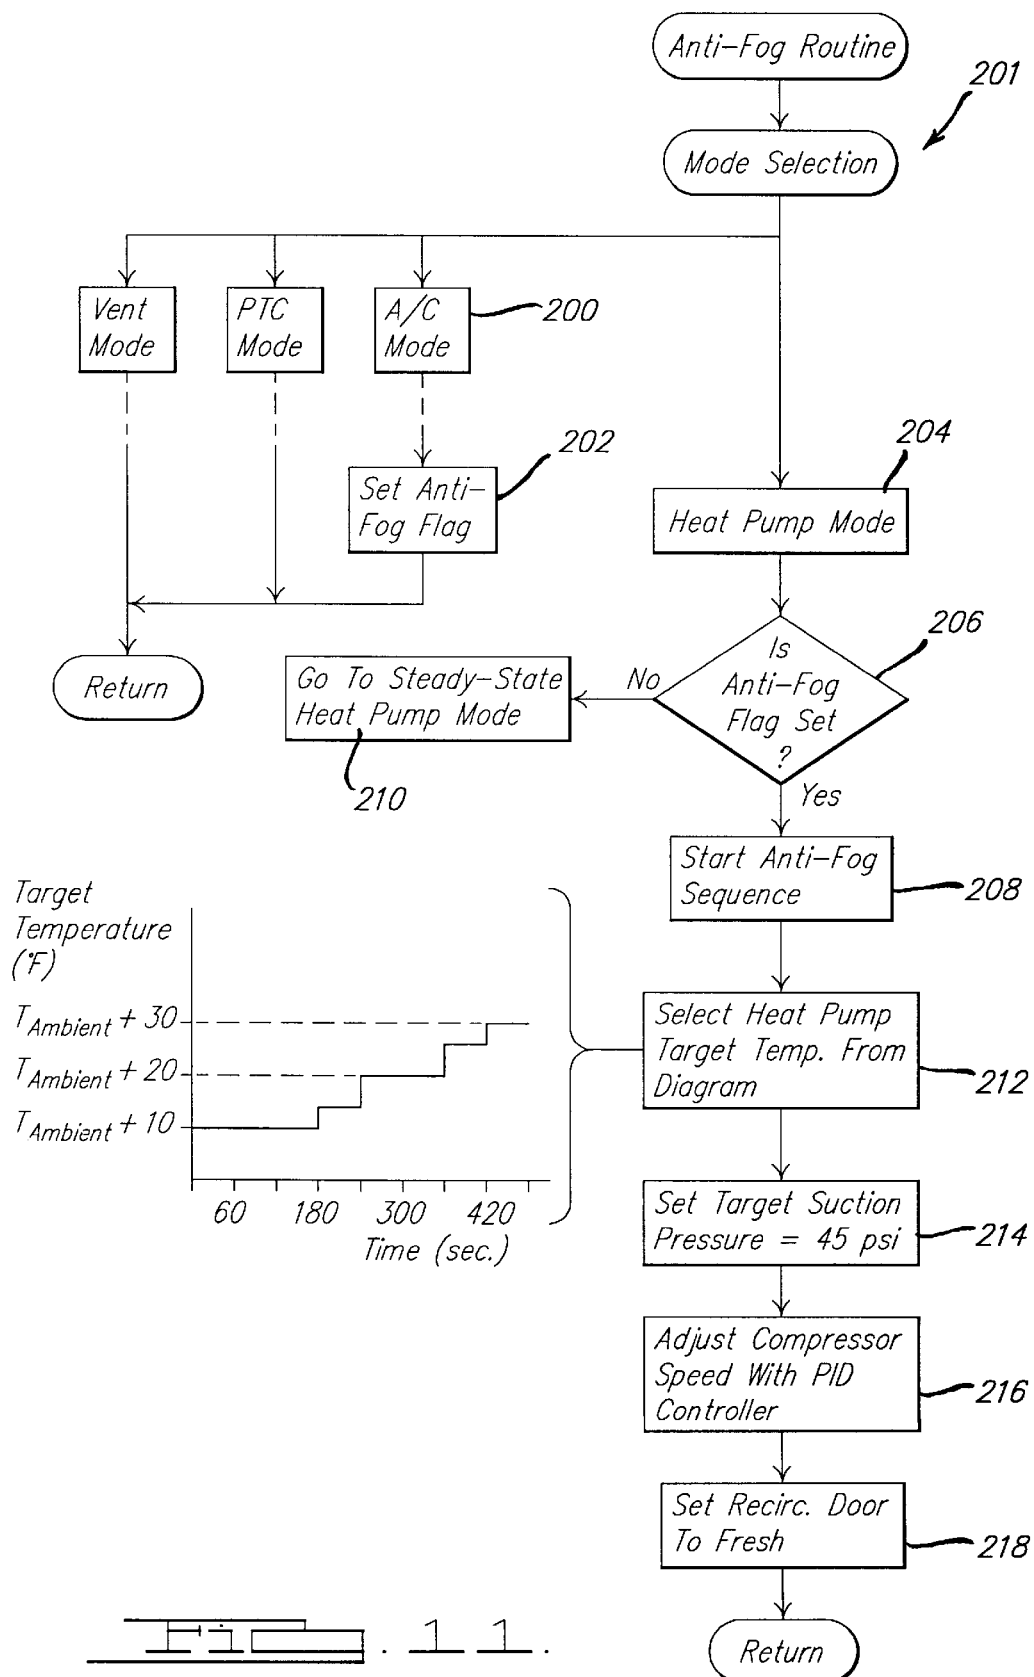
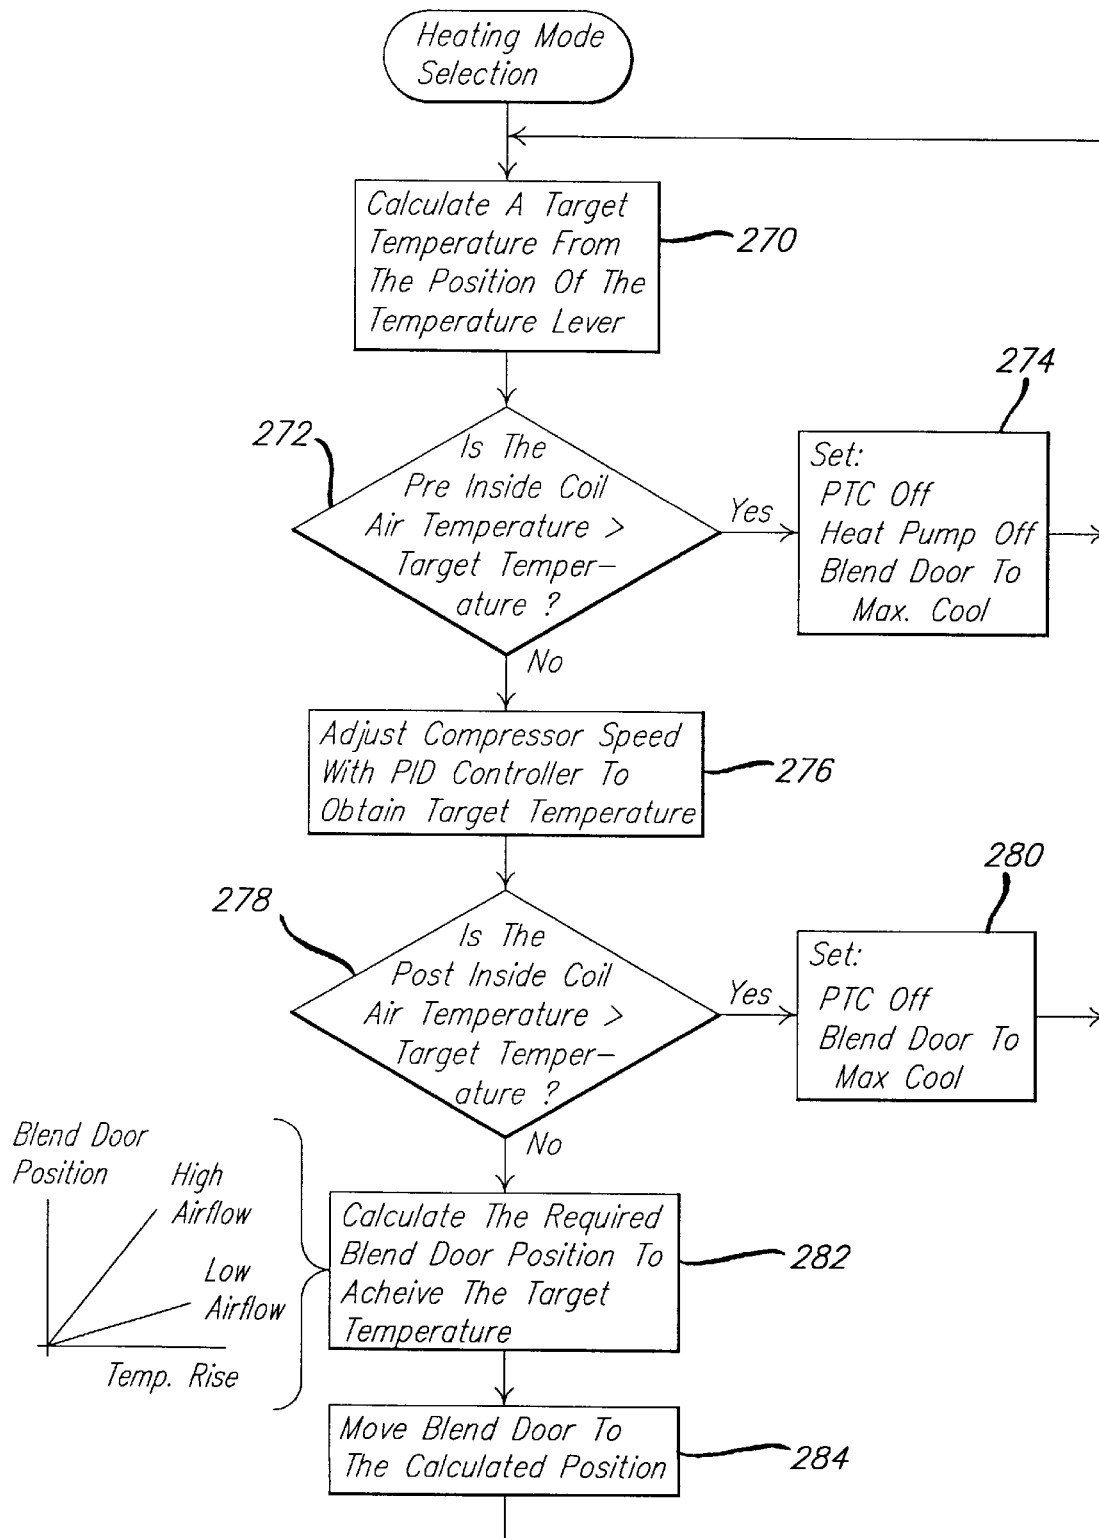
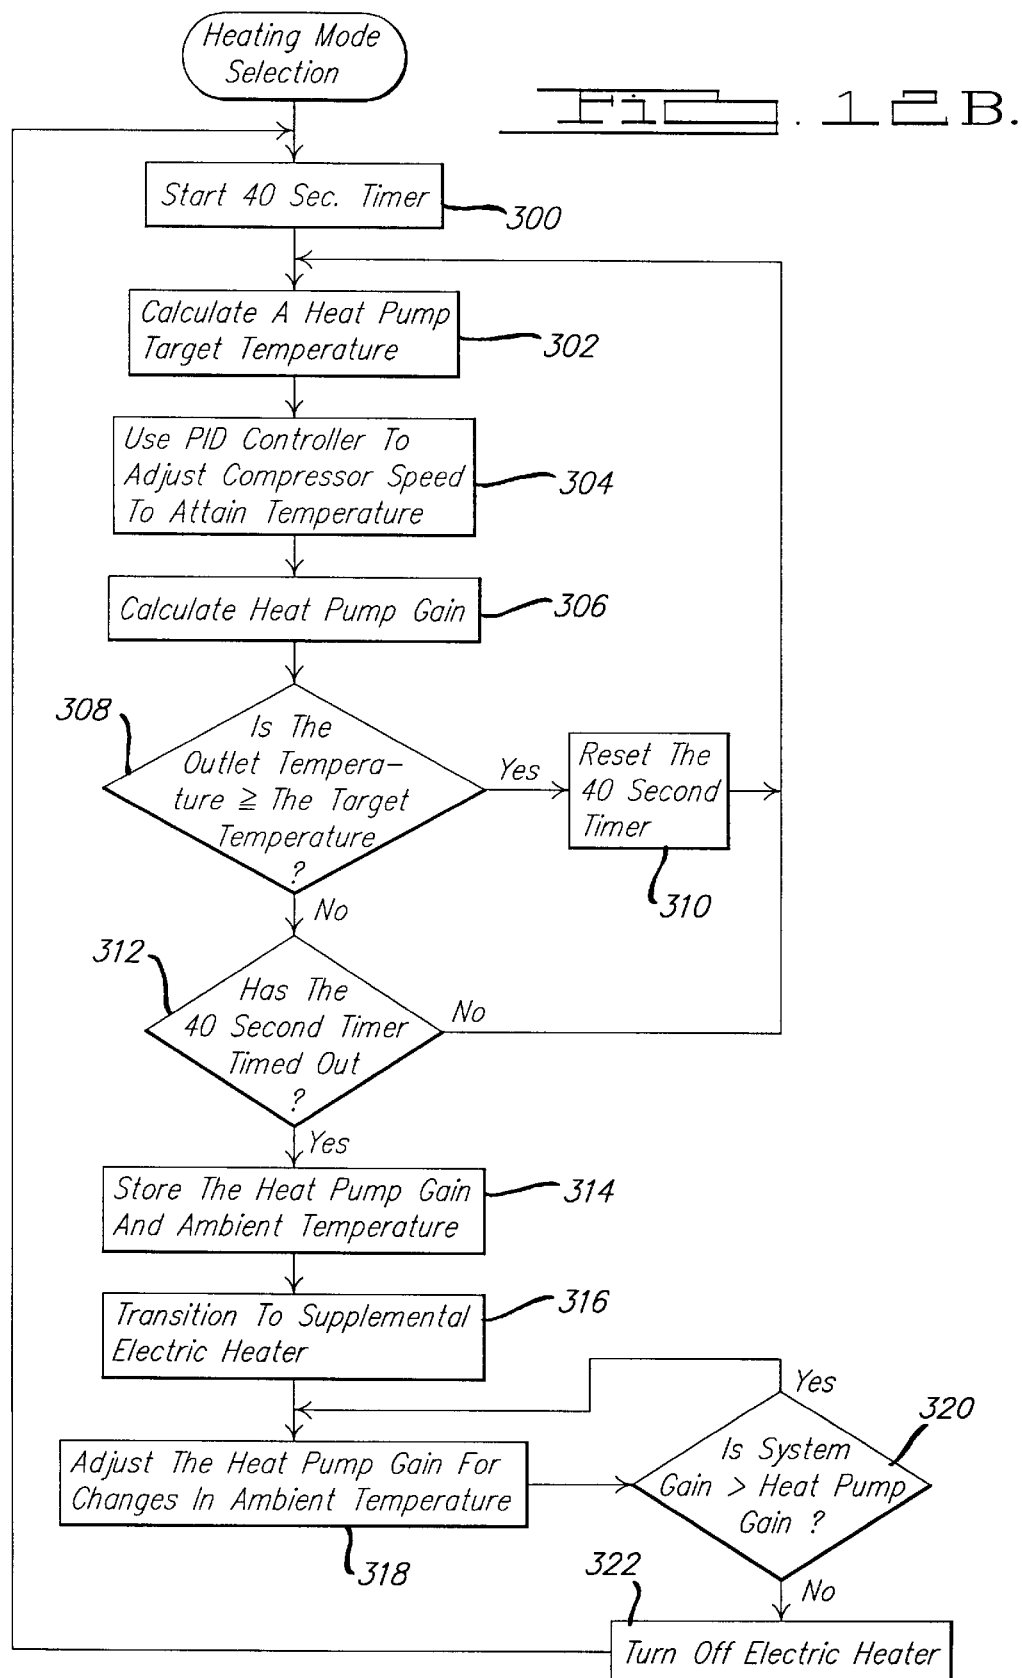
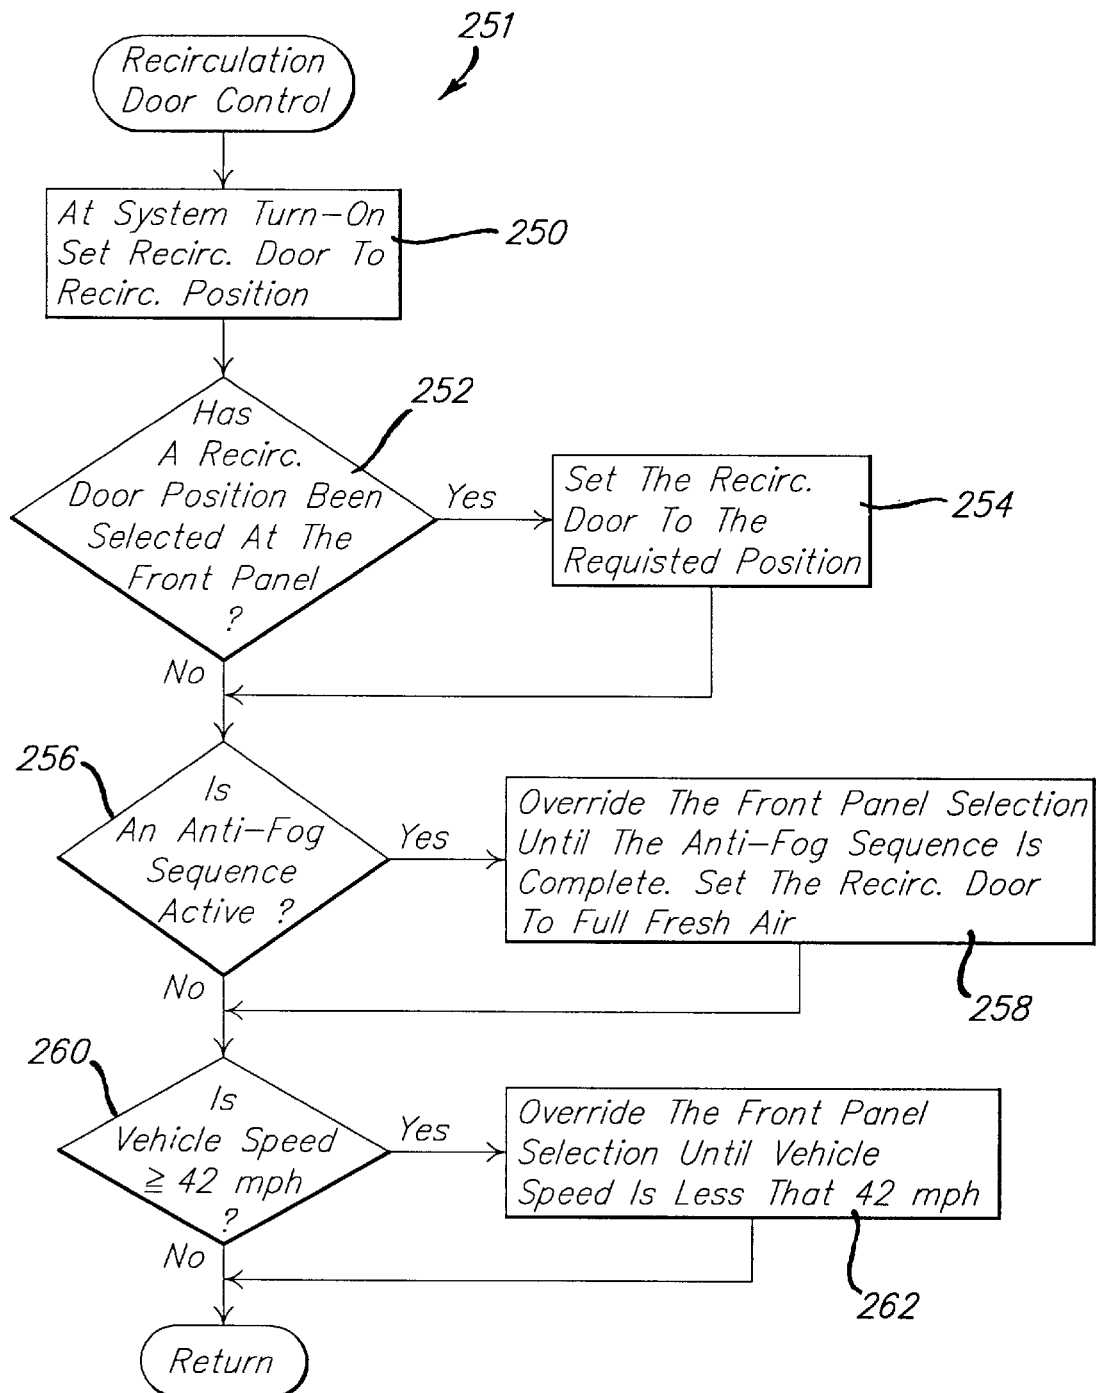


FIG. 10.



FIG. 12A.



Fig. 13.



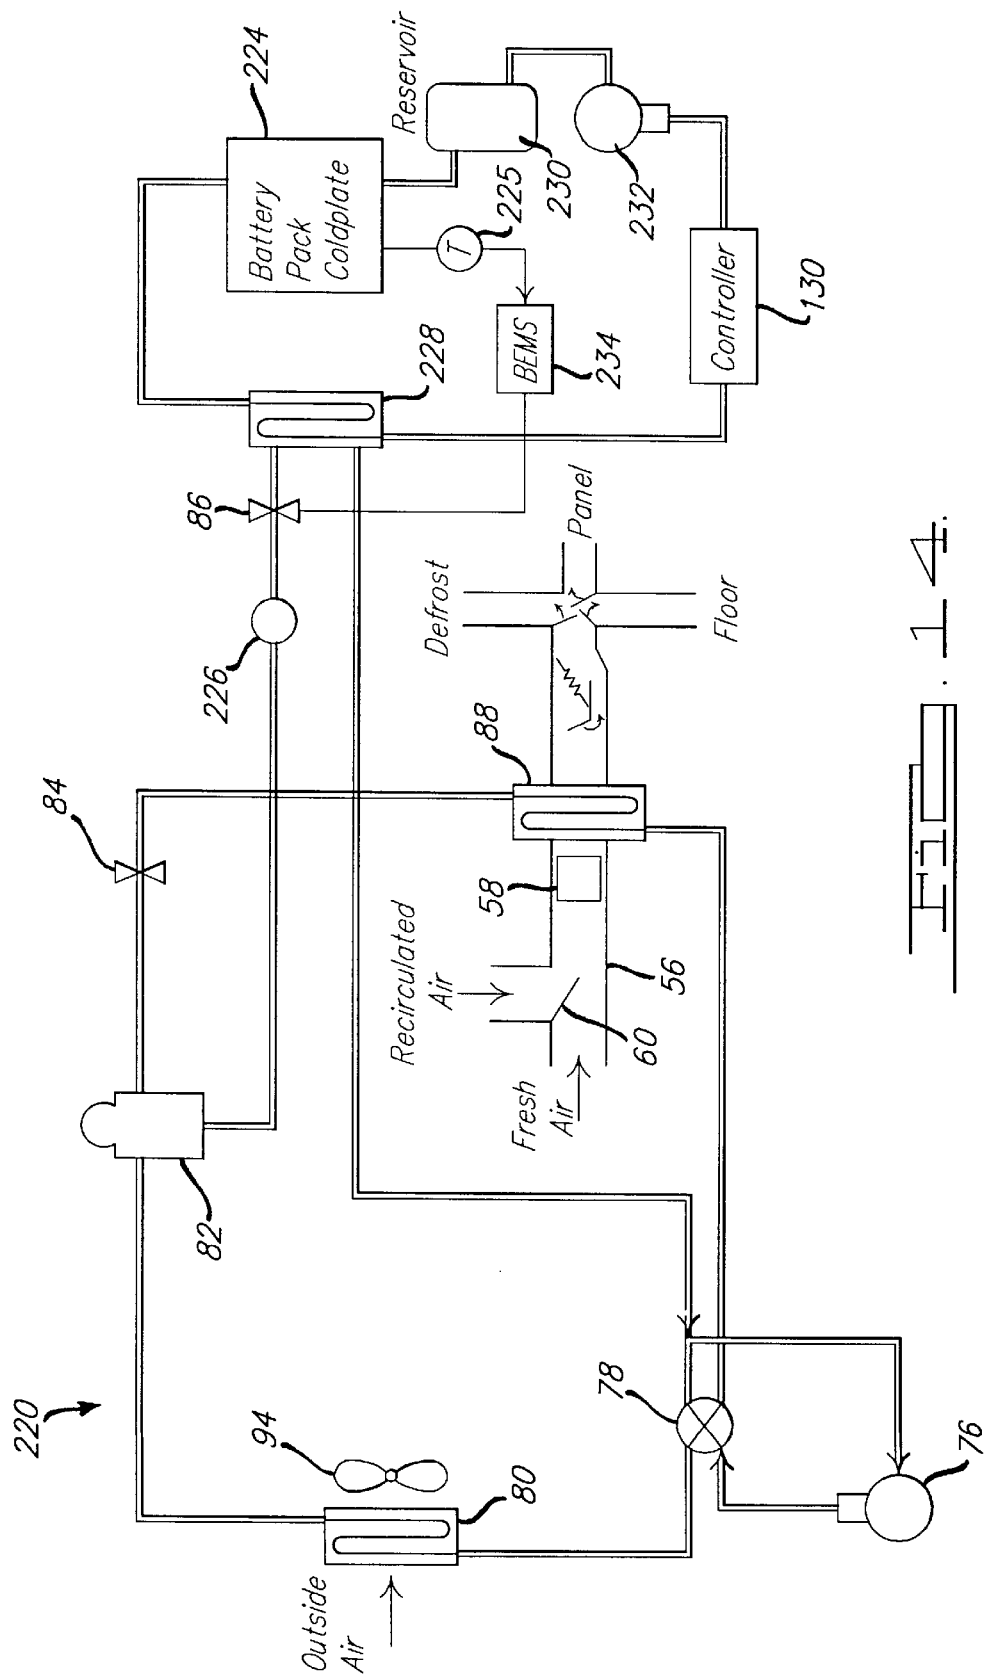


FIG. 14.

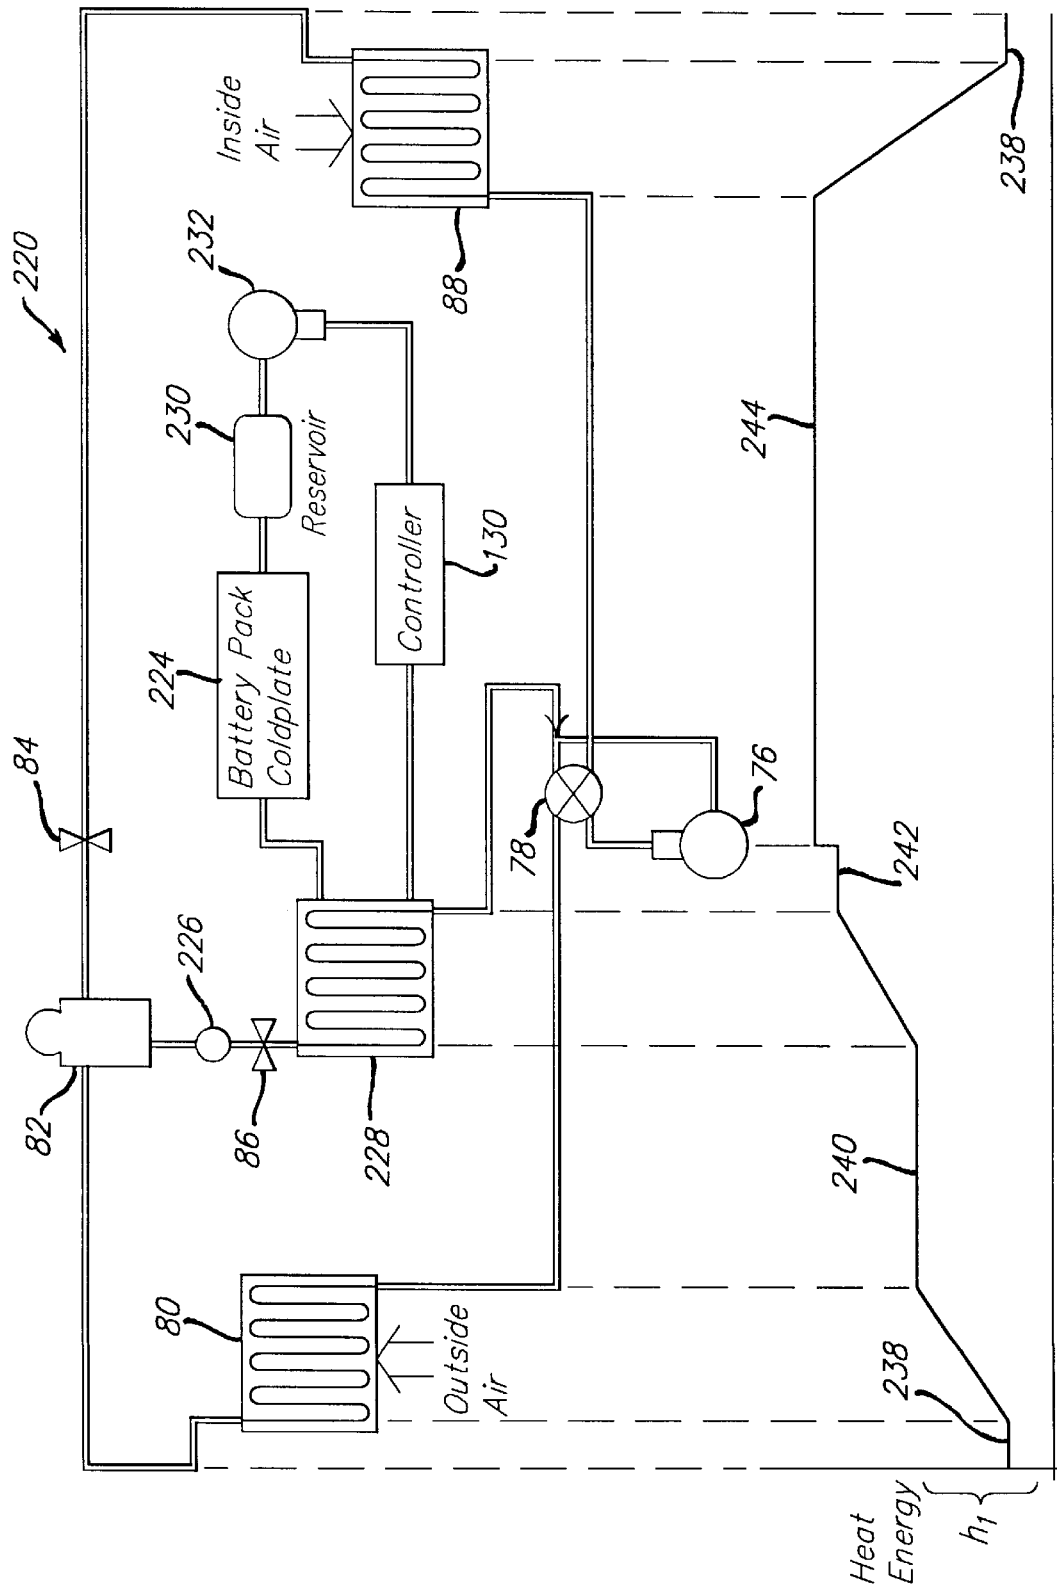

$\frac{1}{2}$

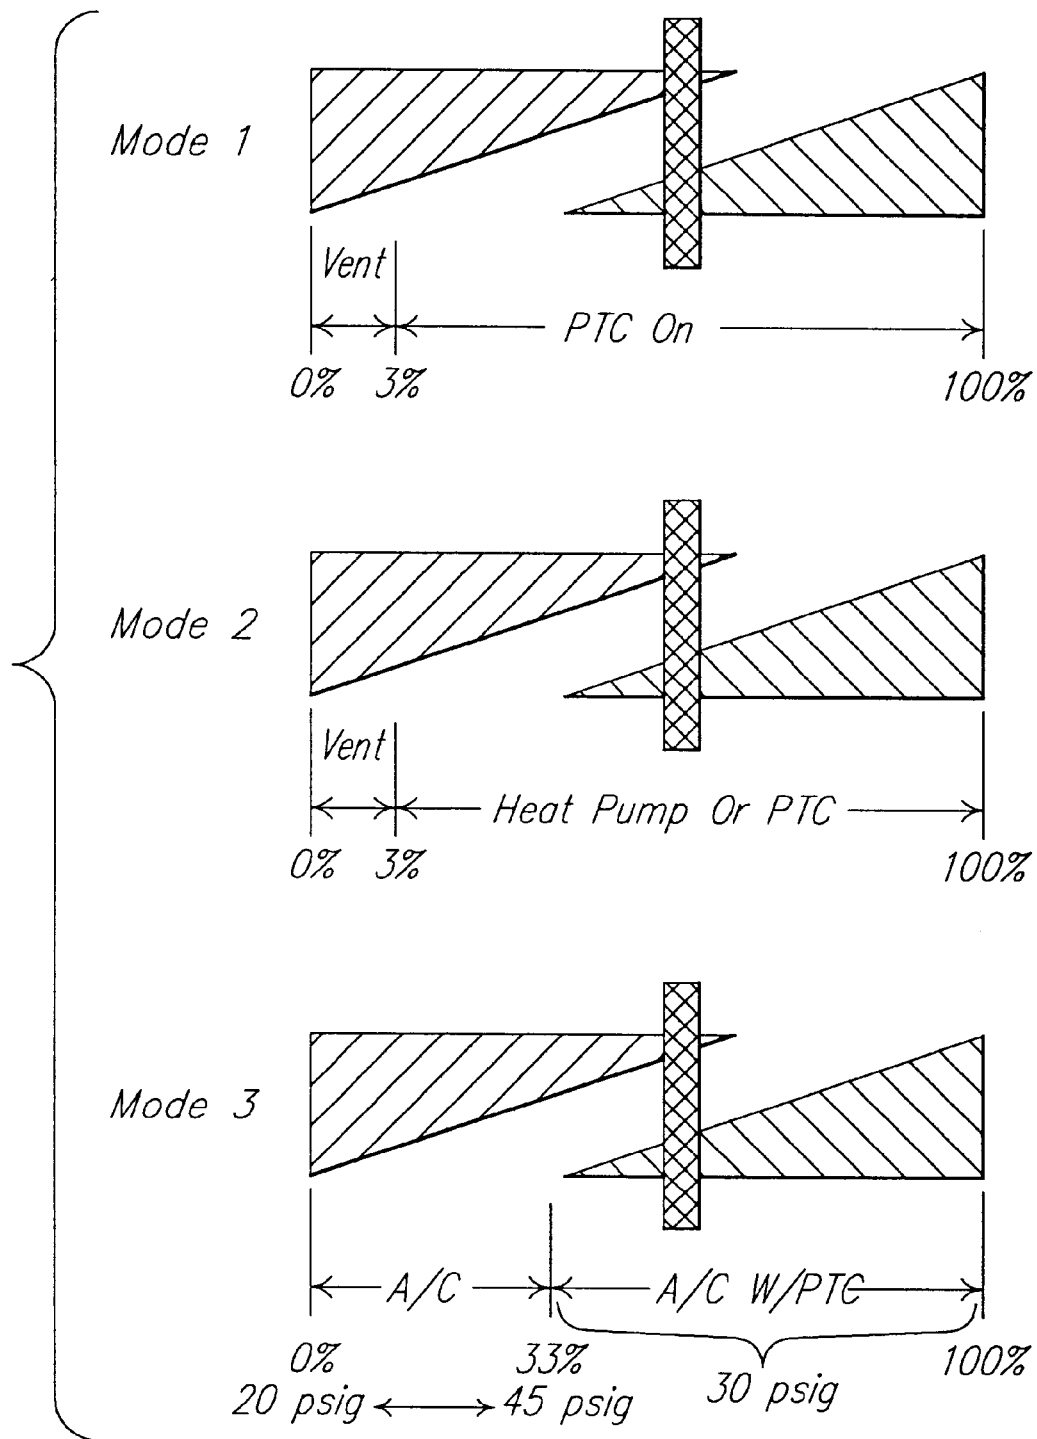

CONTROLLER FOR REVERSIBLE AIR CONDITIONING AND HEAT PUMP HVAC SYSTEM FOR ELECTRIC VEHICLES

BACKGROUND AND SUMMARY OF THE INVENTION

The present invention relates generally to automotive HVAC systems for controlling the environment of an automobile passenger compartment. More particularly, the invention relates to a system for controlling the operating modes in an automotive HVAC system.

This application is related to co-pending applications all filed on Nov. 12, 1998 and titled Refrigerant Flow Management Center For Automobiles, Reversible Air Conditioning And Heat Pump HVAC System For Electric Vehicles, Anti-Fog Controller For Reversible Air Conditioning And Heat Pump HVAC System For Electric Vehicles, Controller For Heating In Reversible Air Conditioning And Heat Pump HVAC System For Electric Vehicles, Air Handling Controller For Hvac System For Electric Vehicles, and System For Cooling Electric Vehicle Batteries. Each of these applications is incorporated by reference into the present application.

Automotive climate control systems have traditionally been single loop designs in which the full volume of refrigerant flows through each component in the system. In an HVAC system, refrigerant in the vapor phase is pressurized by a compressor or pump. The pressurized refrigerant flows through a condenser which is typically configured as a long serpentine coil. As refrigerant flows through the condenser heat energy stored in the refrigerant is radiated to the external environment resulting in the refrigerant transitioning to a liquid phase. The liquefied refrigerant flows from the condenser to an expansion valve located prior to an evaporator. As the liquid flows through the expansion valve it is converted from a high pressure, high temperature liquid to a low pressure, low temperature spray allowing it to absorb heat. The refrigerant flows through the evaporator absorbing heat from the air that is blown through the evaporator fins. When a sufficient amount of heat is absorbed the refrigerant transitions to the vapor phase. Any further heat that is absorbed pushes the vaporized refrigerant into the superheated temperature range where the temperature of the refrigerant increases beyond the saturation temperature. The superheated refrigerant flows from the outlet of the evaporator to the compressor where the cycle repeats. Generally, the refrigerant flowing into the compressor should be in the vapor phase to maximize pumping efficiency. The operation of the refrigerant loop in conventional automotive HVAC systems is controlled by cycling the compressor on and off, and by varying the volume of refrigerant that is permitted to flow through the expansion valve. Increasing the volume of refrigerant that flows through the valve lengthens the distance traversed by the liquid before it changes to the vapor phase, allowing the heat exchanger to operate at maximum efficiency.

Advances in automotive HVAC systems have led to zone temperature control systems wherein different zones of an automobile are independently controlled. Zone control systems generally include an evaporator and expansion valve for each zone. Generally, the refrigerant flows through a compressor and condenser, then is split by a system of valves before flowing to the expansion valve and evaporator of each zone. The refrigerant flowing out of the evaporator of each zone is then recombined before returning to the compressor. A complex series of valves and plumbing is

generally required to maintain a balanced HVAC system that provides individualized control for each of the zones. The refrigerant plumbing associated with zone control systems is significantly more complex than the plumbing of prior single loop designs.

The complexity of refrigerant plumbing has further increased with the recent implementation of reversible heat pump systems in automobiles. In a reversible heat pump system the HVAC system can either heat or cool a compartment depending on the direction of the refrigerant flow. In the air conditioning mode refrigerant flows from the compressor through an outside coil (condenser) and into an expansion valve and inside coil (evaporator) before returning to the compressor. Heat energy is extracted from air that is blown through the inside coil (evaporator) into the passenger compartment thus providing cooled air. In the heating mode a four way valve reverses the flow of refrigerant through the coils, thereby reversing the function of the coils. Refrigerant flows from the compressor through the inside coil (condenser) then into an expansion valve and the outside coil (evaporator) before returning to the compressor. Heat energy in the liquefied refrigerant flowing through the inside coil is absorbed by air that is blown through the coil into the passenger compartment thus providing heated air. For the reversible system to operate, valves with associated plumbing must be provided to bypass one of the expansion valves during each mode. When zone control is added to a reversible heat pump system the complexity and cost of the HVAC further increases. In addition to excessive cost the system becomes less reliable due to the increased number of valves, plumbing, and control software required for the system.

A solution to this problem is presented in co-pending U.S. patent application titled Reversible Air Conditioning And Heat Pump Hvac System For Electric Vehicles and filed on Nov. 12, 1998. The disclosed invention simplifies the interconnection of automotive HVAC systems by providing a multi-port flow management device to replace the complex nest of valves and plumbing required in conventional systems. When the HVAC system is in the air conditioning mode, refrigerant flows into one of the ports of the flow management device then through a single expansion valve and out the other input/output port. When the system reverses the refrigerant flow and enters heat pump mode the refrigerant flows into the input/output port it previously flowed out of, then flows through the expansion valve and out the other port. By providing bi-directional input/output ports the disclosed invention eliminates the complex plumbing and extra valves associated with conventional systems. In addition, the disclosed invention can further integrate the receiver/drier function into the flow management device providing a centralized flow management center for tapping off refrigerant flow for secondary zone control cooling loops.

Generally, conventional systems control the operation of HVAC systems by regulating the expansion valve and the compressor. The volume of saturated refrigerant emitted from the expansion valve is regulated to ensure the refrigerant transitions to the vapor state at the outlet of the evaporator. As atomized refrigerant is emitted from the expansion valve its temperature rapidly decreases to the saturation temperature corresponding to the compressor suction pressure. The temperature remains relatively constant as the refrigerant traverses the evaporator accumulating heat until sufficient heat is absorbed to push the refrigerant into the vapor state. Any further heat that is absorbed causes the vapor to become superheated, raising its temperature

above the saturation temperature. Conventional mechanical expansion valves route the evaporator inlet and outlet lines through the valve to measure the temperature of the refrigerant at the inlet and outlet, and to control the flow at the inlet. The inlet temperature provides the saturation temperature at the system low side pressure. The temperature of the refrigerant at the outlet is used as the controlled input. The expansion valve is dynamically controlled such that the evaporator outlet temperature is a predetermined number of degrees hotter than the outlet saturation temperature. This ensures that the refrigerant has changed to the vapor state and become superheated, thereby eliminating the risk of flooding the compressor. Routing the evaporator inlet and outlet lines through the expansion valve requires one of those lines to doubleback from its normal routing, thereby increasing the complexity of the plumbing required for the HVAC system. Also, sensing temperature provides a much slower responding system than sensing pressure. Therefore, using a temperature probe to directly sense the saturation temperature of the refrigerant results in sluggish system response to changes in the compressor suction pressure. In conventional systems using a compressor that is cycled on and off the slow response delays the system start-up but has only a minimal effect during steady-state operation. With electric compressors that are controllable over a wide range of suction pressures the slow expansion valve response impacts steady-state response as well as start-up.

Generally, the compressor in internal combustion vehicle HVAC systems is cycled on and off, therefore to control the air temperature blown into the passenger compartment the compressor is cycled on and off at a rate that provides air from the evaporator that is slightly cooler than requested. A PTC heater located downstream from the evaporator heats the air to the requested temperature. With the introduction of electric compressors to automotive systems the air is still generally cooled to a temperature that is slightly cooler than requested, then heated with a downstream PTC heater. The temperature of the air blown into the passenger compartment is sensed by a thermister and compared to a desired temperature that is inputted by the vehicle passenger. The error between the desired temperature and the measured temperature is used to vary the speed of the compressor. Attempting to control the passenger compartment temperature directly results in a sluggish system response wherein there is an excessive delay before the desired steady-state temperature is attained or the system does not settle out to a stable temperature, but instead oscillates about the desired temperature; first supplying air that is too hot, then supplying air that is too cold.

The present invention provides an improved means of controlling an HVAC system by using suction pressure as an indirect measure of the air temperature flowing out of an evaporator. By controlling suction pressure, faster system response to changes in the desired temperature or system operating conditions is attained. A faster responding system provides the vehicle passengers with appropriately cooled air at a stable temperature in less time than conventional systems. Passenger comfort is enhanced by minimizing the time they have to endure sitting in sweltering heat before the air from the air conditioner is sufficient to cool them.

One object of the present invention is to provide a system for improving the steady-state response time of an automotive HVAC system.

Another object of the present invention is to decrease the start-up time of an automotive air conditioning system.

It is an additional object of the present invention to provide a system for controlling an HVAC system that employs a flow management device.

A further object of the present invention is to provide a system for controlling an HVAC system incorporating a centralized flow management center.

Accordingly, the invention provides a control system for controlling a reversible HVAC system of a motor vehicle. The HVAC system includes an electric compressor for circulating a refrigerant through a heat pump. The speed of the compressor is controlled by a compressor control signal having a variable duty cycle. Inside and outside heat exchangers transfer heat energy between an outside environment and a passenger compartment of the motor vehicle. A refrigerant flow switching device switches the direction of refrigerant flow towards the inside heat exchanger in a heating mode and towards the outside heat exchanger in a cooling mode. A pressure reducing assembly supplies pressure reduced refrigerant to the inside heat exchanger in the cooling mode and to the outside heat exchanger in the heating mode. The pressure reducing assembly includes an electronic expansion valve in which the flow rate is set by an EXV control signal having a variable duty cycle. A controller controls the duty cycle setting of the compressor control signal and the EXV control signal such that a desired quantity of heat is transferred between the outside environment and the passenger compartment.

The above described device is only an example. Devices in accordance with the present invention may be implemented in a variety of ways.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects of the present invention will become apparent to those skilled in the art from the following detailed description in conjunction with the attached drawings in which:

FIG. 1 is a schematic representation of a preferred embodiment of the automotive refrigerant circuit;

FIG. 2 is a cross-sectional view of the flow management center shown in FIG. 1;

FIGS. 3a and 3b present cross-sectional views of flow management devices embodying the present invention;

FIG. 4 is a schematic representation of an alternative automotive refrigerant circuit;

FIG. 5 is a block diagram illustration of the control circuit interconnection to a reversible HVAC refrigerant circuit;

FIG. 6 is a flow diagram showing an overview of the control program for the preferred embodiment of the invention;

FIG. 7 is a flow diagram illustration of the expansion valve control program for the preferred embodiment of the invention;

FIG. 8 is a flow diagram of the compressor speed control module for the preferred embodiment of the invention;

FIG. 9 is a diagram illustrating the interaction between the expansion valve and compressor during the turn-on transition;

FIG. 10 is a datagram illustrating the relationship between the temperature cycle and a schematic representation of an HVAC system;

FIG. 11 is a flow diagram of the anti-fog algorithm for the preferred embodiment of the invention;

FIG. 12 is a flow diagram of the heating mode selection module for the preferred embodiment of the invention;

FIG. 13 is a flow diagram of the air-handling method for the preferred embodiment of the invention;

FIG. 14 is a schematic representation of a preferred embodiment of an HVAC system coupled to a battery pack module;

FIG. 15 is datagram illustrating the relationship between a preferred embodiment of the HVAC system and its heat load cycle; and

FIG. 16 is a datagram illustrating the relationship between the temperature lever position and the corresponding operating mode.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

FIG. 1 illustrates an exemplary reversible HVAC system 50 for motor vehicles that includes an air-flow structure 52, a refrigerant flow system 54, and a front panel 55 for providing controlling inputs. The reversible HVAC system 50 can both heat and cool the passenger compartment air of a motor vehicle by using the refrigerant flow system 54 in conjunction with the air-flow structure 52 to transfer heat energy between the outside environment and the passenger compartment. In heating mode, heat energy is transferred from the outside environment to air that flows into the passenger compartment and in cooling mode, heat energy is transferred to the outside environment from air that flows into the passenger compartment. The refrigerant flow system 54 acts as a storage medium for heat energy that is being transferred between the outside environment and the passenger compartment. The air-flow structure 52 controls the flow of conditioned air into the passenger compartment. An inside heat exchanger 88 provides an interface between the refrigerant flow system 54 and the air-flow structure permitting the transfer of heat energy between the refrigerant and the air flowing into the passenger compartment. The front panel 55 provides a means for the passengers to control the temperature, flow rate, and operating mode of the HVAC system.

The air-flow structure 52 includes a duct 56 through which air is supplied into the passenger compartment, a blower 58 for introducing air into the duct 56, a recirculation door 60 for controlling the proportion of fresh air to recirculated air, a PTC heater 62 for heating the air, a blend door 60 for controlling the proportion of air that flows over the PTC heater 62, and a set of duct outlets for discharging air into the passenger compartment.

The duct outlets include a defrost outlet 64 for directing air towards the windshield of the vehicle, a panel outlet 66 for directing air towards the upper extremities of the passengers, and a floor outlet 68 for discharging air towards the lower extremities of the passengers. The duct outlets 64–68 are selectively opened and closed by a mode damper 70 which operates in accordance with the position of the mode selector switch 72 located on front panel 55.

The refrigerant flow system 54 is operable in a heating mode and a cooling mode and includes a compressor 76, a four-way switch 78 for controlling the direction of refrigerant flow, an inside heat exchanger 88 for transferring energy between the refrigerant and air flowing into the passenger compartment, an outside heat exchanger 80 for interfacing with the outside environment, a flow management center 82 for reducing the pressure of refrigerant flowing into a heat exchanger that is functioning as an evaporator, shut-off valves 84 and 86 for system protection, zone-control heat exchanger 92 for providing independently controlled cooling to a local region, and pressure reducing device 90 for reducing the pressure of refrigerant flowing into the zone-control heat exchanger 92. The refrigerant flow system 54 interacts with the air-flow structure 52 and the passenger compartment through the operation of the inside heat exchanger 88 during the heating and cooling modes.

The function of the inside heat exchanger 88 changes in each operating mode; during heating mode the inside heat exchanger 88 functions as a condenser transferring heat energy to air that passes through air-flow structure 52 into the passenger compartment and during cooling mode the inside heat exchanger 88 functions as an evaporator absorbing heat energy from the air that passes through air-flow structure 52 into the passenger compartment.

The compressor 76 is driven by a variable speed electric motor (not shown). Varying the speed of the electric motor causes a commensurate change in the suction pressure and refrigerant discharge capacity of compressor 76. Although the compressor in the present embodiment is a variable speed compressor, it is within the scope of the invention to employ a single speed compressor. The four-way switch 78 is connected between the compressor 76 and the heat exchangers 80 and 88 to provide a method of changing from air conditioning mode to heat pump mode by reversing the direction of refrigerant flow.

The inside heat exchanger 88 functions as an evaporator during a cooling operation and as a condenser during a heating operation. Inside heat exchanger 88 is arranged within duct 56 so that the air blown through the exchanger 88 is conditioned prior to passing over PTC heater 62 and being discharged through the duct outlets. Shut-off valve 84 provides a means of interrupting refrigerant flow during HVAC operating modes that do not require operation of inside heat exchanger 88. Examples of such operating modes include disabling operation of the inside heat exchanger 88 as an evaporator at low ambient temperatures that could result in freezing of the heat exchanger 88 due to condensation, and modes where only secondary heat exchangers are operational such as zone control heat exchanger 92. Such operating modes include cooling of a battery assembly and cooling of pre-selected regions within the vehicle. The flow management center 82 reduces the pressure of and expands the refrigerant to be supplied to the inside heat exchanger 88 during a cooling operation.

The outside heat exchanger 80, which is generally located towards the front of the vehicle, exchanges heat between the outside air and the refrigerant. A fan 94 ensures a constant supply of outside air flows through outside heat exchanger 80. During air conditioning mode the outside heat exchanger 80 functions as a condenser providing a means for the refrigerant to shed heat to the outside air. During heat pump mode the outside heat exchanger 80 functions as an evaporator absorbing heat energy from the outside air into the refrigerant.

The flow management center 82 provides a centralized device for reducing the pressure of refrigerant flowing into a heat exchanger 80 or 88 functioning as an evaporator and acts as a source of high pressure liquid refrigerant for secondary heat exchangers. Conventional circuits use a separate pressure reducing device with bypass plumbing for each heat exchanger that functions as an evaporator. By using a single flow management center 82 to provide pressure reduced refrigerant the complexity of the refrigerant flow system 54 is greatly reduced. Additionally, a receiver/drier function is integrated into the flow management center 82 for eliminating contaminants and providing a reservoir of pressurized liquid refrigerant. Refrigerant tapped from the receiver portion is routed to pressure reducing device 90 and then to zone-control heat exchanger 92. Although the flow management center in the preferred embodiment includes a receiver/drier function the principles of the invention can be extended to flow management devices that do not include a receiver/drier function.

Flow management center **82** is illustrated in greater detail in FIG. 2 to include a housing **100** defining bi-directional ports **102** and **104**, a pressure sensitive valve **106**, check valves **108** and **110**, desiccant **112**, a uni-directional flow member **114**, pressure reducing valve **116**, outlets **118** and **120**, temperature probe **124**, and pressure probe **122**. Pressurized liquid refrigerant flows into bi-directional port **102** or **104**, through the corresponding check valve **108** or **110**, through the desiccant **112**, into reservoir **113**, up the uni-directional flow member **114**, through pressure reducing device **116** and pressure sensitive valve **106**, and finally reduced pressure refrigerant flows out of the other bi-directional port **104** or **102**. When the HVAC system **50** changes operating modes the direction of refrigerant flow reverses as high pressure refrigerant flows into the bi-directional port that pressure reduced refrigerant was flowing from. The refrigerant then flows through the corresponding check valve **110** or **108**, through the desiccant **112**, into reservoir **113**, up the unidirectional flow member **114**, through pressure reducing device **116** and pressure sensitive valve **106**, and finally reduced pressure refrigerant flows out of the other bi-directional port **102** or **104**. The pressure sensitive valve **106** permits the flow of pressure reduced refrigerant out of one bi-directional port while preventing high pressure refrigerant from flowing directly between the bi-directional ports. When high pressure refrigerant flows into a bi-directional port **102** and **104** the pressure sensitive valve **106** closes the flow path from the port to the pressure reducing device **116** and opens a path from the pressure reducing device to the other bi-directional port **104** and **102**. Closing the flow path from the bi-directional port **102** or **104** to the pressure reducing device forces refrigerant to flow through the corresponding check valve **108** or **110**, through the desiccant **112**, and into reservoir **113**. The opposing check valve **110** or **108** prevents high pressure liquid refrigerant in reservoir **113** from flowing out the opposing bi-directional port **104** or **102**. Impurities within the refrigerant are removed by desiccant **112**. Reservoir **113** provides a pool of high pressure liquid refrigerant that can be sourced to multiple pressure reducing devices such as device **116** within the flow management center **82** as well as pressure reducing devices that provide reduced pressure refrigerant to secondary heat exchangers. Outlets **118** and **120** provide a means of tapping off refrigerant from reservoir **113** and directing it to secondary heat exchanger circuits. In the preferred embodiment the pressure sensitive valve **106** is a dual poppet valve, however it is envisioned that other valves such as multiple check valves, mushroom valves, reed valves, or rotary valves may be employed. Additionally, similar valves as listed above can replace check valves **108** and **110**. Although the pressure reducing device **116** in the preferred embodiment is an electronically controlled expansion valve it is within the scope of the invention to use mechanically controlled expansion valves as well as 90° valves. The desiccant **112** and the temperature and pressure probes **122** and **124** are merely exemplary of additional functions that can be added to the flow management center, they are not required to practice the invention.

Returning to FIG. 1, the zone-control heat exchanger **92**, located within the interior of the vehicle provides cooling functions for local zones or assemblies. Examples of local zone cooling include battery assembly cooling, air conditioned seats, and individualized cooling of one side of the passenger compartment. Pressure reducing device **90** reduces the pressure of and expands the refrigerant to be supplied to zone control heat exchanger **92**. The expanded refrigerant absorbs heat from the air or liquid which is passed through heat exchanger **92**, thereby cooling the air or liquid.

The front panel **55** includes selector switches for setting the operating parameters of the air conditioning circuit **50**. The switches include a blower speed selector **73** that in the preferred embodiment is adjustable from 30% to 100% of the maximum blower speed, a mode selector switch **72** having five mode settings, a recirculation selector **75** for selecting fresh or recirculated air, and a sliding temperature lever **74** for setting the temperature of air discharged from the duct outlets. Although the mode selector switch in the preferred embodiment has five discrete settings, the principles of the invention can be extended to a mode selector having an unlimited number of settings.

During cooling mode, the refrigerant discharged from the compressor **76** flows through four-way switch **78** into outside heat exchanger **80** which functions as a condenser. As heat energy stored in the refrigerant is shed to the outside air which is blown through the exchanger **80** the refrigerant condenses to a high pressure liquid. The liquid refrigerant flows into a bi-directional port **102** of the flow management center **82**, through the desiccant **112**, into the reservoir **113**, up the unidirectional flow member **114**, through the pressure reducing valve **116**, and then out the other bi-directional port **104**. A portion of the refrigerant is tapped off from the reservoir **113** and directed towards a secondary loop as shown in FIG. 1 will be explained in a later paragraph. The refrigerant flowing through the pressure reducing valve **116** is pressure reduced and then passes through the other bi-directional port **104**. The pressure reduced refrigerant flows into the inside heat exchanger **88** which functions as an evaporator. Heat energy from air passing through inside heat exchanger **88** is absorbed by the pressure reduced refrigerant causing the refrigerant to change to the vapor state. The vapor state refrigerant flows from the heat exchanger **88** through the four-way switch **78** and back to the inlet of compressor **76** which compresses the vapor and directs it through four-way switch **78** to outside heat exchanger **80**.

The operation of the secondary loop during cooling mode is as follows. The portion of refrigerant that flowed from an outlet in reservoir **113** flows through shut-off valve **86** into pressure reducing device **90**. Pressure reduced refrigerant flows out of device **90** into local-zone heat exchanger **92** which functions as an evaporator. The refrigerant absorbs heat from the air which passes through it thereby providing separately controlled cooling for a portion of the passenger compartment. Although the zone control heat exchanger **92** in the preferred embodiment functions as an air-to-refrigerant evaporator, it is within the scope of the invention to employ other heat exchangers such as refrigerant-to-refrigerant, water-to-refrigerant, and oil-to-refrigerant heat exchangers.

During heating mode, the direction of refrigerant flow is reversed by changing the orientation of four-way switch **78**. A signal from a controller **130**, hereinafter described, controls the orientation of four-way switch **78**. The refrigerant discharged from the compressor **76** flows through four-way switch **78** into inside heat exchanger **88** which functions as a condenser. As heat energy stored in the refrigerant is shed to the inside air which is blown through the exchanger **88** the refrigerant condenses to a high pressure liquid. The liquid refrigerant flows into the bi-directional port **104** of the flow management center **82**, through the desiccant **112**, into the reservoir **113**, up the uni-directional flow member **114**, through the pressure reducing valve **116**, and then out the other bi-directional port **102**. The refrigerant flowing through the pressure reducing valve **116** is pressure reduced and then passes through bi-directional port **102**. The pres-

sure reduced refrigerant flows into the outside heat exchanger **80** which functions as an evaporator. Heat energy from air passing through outside heat exchanger **80** is absorbed by the pressure reduced refrigerant causing the refrigerant to change to the vapor state. The vapor state refrigerant flows from the heat exchanger **80** through the four-way switch **78** and back to the inlet of compressor **76** which compresses the vapor and directs it back through four-way switch **78** to inside heat exchanger **88**.

During heating mode, the secondary loop operates in the same manner as during a cooling mode. Refrigerant from outlet **118** of flow management center **82** flows through pressure reducing device **90** and into local-zone heat exchanger **92** in which it absorbs heat from air that is passing through the exchanger **92**. Pressure reducing device **90** pressure reduces the refrigerant to increase its capacity to absorb heat energy from air or fluid flowing through the heat exchanger **92**.

Employing flow management center **82** in reversible HVAC system **50** greatly simplifies the interconnecting plumbing and permits more reliable implementation of secondary cooling loops. It is possible to alternately heat and cool a vehicle with two heat exchangers without the additional valves and plumbing required for conventional systems. Complex refrigerant balancing schemes for dividing refrigerant amongst multiple heat exchanger loops are not required, thereby improving system performance, increasing system reliability, and reducing cost. A common sense point at the outlet of pressure reducing device **116** is provided for pressure reduced (low-side) refrigerant. Sensing temperature and pressure at the flow management center eliminates the need of conventional systems for sensing at the inlet to each heat exchanger.

Referring to FIGS. **3a** and **3b**, an alternate flow management device **81** is illustrated which does not include the receiver/drier function, but provides reversibility with simpler plumbing than conventional systems and a single pressure reducing device. The flow management device includes a housing **100** defining bi-directional ports **102** and **104**, a pressure sensitive valve **106**, check valves **108** and **110**, a uni-directional flow member **114**, temperature probe **122**, and pressure probe **124**. The flow management device **81** includes all the capabilities of the flow management center **82** with the exception of the receiver/drier function.

FIG. **4** illustrates another embodiment of an automotive air conditioning circuit **40** that includes a compressor **41**, an outside heat exchanger **42**, an inside heat exchanger **43**, two four-way switches **44** and **45**, a receiver/drier **46**, and an electronic expansion valve **47**.

Four-way switch **45**, receiver/drier **46**, and expansion valve **47** functionally replace the flow management center **82** that is employed in circuit **50** (see FIG. **1**). The function of four-way valve **45** is the mirror image of the function of four-way valve **44**. Valve **44** is employed to reverse the flow of refrigerant through the heat exchangers **42** and **43**. It essentially converts uni-directional refrigerant flow from the compressor **41** into bi-directional refrigerant flow into the heat exchangers **42** and **43**. Whereas four-way valve **45** converts bi-directional refrigerant flow from the heat exchangers **42** and **43** into a uni-directional flow through receiver/drier **46** and expansion valve **47**.

Receiver/drier **46** removes contaminants from the refrigerant and ensures a continuous flow of high pressure liquid refrigerant into expansion valve **47**. Expansion valve **47** provides refrigerant pressure reduction and expansion for heat exchangers **42** and **43**. Expansion valve **47** is preferably

an electronic expansion valve that receives its controlling inputs from a controller that monitors the saturation and superheat temperature of the heat exchangers **42** and **43**. However, other pressure reducing devices such as block valves, 90° valves, and thermal expansion valves (TXV) are within the scope of the invention. Generally, to control a TXV, refrigerant at the superheat temperature and the saturation temperature must be routed to the device. To obtain the superheat temperature the refrigerant from four-way valve **44** to the compressor **41** inlet can be routed through the TXV. For the saturation temperature the refrigerant emitted from the TXV can be sensed.

During cooling mode outside heat exchanger **42** functions as a condenser shedding heat to the outside environment and inside heat exchanger **43** functions as an evaporator absorbing heat from air that is blown into the passenger compartment. The refrigerant cycle is as follows: refrigerant flows out of compressor **41**, through four-way valve **44**, into the outside heat exchanger **42**, through four-way valve **45**, into receiver/drier **46** and expansion valve **47**, through four-way valve **45**, to inside heat exchanger **43**, through four-way valve **44**, and back to compressor **41**.

During heating mode four-way valve **44** changes orientation causing the flow of refrigerant to heat exchangers **42** and **43** to reverse. With the reversal in the direction of refrigerant flow the functions of the heat exchangers **42** and **43** reverse as inside heat exchanger **43** functions as a condenser and outside heat exchanger **42** functions as an evaporator. In addition, the orientation of four-way valve **45** is also changed to ensure that the direction of refrigerant flowing into receiver/drier **46** and expansion valve **47** remains constant. The refrigerant cycle during heat pump mode is as follows: refrigerant flows out of compressor **41**, through four-way valve **44**, into the inside heat exchanger **43**, through four-way valve **45**, into receiver/drier **46** and expansion valve **47**, through four-way valve **45**, to outside heat exchanger **42**, through four-way valve **44**, and back to compressor **41**.

From the foregoing it will be understood that the invention provides a flow management device with bi-directional ports in which refrigerant flowing into either port passes through an expansion valve and exits the other port. Additionally, the invention can integrate the receiver/drier function into a flow management device with bi-directional ports to provide the capability of tapping off refrigerant flow for secondary cooling circuits. Also, the present invention decreases the complexity of automotive HVAC systems by integrating a flow management device into the system to reduce the number of valves required to implement a reversible heating and cooling HVAC system. A further capability of the invention is to provide a centralized flow management center with taps for refrigerant to reduce the complexity of automotive HVAC systems that implement multi-zone control.

Control System For Reversible Air Conditioning And Heat Pump HVAC System For Electric Vehicles

FIG. **5** illustrates the control system configuration to implement the preferred embodiment of the HVAC circuit **50**. In FIG. **5** the outside coil **80**, flow management center **82**, inside heat exchanger **88**, four-way switch **78**, compressor **76**, duct **56**, and front panel **55** are interconnected in a manner similar to circuit **50** illustrated in FIG. **1**. Additionally illustrated is controller **130** which controls the compressor speed and flow management center **82** operation

based upon inputs from front panel **55**, duct **56**, and the refrigerant system **54**.

During operation of the HVAC circuit **50**, the passenger selects a passenger compartment temperature and operating mode by setting the switches of front panel **55**. The front panel **55** switch settings are decoded by the controller **130**, which converts the settings to values that represent desired temperature, operating mode, and blower speed. The controller **130** also monitors sensors that measure the actual ambient and passenger compartment temperature as well as refrigerant temperature and pressure. The controller **130** compares the decoded settings to the actual ambient and passenger compartment temperature, and generates signals that modify the operation of the refrigerant flow system **54** and air-flow structure **52** to bring the actual passenger compartment temperature in conformance with the desired temperature as represented by the front panel **55** switch settings.

The operation of the refrigerant flow system **54** is modified by controller **130** through output signals that control the orientation of the four-way switch **78**, the speed of compressor **76** and the duty cycle applied to the pressure reducing device **116** within the flow management center **82**. Changing the orientation of four-way switch **78** causes a reversal in the direction of refrigerant flow. The direction that refrigerant flows dictates whether the HVAC system is in the heating mode or the cooling mode by interchanging the functions of the outside heat exchanger **80** and the inside heat exchanger **88**. In heating mode the outside heat exchanger **80** functions as an evaporator and the inside heat exchanger **88** functions as a condenser **88**. Whereas, in cooling mode the outside heat exchanger **80** functions as a condenser and the inside heat exchanger **88** functions as an evaporator. Varying the speed of compressor **76** during a cooling mode or a heating mode causes a change in the refrigerant temperature at the compressor **76** inlet and outlet, which has a direct effect on the temperature of air blown into the passenger compartment. Changing the duty cycle applied to the pressure reducing device **116** during either cooling or heating mode causes a variation in the quantity of refrigerant that the pressure reducing device **116** permits to flow into the heat exchanger **80** or **88** that is functioning as an evaporator. Too much refrigerant flowing through the evaporator leads to flooding the compressor **76**, causing degraded compressor **76** performance. Too little refrigerant flowing through the evaporator limits the efficiency of the evaporator in absorbing heat, resulting in a reduced cooling or heating capacity of the HVAC system **50**. The controller **130** constantly adjusts the duty cycle applied to the pressure reducing device to keep the evaporator operating at maximum efficiency and adjusts the speed of compressor **76** to control the temperature of the air blown into the passenger compartment.

The air-flow structure **52** operation is modified by changing the position of blend door **61** and the position of recirculation door **60**. Changing the position of blend door **61** changes the amount of supplemental electric heating that is applied to the air flowing through the air-flow structure **52**, directly effecting the temperature of the passenger compartment. The position of recirculation door **60** controls whether fresh air from the outside or recirculated air from inside is directed into the passenger compartment. Typically, more energy is required to heat or cool fresh air than recirculated air because of the greater differential between the temperature of the air flowing into the HVAC system **50** and the desired passenger compartment temperature.

Inputs to controller **130** from the front panel **55** include blower speed from blower speed selector **73**, mode selection

from mode selector switch **72**, and the target temperature from temperature lever **74**. The duct **56** inputs include inlet and outlet temperatures from temperature probes **132**, **133**, and **134**. Inputs from the refrigerant system **54** to the controller **130** include temperature probe **135** for sensing ambient temperature, temperature probe **124** for sensing the expansion valve **116** outlet temperature, temperature probe **136** for sensing superheat temperature, and pressure probe **138** for sensing suction pressure.

Controller **130** is preferably a microprocessor-based controller, that includes a processor **140** and associated memory **142**. An analog-to-digital converter (A/D) **144** converts signals from the various sensors to a digital form used by processor **140**. A driver circuit **146** operates the flow management center **82** and compressor **76**. This may be for example an interface circuit that connects to the electric motor for driving the compressor **76** in response to system temperature inputs. The interface circuit may also provide a duty cycle signal for controlling the expansion valve **116** to maintain a regulated average superheat temperature in the compressor suction line. Additionally, the driver **146** may include an interface circuit coupled to four-way switch **78** for reversing the switch from cooling mode to heating mode.

Processor **140** includes a main program **151**, depicted in the flowchart of FIG. **6**, to control the operating mode selection, compressor speed control, and electronic expansion valve (EXV) control. FIG. **6** gives an overview of the control strategy illustrating the major functional modules that are involved.

Referring to FIG. **6**, the main program **151** is illustrated. The main program **151** provides the timing for execution of the various control modules. At step **152** the program enters the operating mode selection module in which the operating mode of the system is selected. The supported operating modes include defrost mode, vent mode, PTC heater mode, heat pump mode, and air conditioning mode. The inputs monitored by the controller **130** to select the HVAC system **50** operating mode include the position of mode selector switch **72**, temperature lever **74**, inlet temperature, and during a heating operation the capacity of heat pump mode. Although the preferred embodiment has five discrete operating modes, the principles of the invention can be extended to systems having either fewer operating modes or a continuously variable set of operating modes.

FIG. **16** illustrates the system operating modes. During the PTC heater/defrost mode, when the ambient temperature is less than 40° F., controller **130** turns on the PTC heater **62** and moves the blend door to a position determined by the location of temperature lever **74**. However, for the first 3% of temperature lever **74** travel from the full cold position the controller turns off PTC heater **62** and only enables the vents.

In the heating mode, with ambient temperatures greater than 40° F. or defrost operation with ambient temperatures between 40° F. and 60° F., controller **130** turns on the heat pump and if necessary the PTC heater with blend door to generate the desired temperature that is reflected by the position of temperature lever **74**. For the first 3% of temperature lever **74** travel from full cold the controller **130** turns off the heat pump and PTC heater **62** and only enables the vents. At temperatures greater than 100° F. the controller **130** turns off PTC heater **62**.

The third operating mode, cooling mode, is selectable for ambient temperatures that are greater than 40° F. Cooling mode is also used for defrost when the ambient temperature is greater than 60° F. For the first 33% of temperature lever

travel the controller **130** varies the compressor suction pressure set point from 20 to 45 psig as the temperature lever **74** is moved from cold to warm. Varying the suction pressure set point causes a direct change in the compressor speed, thereby causing the air temperature at the duct outlets to change. From 33% to 100% of temperature lever travel the controller **130** sets the compressor **76** suction pressure to a constant 30 psig and turns on the PTC heater **62** to reheat the conditioned air.

Returning to FIG. 6, at step **154** the program enters the recirculation door positioning module which is described below with reference to FIG. **13**. The recirculation door positioning module controls the proportion of fresh air to recirculated air that is blown into the passenger compartment. At steps **156** and **158** the program enters modules for monitoring and disabling the compressor in response to detected faults. The compressor speed control module, which is described below with reference to FIG. **8**, is entered at step **160**. Varying the speed of compressor **76** causes a proportional change in the air temperature blown from the duct outlets **64–68**. Step **162** leads to the EXV control module which is described with reference to FIG. **7**. The EXV control module **162** modulates the output of the expansion valve **116** in response to changes in the vapor temperature sensed at the compressor **76** and the compressor suction pressure. Each of the above listed modules will now be further explained.

FIG. **7** illustrates the detailed operation of EXV control module **162**. The module **162** controls the volume of refrigerant that is pressure reduced by the expansion valve **116** to maintain a relatively constant superheat temperature at the outlet of the evaporator. As low-pressure refrigerant flows from the expansion valve **116** through the evaporator it absorbs heat from the air passing through the evaporator. After absorbing sufficient heat the low-pressure refrigerant transitions to a vapor state. Any further heat that is absorbed by the vapor raises the refrigerant temperature above the saturation temperature into a superheated temperature region. To reduce the outlet temperature of the refrigerant the volume of refrigerant flowing into the evaporator is increased, thereby increasing the heat load capacity of the refrigerant. However, if there is too great a volume the refrigerant will not transition to the vapor state, resulting in the compressor **76** being swamped by liquid refrigerant. An insufficient volume of refrigerant flowing into the evaporator results in the refrigerant transitioning to the vapor state before reaching the outlet of the evaporator. Vapor state refrigerant has less capacity to store heat energy than liquid state refrigerant, therefore the portion of the evaporator that contains vapor state refrigerant has less capacity to store heat energy, reducing the efficiency of the evaporator. It is desirable to control the EXV **116** such that the liquid to vapor transition occurs slightly before the outlet of the evaporator causing the refrigerant to superheat a predetermined amount. This maximizes the efficiency of the evaporator by ensuring that virtually the entire coil is used for absorbing heat.

In step **164** the proportional-integral-differential (PID) constants are chosen based upon whether the system is in heating mode or cooling mode. The selection of PID constants is based upon the particular system characteristics and is well known in the art. Following selection of the PID constants the EXV control module proceeds to steps **166** and **168** wherein the expansion valve duty cycle is initialized based upon ambient temperature and operating mode when the system first enters either heat pump mode or air conditioning mode. The graph appended to step **168** depicts the

selection criteria for the duty cycle. Ambient temperature is sensed by temperature probe **135** located in front of the outside heat exchanger **80**. The initial duty cycle is then set to a value ranging from 50% to 100% of the maximum EXV duty cycle depending on the ambient temperature. After setting the initial expansion valve duty cycle the system transitions through a start-up period before settling into steady-state operation.

During steady-state operation the duty cycle of the EXV is varied in order to maintain a constant superheat temperature, 4° F. greater than the saturation temperature, at the inlet to compressor **76**. At step **170** the average superheat temperature is calculated by measuring the vapor temperature of refrigerant exiting the evaporator and subtracting the saturation temperature of the fluid. The saturation temperature is obtained by measuring the compressor inlet suction pressure and using the saturation temperature that corresponds to the suction pressure. Although the present embodiment of the invention calculates the average superheat temperature from the vapor temperature and suction pressure, it is within the scope of the invention to use the vapor temperature with an evaporator inlet temperature including compensating for the evaporator pressure drop. The outlet of the expansion valve **116** located in the flow management center provides a common temperature measurement location for evaporator inlet temperature in either heating mode or cooling mode. In conventional systems that use the evaporator inlet temperature to calculate the superheat temperature; temperature probes are required at the inlets to both the inside and outside heat exchangers to provide inlet temperature in both operating modes.

The updated superheat temperature from step **170** is used at step **172** to calculate a revised setting for the EXV duty cycle. As a final step, at step **174** the controller **130** limits the value of the EXV duty cycle to between 5% and 100% to ensure the device remains within a known operating region.

Referring to FIG. **8**, the compressor speed control module **160** is illustrated. The compressor speed is controlled by applying a variable duty cycle to the electric motor that drives the compressor **76**. The duty cycle is varied in response to a controlling input such as temperature lever position and compressor suction pressure. Varying the speed of compressor **76** causes a proportionate variation in the discharge temperature and discharge pressure of refrigerant flowing out of the compressor **76** as well as an inversely proportional change in the compressor suction pressure and refrigerant suction temperature. The increased refrigerant discharge temperature results in an increased condenser temperature, increasing the capacity of the HVAC system **50** to provide heat during heating mode. The decreased refrigerant suction temperature results in a decreased evaporator temperature, increasing the capacity of the HVAC system **50** to provide cooling during cooling mode. The speed of the compressor **76** is therefore varied to maintain air blown into the passenger compartment at a relatively constant temperature during both heating mode and cooling mode.

The desired temperature is set by adjusting the temperature lever **74** on front panel **55**. The controller **130** calculates the target suction pressure corresponding to the temperature lever position (x/L) which is equal to $20+75*(x/L)$ for a lever travel distance equal to 33% of the available distance. Using the suction pressure as the controlled parameter instead of air temperature provides a more stable and faster responding system.

Conventional systems that use air temperature as the controlled parameter have problems with surging of the

compressor 76 in addition to slow response time. As the sensed outlet air temperature changes due to transient effects including changes in vehicle speed or passing through intermittent sunlight, the compressor speed is changed in an attempt to keep the outlet temperature constant. When the compressor speed is constantly changing the passenger perceives the changes as surging in the propulsion of the vehicle. In the preferred embodiment, the EXV control loop regulates a constant outlet temperature while the compressor regulates a constant suction pressure. As the outlet air temperature changes the heat that is transferred between the refrigerant and the inside heat exchanger varies, causing the refrigerant superheat temperature to change. In response to the change in the superheat temperature the duty cycle of pressure reducing valve 116 is changed by controller 130, causing a shift in the flow of refrigerant, resulting in a slight variation of the compressor suction pressure. The controller 130 then modifies the speed of compressor 76 to bring it in conformance with the target suction pressure. However, the required change in the speed of the compressor 76 is significantly less than the change that would be required in an HVAC system that uses compressor speed alone to compensate for changes in outlet temperature. The minor change in compressor speed is imperceptible to the passengers, leading to enhanced driving comfort.

In addition to eliminating surging, the response time of HVAC system 50 is reduced by using suction pressure as the controlled input. Cooling air at the desired temperature is blown over passengers in significantly less time than conventional systems that control air temperature directly. As a result, unlike conventional systems, PTC heating of the cooled air is not required to provide fine control over the air temperature, resulting in more energy efficient vehicle operation.

During heat mode the compressor speed is varied in reaction to changes in the temperature of the air flowing out of the inside heat exchanger 88. In heat pump mode, unlike air conditioning mode, suction pressure is not directly related to the temperature of air flowing out of the inside heat exchanger. Therefore the air temperature sensed by temperature probe 133 is used as the controlling input for compressor speed.

In step 176 the controller 130 calculates the error and error derivative to be used in the PID controller for the controlled input. In air conditioning mode the controlled input is the suction pressure and in heat pump mode the controlled input is the post inside heat exchanger air temperature measured by temperature probe 133. In step 178 the PID constants corresponding to the appropriate operating mode are selected. Then in step 180 the PID controller calculates the change in compressor duty cycle based on the PID constants and the calculated error and error derivative. The revised duty cycle is limited to between 5% and 90% to ensure the compressor 76 is operated within specified parameters.

FIG. 9 illustrates the interaction between the EXV control loop and the compressor speed control loop during the cooling mode start-up transition. As explained the EXV control loop regulates the volume of refrigerant that flows through pressure reducing device 116 maintaining a predetermined refrigerant superheat temperature at the outlet of the evaporator. A secondary effect of the EXV operation is that as the EXV permits an increased volume of refrigerant to flow, the suction pressure at the inlet to compressor 76 decreases. The operation of the compressor 76 has a corresponding interaction with the EXV. When the speed of compressor 76 is changed, the resulting change in suction

pressure and temperature at the inlet to compressor 76 causes a change in the saturation temperature of refrigerant that flows through the evaporator. Increased compressor 76 speed, causes a lower suction pressure, leading to a lower saturation temperature, resulting in the refrigerant temperature rising to the predetermined superheat temperature earlier in the traverse of the evaporator. The EXV loop compensates for the change in superheat temperature by permitting an increased volume of refrigerant to flow through the evaporator, thereby causing a higher suction pressure. When the HVAC system 50 first turns on, if the pressure reducing valve 116 is set to an initial duty cycle of 0%, the volume of refrigerant flowing through the evaporator will lag the compressor speed throughout the entire start-up time period, delaying the start-up, resulting in a start-up time period of approximately 2.5 minutes.

Assuming an ambient temperature of 40° F., the EXV is set to an initial duty cycle of 50% at step 168 (see FIG. 7). The compressor suction pressure is set to achieve the target suction pressure corresponding to the location of temperature lever 74. Initially, the compressor suction pressure decreases slightly during the first seconds of operation as fluid pours through the EXV, then as the compressor spins up towards steady-state speed suction pressure begins to increase significantly. At the same time the EXV duty cycle increases until the suction pressure has increased to a point where the EXV begins to track the suction pressure. During the early stages of start-up it is not unusual for the compressor to flood until the compressor speed increases a sufficient amount to develop appropriate suction pressure. In the preferred embodiment the compressor is operated on the borderline of flooding during the start-up transition thereby contributing to a faster system response time. Also, as the EXV duty cycle begins to track the suction pressure it will overshoot its steady-state value by a slight amount. The underdamped response displayed by the EXV control loop results in a further reduction in the system response time. In combination the improvements result in air cooled to the desired temperature blowing over the faces of passengers within approximately 35 seconds of system start-up.

From the foregoing it will be understood that the invention provides a system for improving the steady-state response time of an automotive HVAC system. Additionally, the invention permits a reduction in the start-up time of an automotive air conditioning system. Also, the invention provides a system for controlling an HVAC system that employs a flow management device. The invention further provides a system for controlling an HVAC system incorporating a centralized flow management center.

Anti-Fog System for Reversible Air Conditioning and Heat Pump HVAC System for Automobiles

Referring to FIG. 10, a single loop reversible air conditioning and heat pump system 191 is illustrated with the corresponding temperature cycle diagrams for air conditioning mode 190 and heat pump mode 192. As will be described, the preferred embodiment of the present invention prevents undesirable fogging by slowly increasing the speed of compressor 76 over a predetermined period of time. Generally, in reversible HVAC systems fogging may occur during the transition from cooling mode to heating mode. Prior to describing the solution provided by the presently preferred embodiment, a brief description of the refrigeration cycle and how fogging occurs in a reversible system is provided with reference to FIG. 10.

The refrigeration cycle essentially uses a small amount of energy to power a compressor in order to transfer a greater

amount of heat energy from one environmental region to another environmental region. It does this by using the cooling effect of evaporation to lower the temperature of the air passing through one heat exchanger (the evaporator) **88** and using the heating effect of condensing high temperature, high pressure gas to raise the temperature of the air passing through another heat exchanger (the condenser) **80**. With reference to waveform t_1 of FIG. **10**, drawn from right to left, the temperature profile of refrigerant flowing from an evaporator **88**, through a compressor **76** and four-way switch **78**, and then through a condenser **80** is illustrated. Refrigerant entering the evaporator **88** is at low pressure and low temperature. The temperature being the saturation temperature of the pressure reduced refrigerant. As the refrigerant passes through the evaporator **88** heat energy from air that is blown through the evaporator **88** is absorbed by the refrigerant. The air that exits the evaporator **88** is noticeably cooled due to the transfer of heat energy from the air to the refrigerant. The cooler air no longer has the capacity to retain the same amount of moisture as the warmer air that was blown into the evaporator **88**, therefore the excess moisture condenses out of the air onto the external surface of the evaporator **88**. The vapor state refrigerant flows from the evaporator **88** to the compressor **76** where it is compressed to a high pressure, high temperature vapor before flowing into the condenser **80**.

When the controller **130** commands a change to heating mode the orientation of four-way switch **78** is changed, thus interchanging the refrigerant connections to the compressor **76**, thereby reversing the flow of refrigerant through the system causing the heat exchangers to change functions. Referring to waveform t_2 of FIG. **10**, drawn from left to right, pressure reduced refrigerant flowing into outside heat exchanger **80** (the evaporator) absorbs heat energy from the outside air which is blown through the evaporator **80**. The refrigerant flowing through the evaporator remains at its saturation temperature for a majority of the traverse. As the refrigerant nears the end of the evaporator **80** the accumulated heat energy that has been absorbed causes the refrigerant to transition to a vapor state. Any further heat energy that is absorbed in the refrigerant causes the refrigerant temperature to increase beyond the saturation temperature into a superheated temperature range. The superheated refrigerant flows to the compressor **76** which compresses it to a high pressure, high temperature vapor which is directed to the inside heat exchanger (the condenser) **88**. As the high temperature vapor flows into the condenser **88**, the temperature of the condenser **88** rapidly rises to an equivalent temperature. Moisture that had accumulated on the inside coil **88** during the air conditioning mode begins to boil off as the condenser **88** increases in temperature. The moisture is absorbed by air flowing through condenser **88** into the passenger compartment. Fogging then occurs when the moisture laden air strikes the cold inside surface of the passenger compartment windows.

FIGS. **5** and **11** illustrate an exemplary anti-fogging system for controlling the operation of a reversible HVAC system **50** for automobiles. FIG. **5** as explained earlier in this specification illustrates a control system for an automotive HVAC system. Using the same hardware configuration, controller **130** minimizes the effects of fogging by gradually increasing the compressor speed at a predetermined rate and regulating the flow management center operation to ensure efficient use of the evaporator. Although a flow management center **82** is employed in the preferred embodiment it is within the scope of the invention to use a pressure reducing device with a separate receiver/drier. Additionally, the

invention encompasses any variable speed or capacity compressor, even though the compressor in the preferred embodiment is an electric compressor.

Processor **140** is programmed to control the compressor speed and flow management center operation as depicted in the flowchart of FIG. **11**. FIG. **11** provides a general overview of the main system operating modes and the detailed program steps related to the anti-fogging routine. In the preferred embodiment of the invention the steps that are included in the anti-fogging routine **201** are spread throughout a number of program modules such as the operating mode selection **152**, compressor speed control **160**, and EXV control **162** (see FIG. **6**). Calculated changes to the outputs that control the speed of compressor **76** and the regulation of pressure reducing device **116** only occur within the designated modules. To clarify the included steps, they have been brought together and listed in anti-fog routine **201**.

At step **200** the program enters air conditioning mode in which cooling air is blown into the passenger compartment. During air conditioning mode, as a byproduct of the refrigeration process moisture accumulates on the external surface of inside heat exchanger **88**. At step **202** an anti-fog flag is set to provide an indication that there is moisture on the surface of the inside heat exchanger **88**. The anti-fog flag will remain set until heat pump mode is entered at step **204**. At step **206** the program continues into the anti-fog sequence **208** if the anti-fog flag is set, otherwise it branches off to steady-state heat pump mode at step **210**.

The anti-fog sequence begins with selecting a post-inside heat exchanger air target temperature and a duration of operation at step **212** from a table of values that are represented in the graph. The actual post-inside heat exchanger air temperature is measured by probe **133**. The target temperature is set equal to the ambient plus an offset that is increased over time. Limiting the post-inside heat exchanger target temperature to a specified offset above ambient indirectly limits the temperature of the compressed refrigerant vapor that flows into the condenser **88**. The evaporation rate of moisture located on the inside heat exchanger **88** is directly related to the refrigerant temperature at the inlet to condenser **88**. Therefore, gradually increasing the target temperature causes a gradual increase in the compressor speed, which causes a gradual increase in the compressor discharge pressure, which results in a gradual increase in the refrigerant temperature at the inlet to the condenser, thereby limiting the evaporation rate of moisture on the condenser **88**.

At step **214** the compressor target suction pressure is set to 45 psi. Starting the suction pressure at 45 psi ensures that the starting discharge pressure and temperature are low enough to prevent uncontrolled moisture evaporation from the condenser **88**. The suction pressure is related directly to the speed of compressor **76**.

At step **216** a PID controller calculates the new compressor speed setting based upon the target temperature and previous suction pressure. The change in suction pressure from the previous setting is limited to prevent undesirable changes in compressor speed which could lead to high discharge temperatures and uncontrolled condenser moisture evaporation. Although the preferred embodiment of the invention controls the compressor speed to regulate the moisture evaporation rate, it is within the scope of the invention to control other system parameters such as suction pressure, discharge pressure, or condenser inlet temperature.

If the post-inside heat exchanger target temperature is less than the target temperature that correlates to the temperature

lever **74** position, then the PTC heater **62** is turned on and the blend door **61** is set to a position that will enable the HVAC to achieve the temperature lever target temperature. The required door **61** position is obtained from a lookup table that correlates blend door position to differential temperature and airflow.

At step **218** the recirculation door **60** is set to the full fresh air position. Setting the recirculation door **60** to the full fresh air position in combination with slowly evaporating moisture from the condenser prevents fogging in the passenger compartment. As moisture is slowly evaporated off of the condenser it is absorbed by the fresh air flowing past the recirculation door **60**, through inside heat exchanger **88**, and into the passenger compartment. The moisture laden air flowing into the passenger compartment from the outside causes the internal air pressure to increase, acting to drive air out of the compartment through vents and other unsealed openings. Pushing air out the vents prevents an excessive amount of moisture laden air from accumulating in the passenger compartment as well as ensuring that the driest possible air is passed over the inside heat exchanger **88**.

The anti-fog sequence continues until controller **130** has executed the table of values depicted graphically at step **212**. Having completed the predetermined routine, all of the moisture that existed on inside heat exchanger **88** has evaporated and therefore the temperature of the refrigerant entering the condenser **88** no longer needs to be controlled. The anti-fog flag is reset and the heat pump system transitions to normal steady-state heat pump mode in which the speed of the compressor **76** is controlled such that a desired duct outlet temperature as selected with temperature lever **74** is attained.

From the foregoing it will be understood that the invention provides a system which controls fogging when changing modes in a reversible HVAC system. Additionally, through the use of the anti-fogging method the rate of initial heating of the passenger compartment is not compromised. Additionally, the invention permits a system which controls fogging in an HVAC system when initially starting air conditioning mode.

Heating System in a Reversible Air Conditioning and Heat Pump HVAC System for Electric Vehicles

FIGS. **5** and **12** illustrate an exemplary temperature control system for a reversible air conditioning and heat pump HVAC system for an electric automobile. FIG. **5** illustrates the interconnection of controller **130** to an automotive air conditioning circuit **50**. Controller **130** controls the compressor speed, flow management center **82** operation, and blend door **61** positioning based upon inputs from front panel **55**, duct **56**, and the refrigerant system. The controller **130** is preferably a microprocessor-based circuit, that includes processor **140** for executing a program, its associated memory **142**, an A/D **144** for converting analog signals into digital inputs, and a driver circuit **146** for interfacing with system components.

Processor **140** is programmed to control the heating mode selection that is depicted in the flowcharts of FIGS. **12A** and **12B**. The heating mode selection programs control the operation of the HVAC circuit **50** during a heating operation. In the preferred embodiment of the invention the steps that are included in the heating mode selection modules are spread throughout a number of program modules such as the operating mode selection **152**, compressor speed control **160**, and EXV control **162** (see FIG. **6**). Calculated changes to the outputs that control the speed of compressor **76** and

the regulation of pressure reducing device **116** only occur within the designated modules. To clarify the included steps, they have been brought together and listed in the two heating mode selection modules.

Heat to the passenger compartment is provided by a combination of the HVAC in heat pump mode and PTC heaters **62** depending on the ambient temperature and the requested target temperature as selected by the position of the temperature lever **74**.

For ambient temperatures less than 40° F. heat is supplied only by the PTC heater as the reversible HVAC refrigerant system is disabled to prevent icing of the heat exchangers **80** and **88** which would result in reduced airflow and odors in the passenger compartment. At ambient temperatures greater than or equal to 40° F. heat is supplied by either the heat pump, the PTC heater **62**, or the heat pump supplemented by the PTC heater **62**.

Referring to FIG. **12A**, at step **270** a target temperature is calculated based upon the position of temperature lever **74**. A lookup table contains values that correlate temperature lever position to the target temperature of the air flowing from the duct outlets **64–68**. The creation of a lookup table containing such values is well known in the art. At step **272** the target temperature is then compared to the temperature of air flowing into inside heat exchanger **88**. The pre-indoor heat exchanger air temperature is measured by probe **132**. If the air temperature at probe **132** exceeds the target temperature the PTC heater **62** is turned off, the heat pump is turned off, and the blend door **61** is set to the max cool position. In the max cool position air bypasses the PTC heater and flows directly to the duct outlets. During this mode of operation the outside air which flows into the duct **56** is warmer than the passenger has requested via the temperature lever **74**. To cool the incoming air to the desired temperature the passenger has the option of enabling air conditioning mode.

For incoming air that is colder than the target temperature the compressor speed is adjusted by a PID controller at step **276** to drive the temperature of post inside heat exchanger air to the target temperature. As compressor speed is increased the refrigerant suction pressure and temperature decreases enabling the refrigerant to absorb a greater amount of heat from the external air as the refrigerant traverses the outside heat exchanger (evaporator) **80**. The refrigerant is additionally compressed by the compressor to a greater discharge temperature and pressure prior to being routed to the inside heat exchanger (condenser) **88**. The increased heat load of the refrigerant, obtained from the outside heat exchanger **80**, is then transferred to the air flowing through the inside heat exchanger **88**. The increased heat transfer causes a commensurate increase in the post inside heat exchanger air temperature, assuming the ambient temperature and air flow rate remains constant.

At step **278** the post inside heat exchanger air temperature is measured by probe **133** and compared to the target temperature. The post inside heat exchanger air temperature represents the air temperature prior to the PTC heater. If the air temperature is greater than the target temperature, then supplemental heat is not required to achieve the target temperature. Therefore, at step **280** the controller turns PTC heater **62** off, sets the blend door **61** to the max cool position, and returns to step **270** to begin another iteration. This is the normal operating loop during heat mode operation as the controller **130** regulates the air temperature to the selected target temperature. The post inside heat exchanger air temperature will exhibit normal closed loop operation by fluctuating slightly about the target temperature.

If the measured post inside heat exchanger air temperature is less than the target temperature, then the electric heater, PTC heater **62**, is turned on. As the air flow rate across the PTC heater **62** increases, the heat output of the device increases thereby transferring a greater amount of heat to the passenger compartment. To regulate the quantity of heat that is transferred to the passenger compartment blend door **61** provides a path for a portion of the air to bypass the PTC heater **62** and recombine downstream with air that has flowed through the PTC heater **62**. By reducing the quantity of air that flows over the PTC heater **62**, less heat is transferred to the air, thereby reducing the commensurate increase in the temperature of the air, and providing a simple means of regulating the temperature of the recombined air.

At step **282** the required blend door position to achieve the target temperature is calculated in a manner known in the art. The required effectiveness represents the amount of PTC heating that is required to raise the temperature of the post inside heat exchanger air to the target temperature at the existing airflow across the PTC. At step **284** the controller **130** sets the position of blend door **61** and the loop returns to step **270** to start another iteration. This is the normal operating loop when supplemental heat from the PTC heater **62** is required to raise the duct outlet air to the requested temperature. Each time through steps **270**, **272**, **276**, **278**, **282**, and **284** the position of the blend door **61** is varied slightly as the controller **130** responds to changing conditions.

Alternatively, the heating mode selection program can be implemented as illustrated in FIG. **12B**. The program illustrated in FIG. **12B** is particularly suitable for operating modes where the overhead energy that is expended turning on the heat pump or PTC heater **62** exceeds the energy required to raise the passenger compartment temperature to the desired temperature. At step **300** a forty second timer is started. The timer sets the time period during which the heat pump attempts to attain the target temperature. At step **302** the heat pump target temperature is calculated based on the position of temperature lever **74**. The compressor speed PID controller is adjusted at step **304** to drive the compressor speed towards attaining the target temperature. At step **306** the heat pump gain is calculated. The heat pump gain represents the work the heat pump contributes to raise the temperature of the passenger compartment under the existing operating conditions. The heat pump gain is set equal to the outlet temperature, probe **133**, minus the inlet temperature, probe **132**, divided by the outlet temperature. At step **308** the post-inside heat exchanger air temperature as measured by probe **133** is compared to the target temperature calculated at step **302** to determine if the heat pump is capable of attaining the target temperature. If the heat pump does attain the target temperature the forty second timer is reset at step **310** and the program returns to step **302**. Additionally, if the heat pump has not attained the target temperature but the 40 second timer has not timed out, the program returns to step **302** to continue to attempt to attain the target temperature. However, if the heat pump does not attain the target temperature within 40 seconds then at step **314** the measured values for heat pump gain and ambient temperature are stored for later use. Although, in the preferred embodiment the heat pump is allowed 40 seconds to attain the target temperature, it is within the scope of the invention that the allowed time may range from about 0 seconds to beyond 40 seconds. For example, the heat pump heating capability may be characterized by factory test or simulation and a number representative of the capability may be stored in memory for later recall to determine if the heat pump is capable of attaining a target temperature.

At step **316** the heating mode transitions from the heat pump to PTC heater **62** by gradually decreasing the heat pump output and increasing the PTC heater **62** over a 40 second period. Making a gradual transition enhances passenger comfort by reducing the noticeability of the change in system operation. At step **318** the stored value for heat pump gain is adjusted for changes in ambient temperature. At step **320** the revised value for heat pump gain is compared to the system gain that represents the amount of work required to heat the passenger compartment to the target temperature. If the system gain exceeds the heat pump gain, there is insufficient capacity in heat pump mode for heating the passenger compartment, therefore the program remains in PTC heat mode and returns to step **318**. If the heat pump gain exceeds the system gain, the heat pump is capable of supplying the required heat necessary to attain the target temperature. The program advances to step **322** and transitions from the PTC heater **62** to heat pump over a 40 second time period, finally returning to heat pump mode at step **300**.

From the foregoing it will be understood that the invention provides a system which minimizes energy consumption during a heating operation of an automotive HVAC system. Additionally, the method can be employed to dynamically update the heating mode selection as operating conditions change. Also, through the use of the method the energy efficiency of an electric vehicle is increased. Additionally, the invention provides an energy efficient method for controlling the passenger compartment temperature of an electric vehicle.

Air Handling for HVAC System for Electric Vehicles

Referring to FIGS. **5** and **13**, an air handling system for an electric vehicle HVAC system is illustrated. FIG. **5** illustrates the interconnection of controller **130** to an automotive air conditioning circuit **50**. Controller **130** controls the compressor speed, flow management center **82** operation, and recirculation door **60** positioning based upon inputs from front panel **55**, duct **56**, and the refrigerant system. Recirculation door **60** may be set to any value from full fresh air, through part fresh air with part recirculated air, to full recirculated air.

The recirculation door control program **251** is illustrated in FIG. **13**. Although FIG. **13** depicts all of the recirculation door program components existing in a single separate program module, it is within the scope of the invention for the different elements to be spread throughout the system program. In the preferred embodiment of the invention the steps that are included in the heating mode selection module are spread throughout a number of program modules such as the operating mode selection **152** and recirc. door positioning **154** modules (see FIG. **6**). To clarify the included steps, they have been brought together and listed in the blend door control module.

When the system is turned-on, step **250** is executed and the recirculation door **60** is set to the recirculation position. By starting in the recirculation position less energy is consumed controlling the temperature of the passenger compartment. In recirculation mode, air from within the passenger compartment is routed through the inside heat exchanger **88** before being directed back into the passenger compartment. Therefore to raise the duct outlet air to the desired temperature the heat transferred from inside heat exchanger **88** only has to supplement the difference between the desired temperature and the temperature of the passenger compartment. In fresh air mode, to raise the duct outlet air

to the desired temperature the heat transferred from inside heat exchanger **88** supplements the difference between the desired temperature and the temperature of the external air which is flowing into the passenger compartment.

Having set the recirculation door **60** to its initial position the program continues on to step **252** in which the inputs from the front panel **55** are interrogated to determine if a particular positioning of the recirculation door has been requested. If a recirculation door position change has been requested, then at step **254** the recirculation door is set to the requested position at step **254**.

In step **256** the program optionally begins an anti-fog sequence. As is explained above, fogging of the passenger compartment windows may occur when the reversible HVAC system **50** switches from cooling mode to heating mode. During the cooling mode cycle moisture accumulates on the external surface of the inside heat exchanger **88** which functions as an evaporator. When the HVAC switches from cooling mode to heating mode the refrigerant flowing into the inside heat exchanger **88**, which functions as a condenser, rapidly increases in temperature. As the refrigerant begins to raise the temperature of the condenser **88**, moisture that had accumulated on the inside heat exchanger **88** during the cooling mode begins to boil off. The evaporating moisture is absorbed by air flowing through condenser **88** into the passenger compartment. Fogging then occurs when the moisture laden air strikes the colder windows of the passenger compartment.

At step **258** the air handling procedure during an anti-fog sequence is performed. The front panel selection for the recirculation door **60** position is overridden as the door **60** is set to the full fresh air position. With fresh air flowing into the passenger compartment the air pressure within the compartment increases, forcing air out of vents and door seal cracks. As new fresh air carrying its load of moisture is blown into the passenger compartment, pre-existing moisture laden air is forced out through the vents to the outside environment. The recirculation door **60** remains in the fresh air position until the anti-fog sequence is completed, at which time the recirculation door is reset to its former position.

In step **260** the program begins an air blow-by sequence. When the vehicle speed exceeds a predetermined value, such as approximately 42 mph, the pressure from air flowing into the fresh air duct **59** flows not only through the blower **58**, but also back up through the recirculation air duct **57**. The air flowing back into the recirculation air duct **57** bypasses the inside heat exchanger **88** and PTC heater **62** which are downstream from the recirculation door **60**. Therefore, the air flowing back into the recirculation duct is unconditioned external air. The external air could vary from extremely cold dry air during winter months to very hot humid air during the summer months. The external air flows out of the duct inlets and directly onto the passengers in the passenger compartment.

At step **262** the program sets the recirculation door **60** to prevent an undesirable air blow-by event from occurring. The previous setting of the recirculation door **60** is overridden and the door is set to the full fresh air setting. The recirculation air duct **57** is blocked when the recirculation door **60** is in the full fresh air position, therefore the fresh air is forced through blower **58**, inside heat exchanger **88**, and PTC heater **62**. The fresh air is properly conditioned to the desired temperature before being blown into the passenger compartment and no air flows back through the recirculation duct **57**. Although in the preferred embodiment the recircu-

lation door is set to the full fresh air setting it could alternately be set to the full recirculation air setting, in which case the fresh air duct **59** is blocked, preventing fresh air from flowing into the duct **56**. Additionally, although in the preferred embodiment the setting of the recirculation door **60** is independent of the prior position of the recirculation door **60**, the selection of the full fresh air setting versus the full recirculation setting could be based on the position of the recirculation door **60** prior to entering the air blow-by sequence.

From the foregoing it will be understood that the invention provides a system for selectively overriding the passenger air mixture selection under predetermined vehicle operating conditions to permit HVAC operating modes that enhance passenger comfort. Additionally, the system can be employed to improve vehicle performance by automatically adjusting the air mix during predetermined vehicle operating modes.

System for Cooling Electric Vehicle Batteries

Referring to FIG. **14**, a schematic of an automotive HVAC circuit **220** for an electric vehicle is illustrated. The HVAC circuit **220** is an alternative embodiment of the invention wherein heat from the battery pack **224** is used to supplement heating of the passenger compartment. The circuit **220** is similar to the HVAC circuit **50** illustrated in FIG. **1** with the addition of a heat exchanger circuit **222** for cooling a battery pack **224**. A heat exchanger circuit **222** communicates with auxiliary heat exchanger **92** to cool battery pack **224** and controller **130**, and includes a heat exchanger **228**, a battery pack **224**, a reservoir **230**, and a pump **232**.

Liquid high pressure refrigerant from flow management center **82** flows through expansion valve **226** and shut-off valve **86** into heat exchanger **228**. Although high pressure refrigerant in the preferred embodiment is obtained from flow management center **82**, it is within the scope of the invention to obtain high pressure refrigerant from other means such as a valve, a receiver/drier, or a reservoir. Additionally, although a thermal expansion valve is employed in the preferred embodiment, the principles of the invention may be readily extended to other pressure reducing means such as an electronic expansion valve. Shut-off valve **86** is included merely to show a possible method of controlling battery cooling by preventing the flow of refrigerant into heat exchanger **228**. The refrigerant outlet of heat exchanger **228** is connected to the compressor **76** suction line such that the vapor is combined with refrigerant vapor from other system evaporators prior to flowing into the compressor **76** inlet.

The coolant outlet of heat exchanger **228** connects to battery pack **224** which includes the vehicle energy storage batteries. Heat is generated in the batteries during energy storage and discharge cycles due to energy losses from converting chemical energy to electrical energy. Heat from the batteries is transferred through the battery pack into the coolant. The outlet of battery pack **224** connects to reservoir **230** which connects to the inlet of pump **232**. The pump **232** propels the coolant through heat exchanger circuit **222**. Coolant from the pump **232** flows through controller **130**, cooling the system electronics. The heat generated by the controller **130** is additionally transferred into the coolant. The controller **130** controls the operation of HVAC system **220**. The temperature of battery pack **224** is sensed by temperature probe **225** which provides an input to the Battery Energy Management System (BEMS) **234**. The BEMS **234** controls the operation of shut-off valve **86** in response to the temperature sensed by probe **225**.

FIG. 15 illustrates the operation of HVAC circuit 220. In this embodiment controller 130 sets four-way valve 78 such that the system heating mode is operational. High pressure, high temperature refrigerant flows from compressor 76 outlet through four-way valve 78 into inside heat exchanger 88 which functions as a condenser. Liquid refrigerant flows from the outlet of condenser 88 through shut-off valve 84 into a bi-directional port of flow management center 82. The refrigerant then splits with a portion flowing from an outlet of flow management center 82 to expansion valve 226, and the remainder of the refrigerant flowing out of the expansion valve 116 of the flow management center 226 to outside heat exchanger 80. Pressure reduced refrigerant flows through the outside heat exchanger 80 which functions as an evaporator absorbing heat energy from the outside air flowing through it.

In operation, the refrigerant that flowed from the outlet of flow management center 82 flows through expansion valve 226 and shut-off valve 86 before entering heat exchanger 228. The pressure reduced refrigerant that flows through heat exchanger 228 absorbs heat energy from coolant that is routed through heat exchanger circuit 222. The process by which heat energy is transferred from the coolant to the refrigerant in heat exchanger 222 is the same as what occurs in inside heat exchanger 88 the functioning of an evaporator described earlier. The coolant in circuit 222 flows through battery pack 224 absorbing heat from the vehicle batteries. The coolant then flows through reservoir 230 and pump 232 before absorbing additional heat from controller 130 prior to returning to heat exchanger 228. Hot coolant enters the heat exchanger 228 inlet and transfers its heat energy to the pressure reduced refrigerant flowing through the refrigerant line within the heat exchanger 228. The pressure reduced refrigerant transitions to the vapor state as it absorbs heat energy from the coolant. The vapor state refrigerant then flows through the four-way switch 78 before combining with vapor state refrigerant from outside heat exchanger 80 prior to the inlet to compressor 76.

Coolant continues to circulate through circuit 222 so long as the temperature of the battery pack 224 remains above 40° F. When the battery pack 224 temperature decreases below 40° F. the BEMS 234 disables shut-off valve 86 interrupting the flow of refrigerant to the heat exchanger 228. Coolant continues to flow through heat exchanger circuit 222 as the temperature of the battery begins to slowly increase. Once the temperature of the battery pack 224 once again rises above 40° F. the BEMS 234 enables shut-off valve 86, reestablishing the flow of refrigerant to the heat exchanger 228 and the transfer of heat from the heat exchanger circuit 224 to the HVAC circuit 220 resumes.

Waveform h_1 of FIG. 15 illustrates the heat cycle of HVAC circuit 220. Refrigerant flowing into evaporator 80 initially carries a heat load depicted as plateau 238. As the refrigerant flows through evaporator 80 it absorbs heat energy from outside air that is blown through the evaporator 80. Meanwhile, refrigerant flowing through heat exchanger 228 also carries a heat load depicted as plateau 238. The refrigerant flowing through heat exchanger 228 absorbs heat energy that is transferred from the battery pack 224 of heat exchanger circuit 222. The heat load of the refrigerant increases to plateau 242 when the vapor state refrigerant from heat exchangers 80 and 228 combines prior to compressor 76. The refrigerant heat load further increases to plateau 244 when compressor 76 compresses the vapor state refrigerant to a high pressure, high temperature vapor. The stored refrigerant heat energy decreases to plateau 238 as the refrigerant traverses the inside heat exchanger 88 and the

heat energy is transferred to air that is blown through into the passenger compartment.

Using waste heat from the battery pack to supplement heat energy absorbed from the outside air for heating the passenger compartment provides a number of advantages. It expands the operating conditions under which heat mode operation of the HVAC is possible by increasing the stored energy in the refrigerant. It improves the efficiency of the overall vehicle system by reducing the need to rely on electric energy to heat the passenger compartment. Where conventional systems would exhaust the battery pack waste heat to the external environment and use electric energy from the batteries to provide supplemental heat to the passenger compartment, the invention reduces the need for electrical heating by using the waste heat from the batteries to supplement the heat pump system.

During cooling mode the flow of the refrigerant through the main loop is reversed from heat pump mode. Heat from air passing through the inside heat exchanger (evaporator) 88 is absorbed by the refrigerant. The refrigerant flowing through local-zone heat exchanger 228 continues to absorb heat from the heat exchanger circuit 222 (refer to FIG. 14). The refrigerant from the local-zone heat exchanger 228 combines with refrigerant from inside heat exchanger 88 prior to compressor 76. The refrigerant is compressed further adding to the heat load and directed to the outside heat exchanger 80 (condenser). As the refrigerant traverses the condenser 80 the combined heat load is shed to the outside air that flows through the condenser 80. The refrigerant then flows to the flow management center 82 and then through the remainder of the circuit.

From the foregoing it will be understood that the invention provides a system for increasing the operating range of an automotive heat pump system. Additionally, the invention provides a system for improving the energy efficiency of an electric automobile. Further, the invention provides a system for efficiently distributing the heat energy of an electric automobile. Also, a method is presented for cooling the battery pack of an electric vehicle.

Advantages of the Invention

From the foregoing it will be understood that the invention provides a flow management device with bi-directional ports in which refrigerant flowing into either port passes through an expansion valve and exits the other port. Additionally, the invention can integrate the receiver/drier function into a flow management device with bi-directional ports to provide the capability of tapping off refrigerant flow for secondary cooling circuits. Also, the present invention decreases the complexity of automotive HVAC systems by integrating a flow management device into the system to reduce the number of valves required to implement a reversible heating and cooling HVAC system. A further capability of the invention is to provide a centralized flow management center with taps for refrigerant to reduce the complexity of automotive HVAC systems that implement multi-zone control.

The invention provides a system for improving the steady-state response time of an automotive HVAC system. Additionally, the invention permits a reduction in the start-up time of an automotive air conditioning system. Also, the invention provides a system for controlling an HVAC system that employs a flow management device. The invention further provides a system for controlling an HVAC system incorporating a centralized flow management center.

The invention provides a system which controls fogging when changing modes in a reversible HVAC system.

Additionally, through the use of the anti-fogging method the rate of initial heating of the passenger compartment is not compromised. Additionally, the invention permits a system which controls fogging in an HVAC system when initially starting air conditioning mode.

The invention provides a system which minimizes energy consumption during a heating operation of an automotive HVAC system. Additionally, the method can be employed to dynamically update the heating mode selection as operating conditions change. Also, through the use of the method the energy efficiency of an electric vehicle is increased. Additionally, the invention provides an energy efficient method for controlling the passenger compartment temperature of an electric vehicle.

The invention provides a system for selectively overriding the passenger air mixture selection under predetermined vehicle operating conditions to permit HVAC operating modes that enhance passenger comfort. Additionally, the system can be employed to improve vehicle performance by automatically adjusting the air mix during predetermined vehicle operating modes.

The invention provides a system for increasing the operating range of an automotive heat pump system. Additionally, the invention provides a system for improving the energy efficiency of an electric automobile. Further, the invention provides a system for efficiently distributing the heat energy of an electric automobile. Also, a method is presented for cooling the battery pack of an electric vehicle.

Although certain preferred embodiments of the invention have been herein described in order to afford an enlightened understanding of the invention, and to describe its principles, it should be understood that the present invention is susceptible to modification, variation, innovation and alteration without departing or deviating from the scope, fair meaning, and basic principles of the subjoined claims.

What is claimed is:

1. A control system for controlling a temperature of a motor vehicle having a passenger compartment, the control system comprising:

a heat pump having an electric compressor for circulating a refrigerant in a direction, said electric compressor having a rotating speed related to a duty cycle of a compressor control signal and a suction pressure related to the rotating speed, first and second heat exchangers for transferring heat energy between an outside environment and the passenger compartment, a refrigerant flow switching device for switching the direction of refrigerant flow towards the first heat exchanger in a heating mode and towards the second heat exchanger in a cooling mode, and a flow management center for supplying pressure reduced refrigerant to the first heat exchanger in the cooling mode and to the second heat exchanger in the heating mode, said flow management center including an electronic expansion valve having a flow rate related to a duty cycle of an EXV control signal;

a controller for controlling the duty cycle of the EXV control signal such that efficient operation of the first and second heat exchangers is maintained and for controlling the duty cycle of the compressor control signal such that a desired quantity of heat is transferred between the outside environment and the passenger compartment;

a first sensor coupled to the controller to sense a refrigerant parameter reflective of an evaporator refrigerant saturation temperature during the heating mode and the cooling mode; and

a second sensor coupled to the controller to sense a refrigerant parameter reflective of an evaporator outlet refrigerant temperature;

wherein the controller calculates a refrigerant superheat temperature based on the evaporator refrigerant saturation temperature and the evaporator outlet refrigerant temperature; said controller controls the duty cycle of the EXV control signal such that the refrigerant superheat temperature is maintained substantially at a predetermined superheat temperature, whereby the evaporator is efficiently used for transferring heat energy.

2. The control system of claim 1 wherein the predetermined superheat temperature is 4° F.

3. The control system of claim 1 wherein the first sensor is coupled to the flow management center for sensing the refrigerant parameter reflective of the evaporator refrigerant saturation temperature.

4. The control system of claim 1 wherein the controller further comprises:

a flow switching control signal coupled to the refrigerant flow switching device for controlling the direction of refrigerant flow.

5. The control system of claim 1 further comprising:

a temperature selector for setting a target temperature for the passenger compartment; and

a third sensor coupled to the controller for sensing the passenger compartment temperature;

wherein the controller regulates the duty cycle of the compressor control signal such that the passenger compartment temperature is maintained substantially equal to the target temperature.

6. A control system for controlling a temperature of a motor vehicle having a passenger compartment, the control system comprising:

a heat pump having an electric compressor for circulating a refrigerant in a direction, said electric compressor having a rotating speed related to a duty cycle of a compressor control signal and a suction pressure related to the rotating speed, first and second heat exchangers for transferring heat energy from an outside environment to the passenger compartment, a refrigerant flow switching device for switching the direction of refrigerant flow towards the first heat exchanger in a heating mode and towards the second heat exchanger in a cooling mode, and a pressure reducing assembly for supplying pressure reduced refrigerant to the first heat exchanger in the cooling mode and to the second heat exchanger in the heating mode, said pressure reducing assembly including an electronic expansion valve having a flow rate related to a duty cycle of an EXV control signal;

a controller for controlling the duty cycle of the EXV control signal such that efficient operation of the first and second heat exchangers is maintained and for controlling the duty cycle of the compressor control signal such that a desired quantity of heat is transferred between the outside environment and the passenger compartment;

a first sensor coupled to the controller for sensing the compressor suction pressure level to regulate the duty cycle of the EXV control signal; and

29

a second sensor coupled to the controller for sensing a refrigerant parameter reflective of an evaporator outlet refrigerant temperature;

wherein the controller calculates a refrigerant superheat temperature based on the compressor suction pressure and the evaporator outlet refrigerant temperature, said controller controls the duty cycle of the EXV control signal such that the refrigerant superheat temperature is maintained substantially at a predetermined superheat temperature, whereby the evaporator is efficiently used for transferring heat energy.

7. The control system of claim 6 further comprising:

a temperature selector for setting a target temperature for the passenger compartment;

wherein the controller determines a desired compressor suction pressure level corresponding to the target temperature and regulates the duty cycle of the compressor control signal such that the desired compressor suction pressure level is substantially maintained.

30

8. The control system of claim 6 further comprising:

a first sensor coupled to the controller, the first sensor for sensing a refrigerant parameter reflective of an evaporator refrigerant saturation temperature;

a second sensor coupled to the controller, the second sensor for sensing a refrigerant parameter reflective of an evaporator outlet refrigerant temperature; and

wherein the controller calculates a refrigerant superheat temperature based on the evaporator refrigerant saturation and the evaporator outlet refrigerant temperature; said controller controls the duty cycle of the EXV control signal such that the refrigerant superheat temperature is maintained substantially at a predetermined superheat temperature, whereby the evaporator is efficiently used for transferring heat energy.

9. The control system of claim 8 wherein the predetermined superheat temperature is 4° F.

* * * * *