



US007246656B2

(12) **United States Patent**
Ichishi et al.

(10) **Patent No.:** **US 7,246,656 B2**
(45) **Date of Patent:** **Jul. 24, 2007**

(54) **VEHICLE AIR CONDITIONER**

(75) Inventors: **Yoshinori Ichishi**, Kariya (JP); **Tatsuya Ito**, Obu (JP); **Tatsumi Kumada**, Gamagori (JP)

(73) Assignee: **DENSO Corporation**, Kariya (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 452 days.

5,531,377 A * 7/1996 Thayer et al. 236/49.3
6,155,492 A * 12/2000 Hinterwaller et al. 236/51
6,397,615 B1 6/2002 Kawai et al.
6,659,358 B2 * 12/2003 Kamiya et al. 236/91 C
6,828,560 B2 * 12/2004 Lambert et al. 250/353
6,997,605 B2 * 2/2006 Trapp et al. 374/172
2002/0053601 A1 5/2002 Kamiya et al.
2002/0110178 A1 * 8/2002 Puranen et al. 374/121
2003/0157881 A1 * 8/2003 Goupil et al. 454/158

(21) Appl. No.: **10/694,132**

(22) Filed: **Oct. 27, 2003**

(65) **Prior Publication Data**

US 2004/0089005 A1 May 13, 2004

(30) **Foreign Application Priority Data**

Oct. 30, 2002 (JP) 2002-315889
Aug. 29, 2003 (JP) 2003-307359
Sep. 1, 2003 (JP) 2003-308624

(51) **Int. Cl.**
B60H 1/00 (2006.01)

(52) **U.S. Cl.** **165/202**; 165/42; 165/43;
236/91 C; 236/49.3; 250/338.1; 374/121;
374/141; 374/132

(58) **Field of Classification Search** 236/49.3,
236/51, 91 C; 374/121, 141, 132; 165/11.1,
165/202, 42, 43; 250/338.1

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,518,176 A * 5/1996 Turner et al. 236/49.3

FOREIGN PATENT DOCUMENTS

JP 63255116 A * 10/1988
JP 2001097019 A * 4/2001
JP 2001347816 A * 12/2001
JP 2001349786 A * 12/2001

* cited by examiner

Primary Examiner—John K. Ford

(74) *Attorney, Agent, or Firm*—Harness, Dickey & Pierce, PLC

(57) **ABSTRACT**

A vehicle air conditioner has an IR sensor that detects a temperature of air inside a vehicle compartment. The IR sensor is disposed on an instrument panel so that the sensor is disposed above switches and a face blowout port on the instrument panel. Accordingly, a detecting range of the IR sensor is prevented from interfering by hands of a driver or an occupant even when the switches are operated by the driver. Thus, the air conditioner is capable of stable air conditioning.

9 Claims, 20 Drawing Sheets

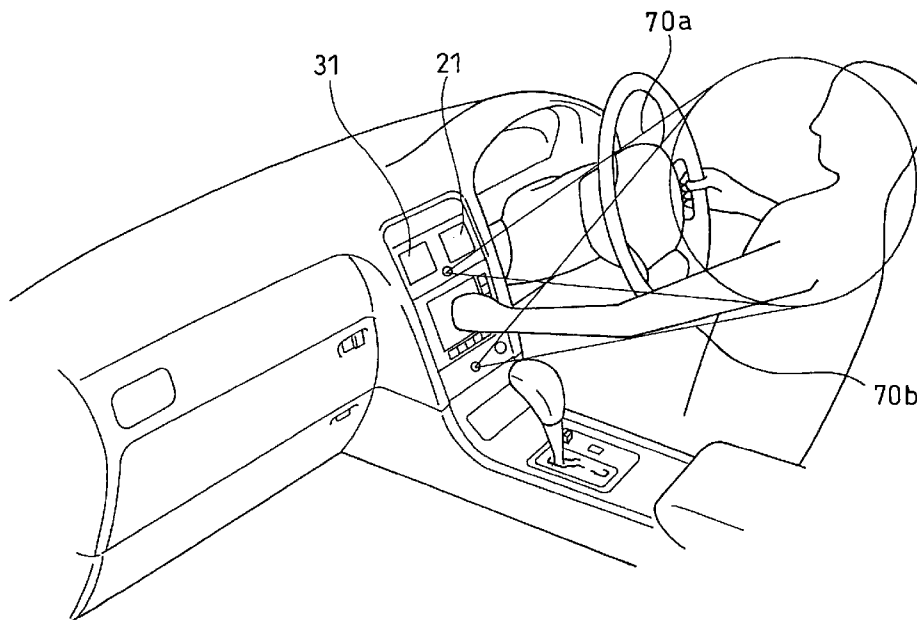


FIG. 1A

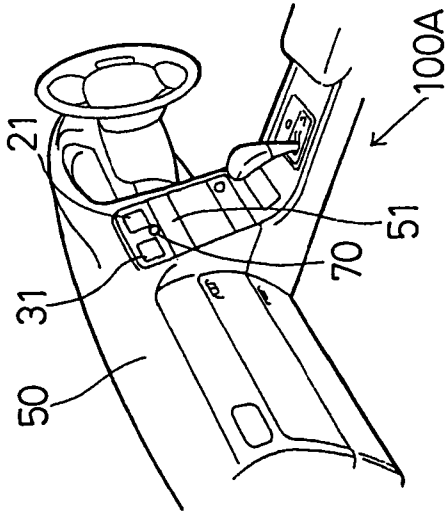


FIG. 1B

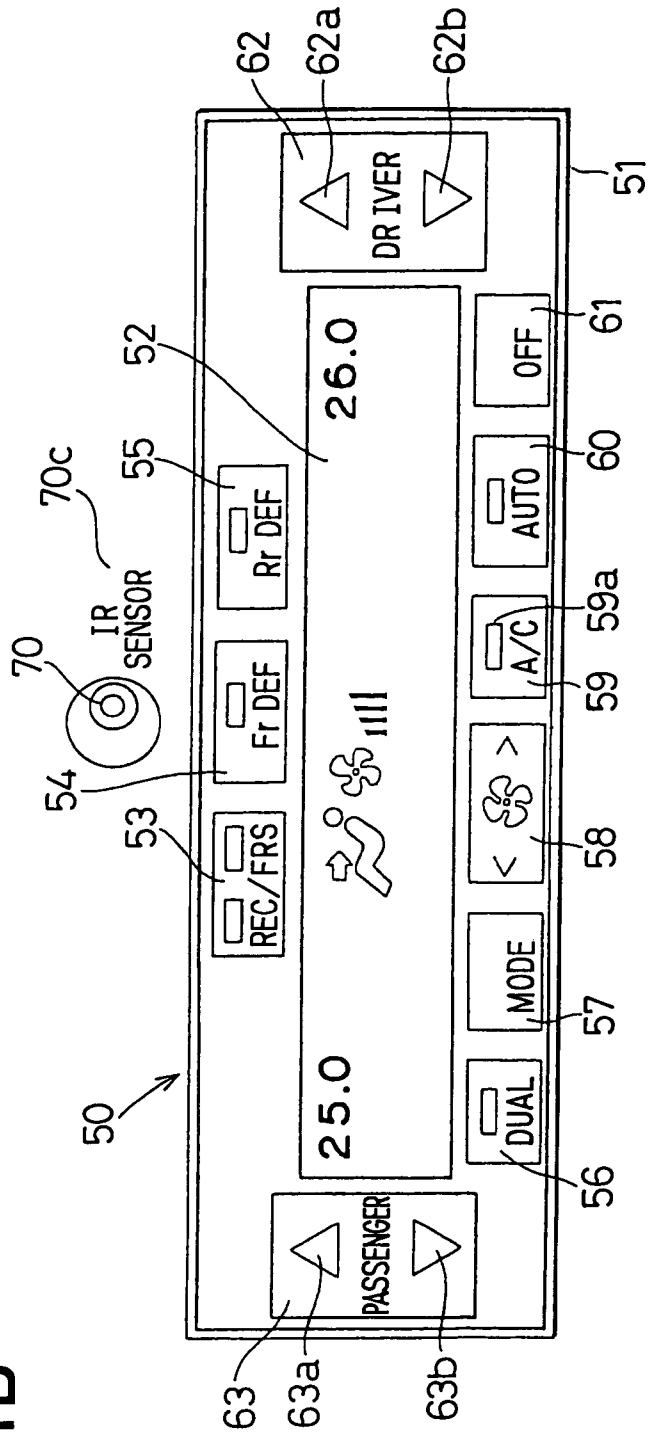


FIG. 2

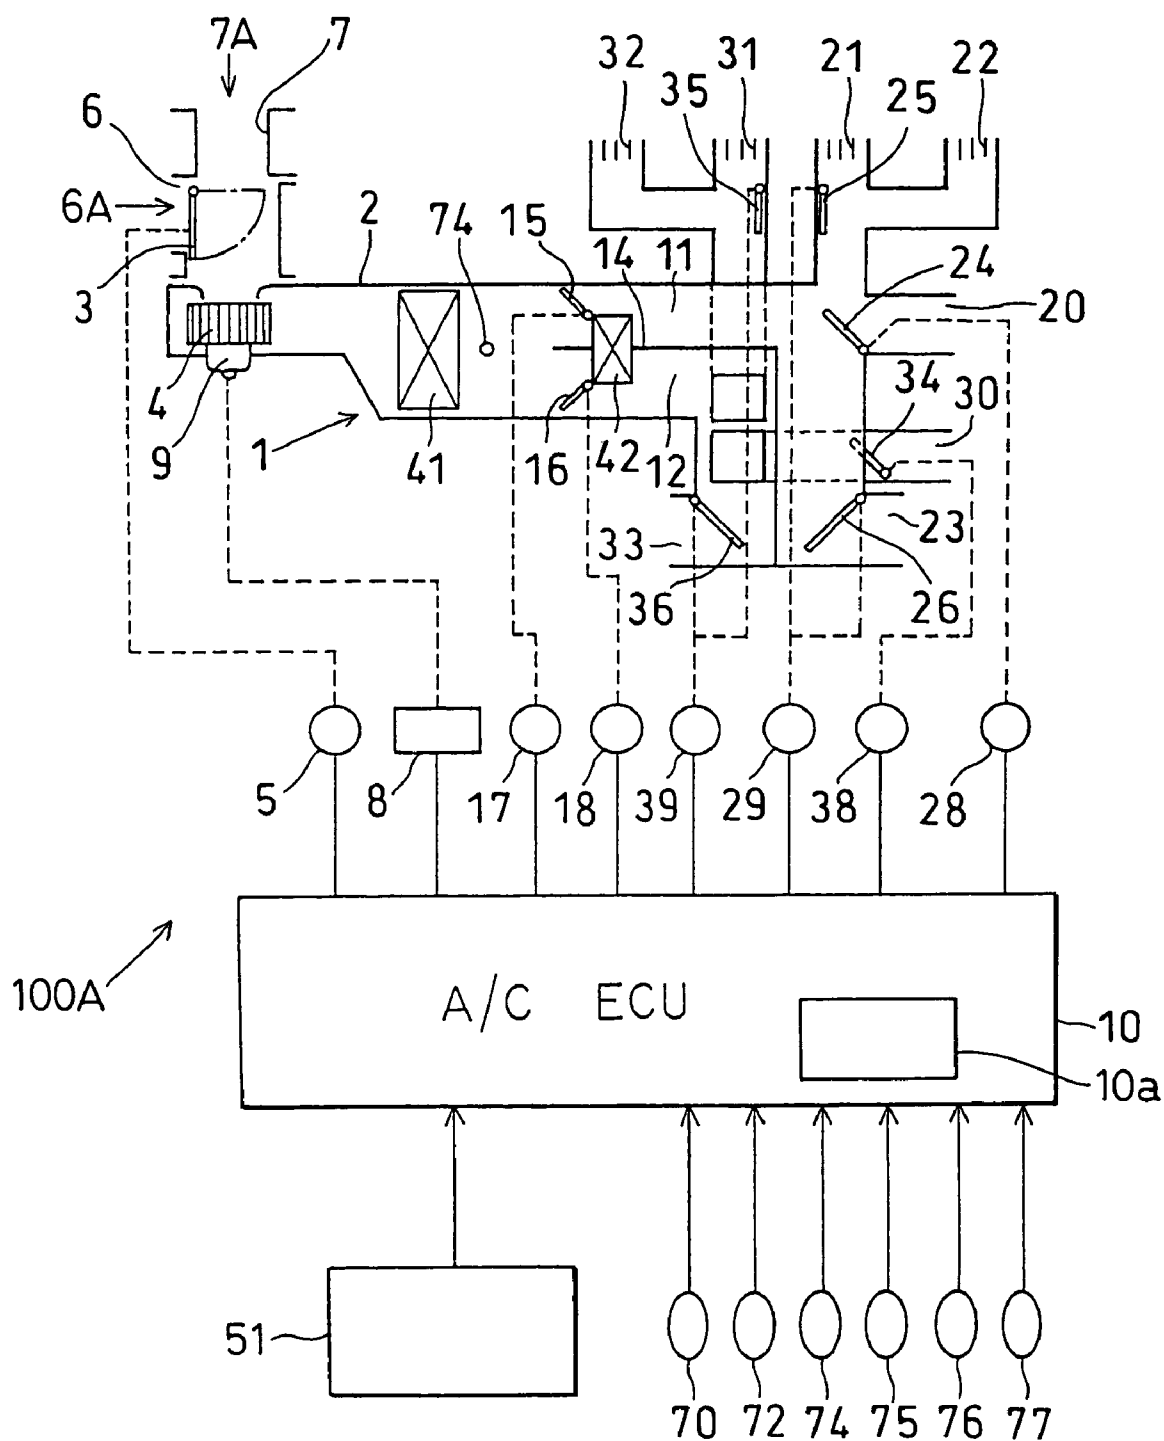


FIG. 3

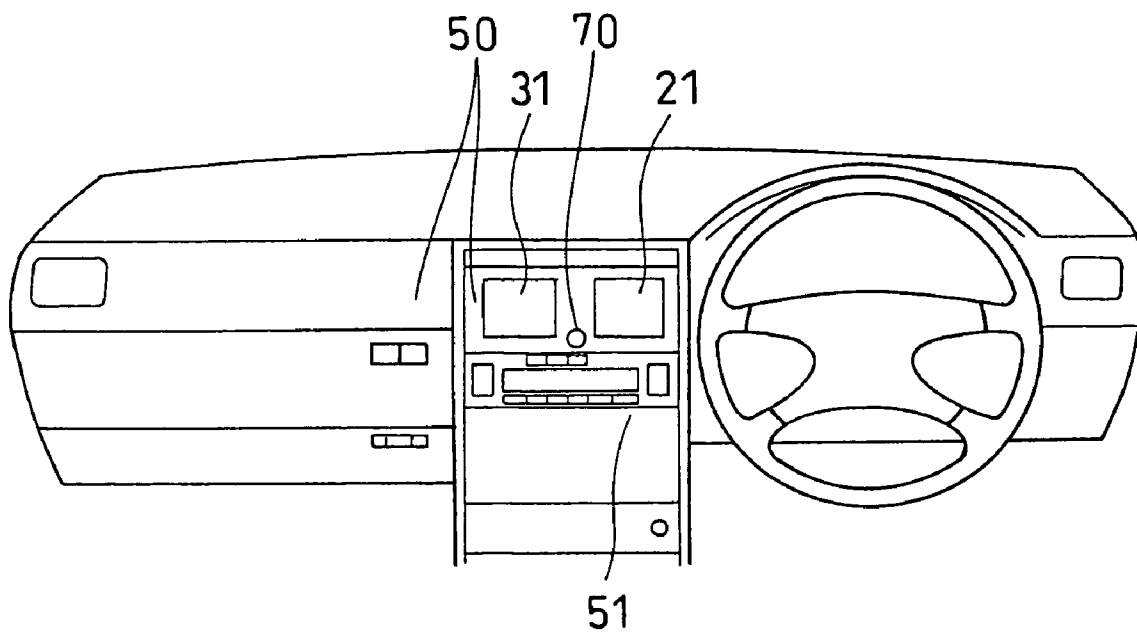


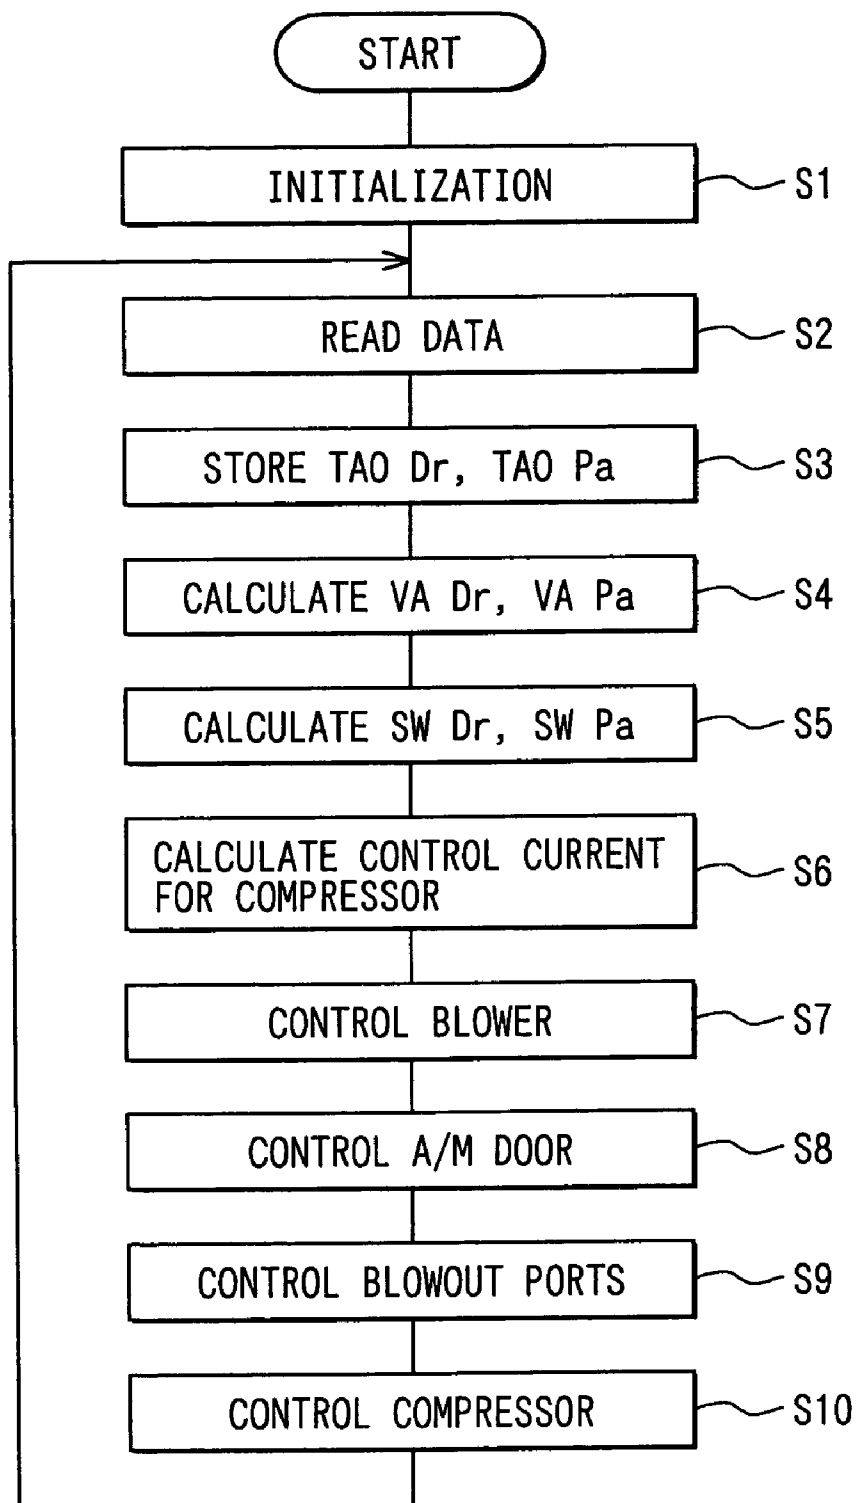
FIG. 4

FIG. 5

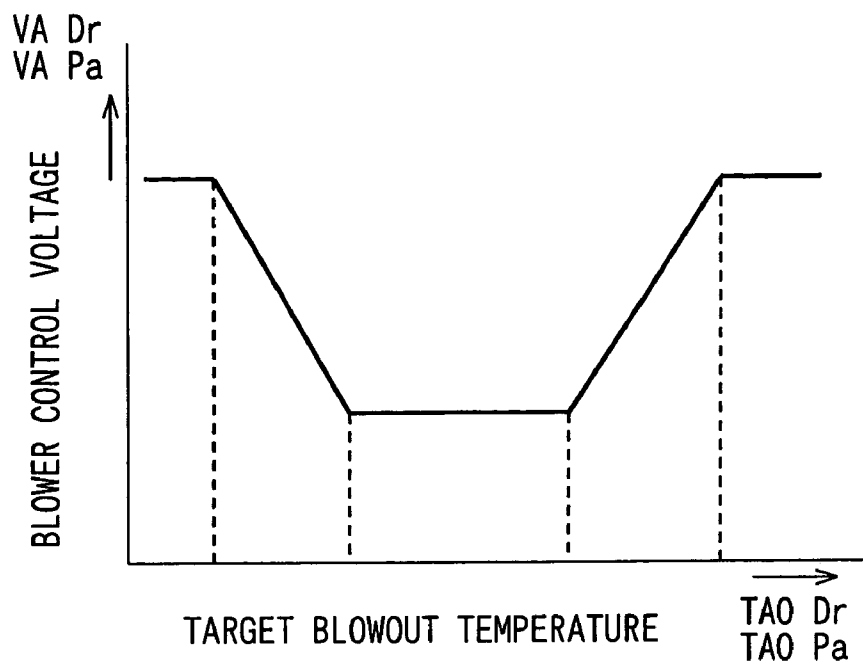
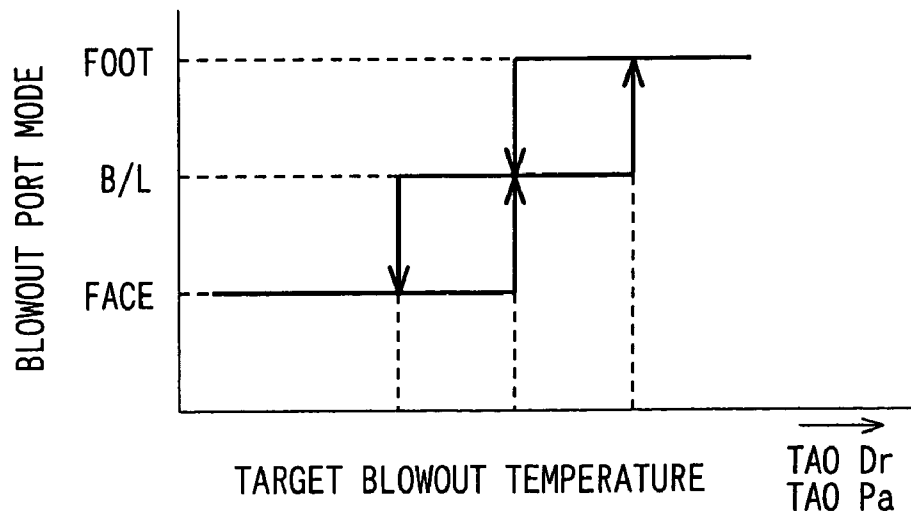


FIG. 6



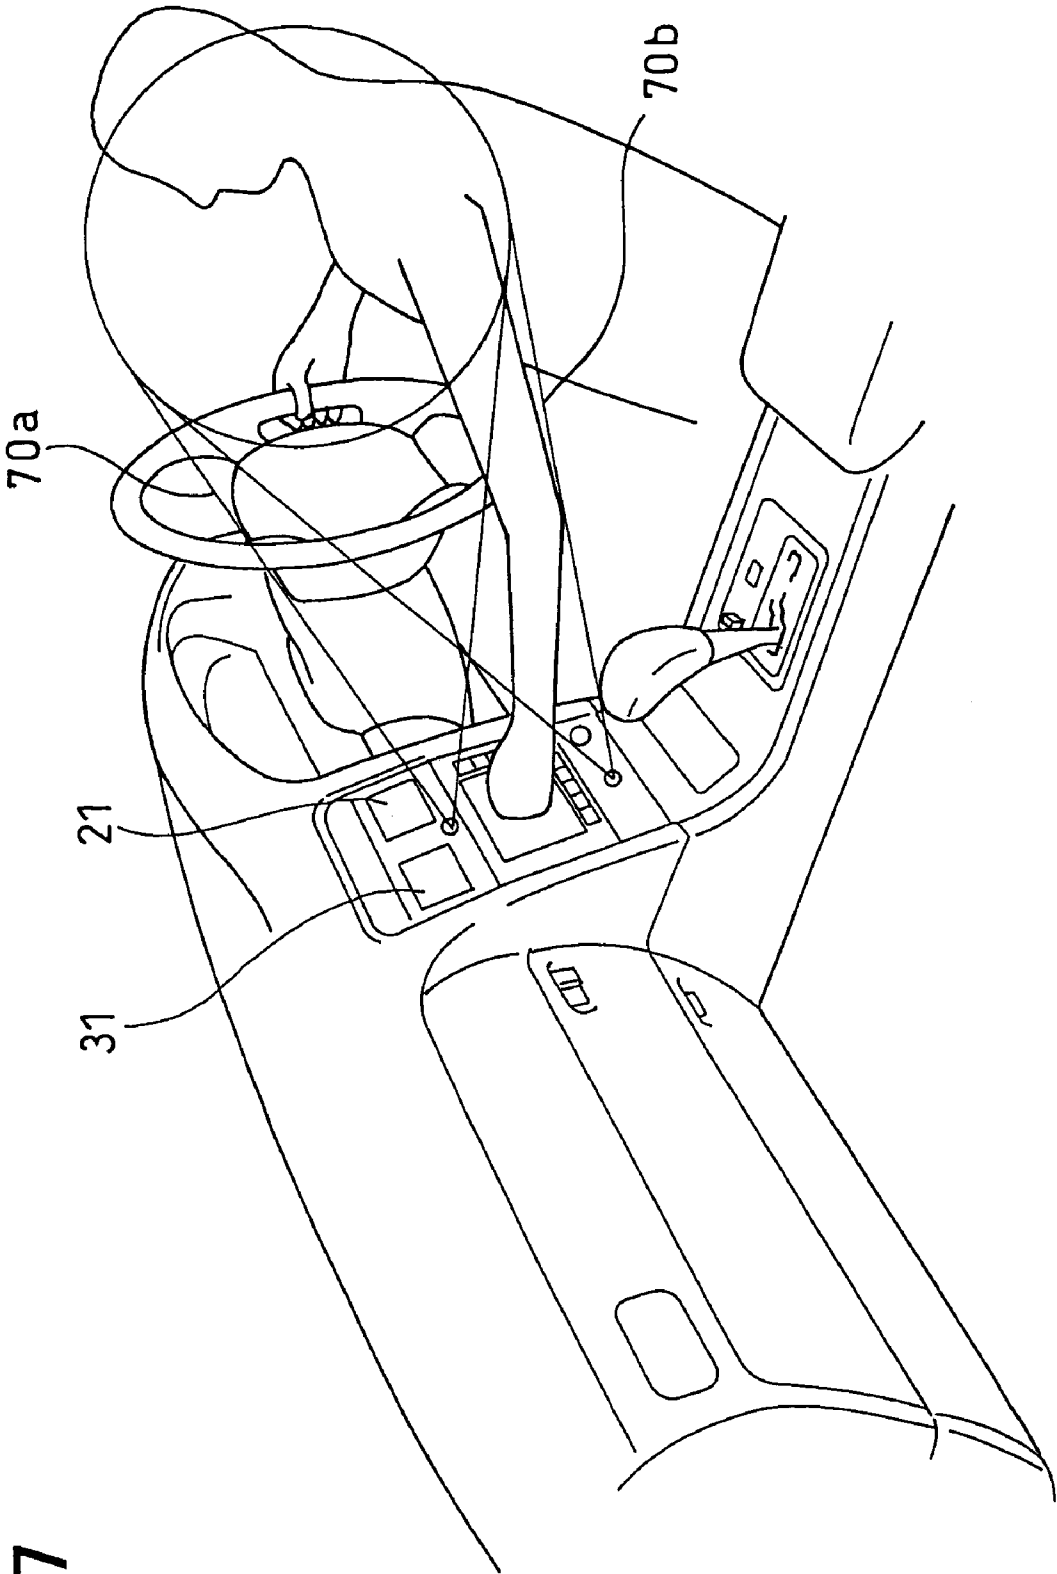


FIG. 7

FIG. 8

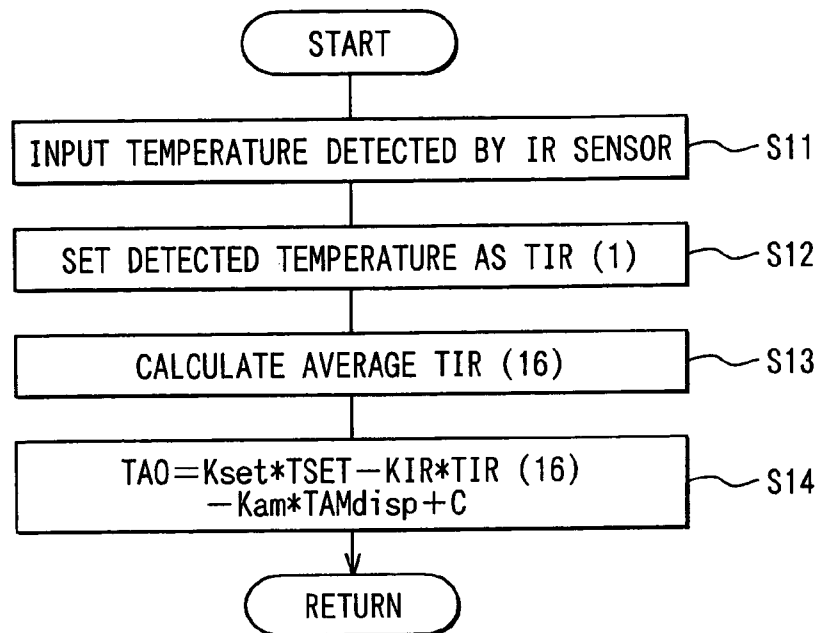


FIG. 10

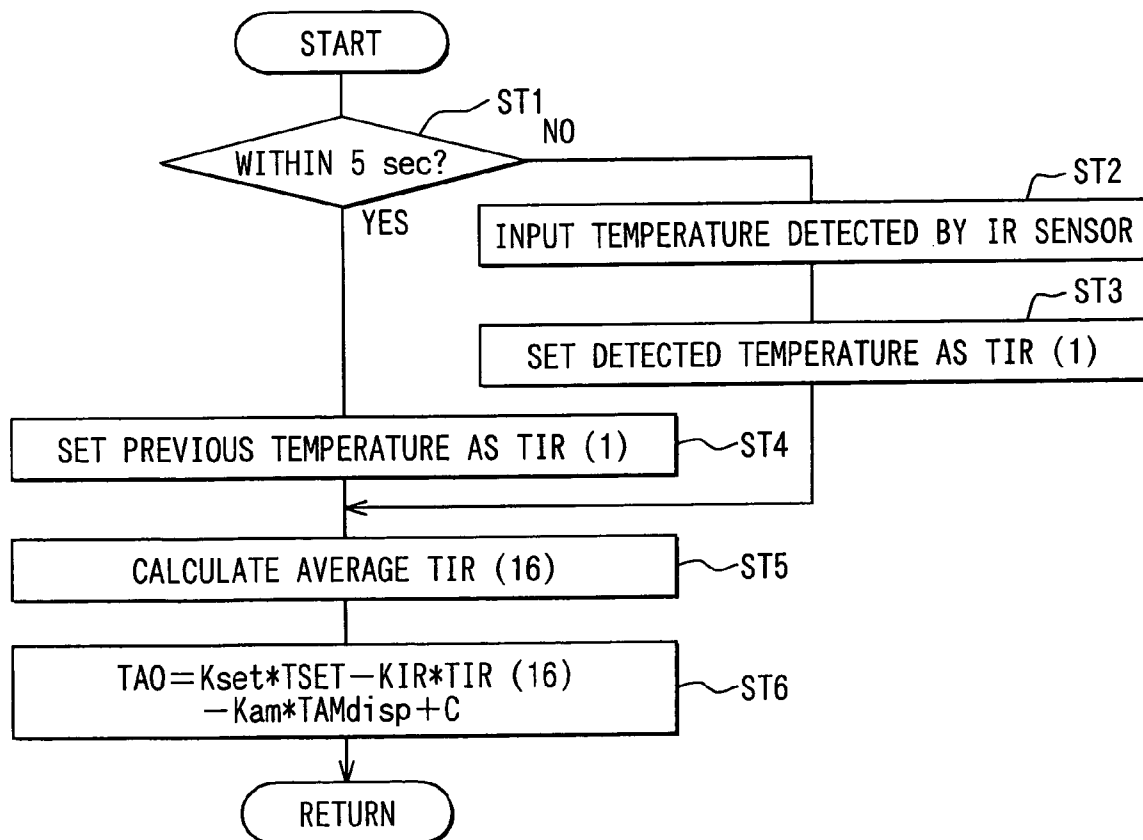


FIG. 9

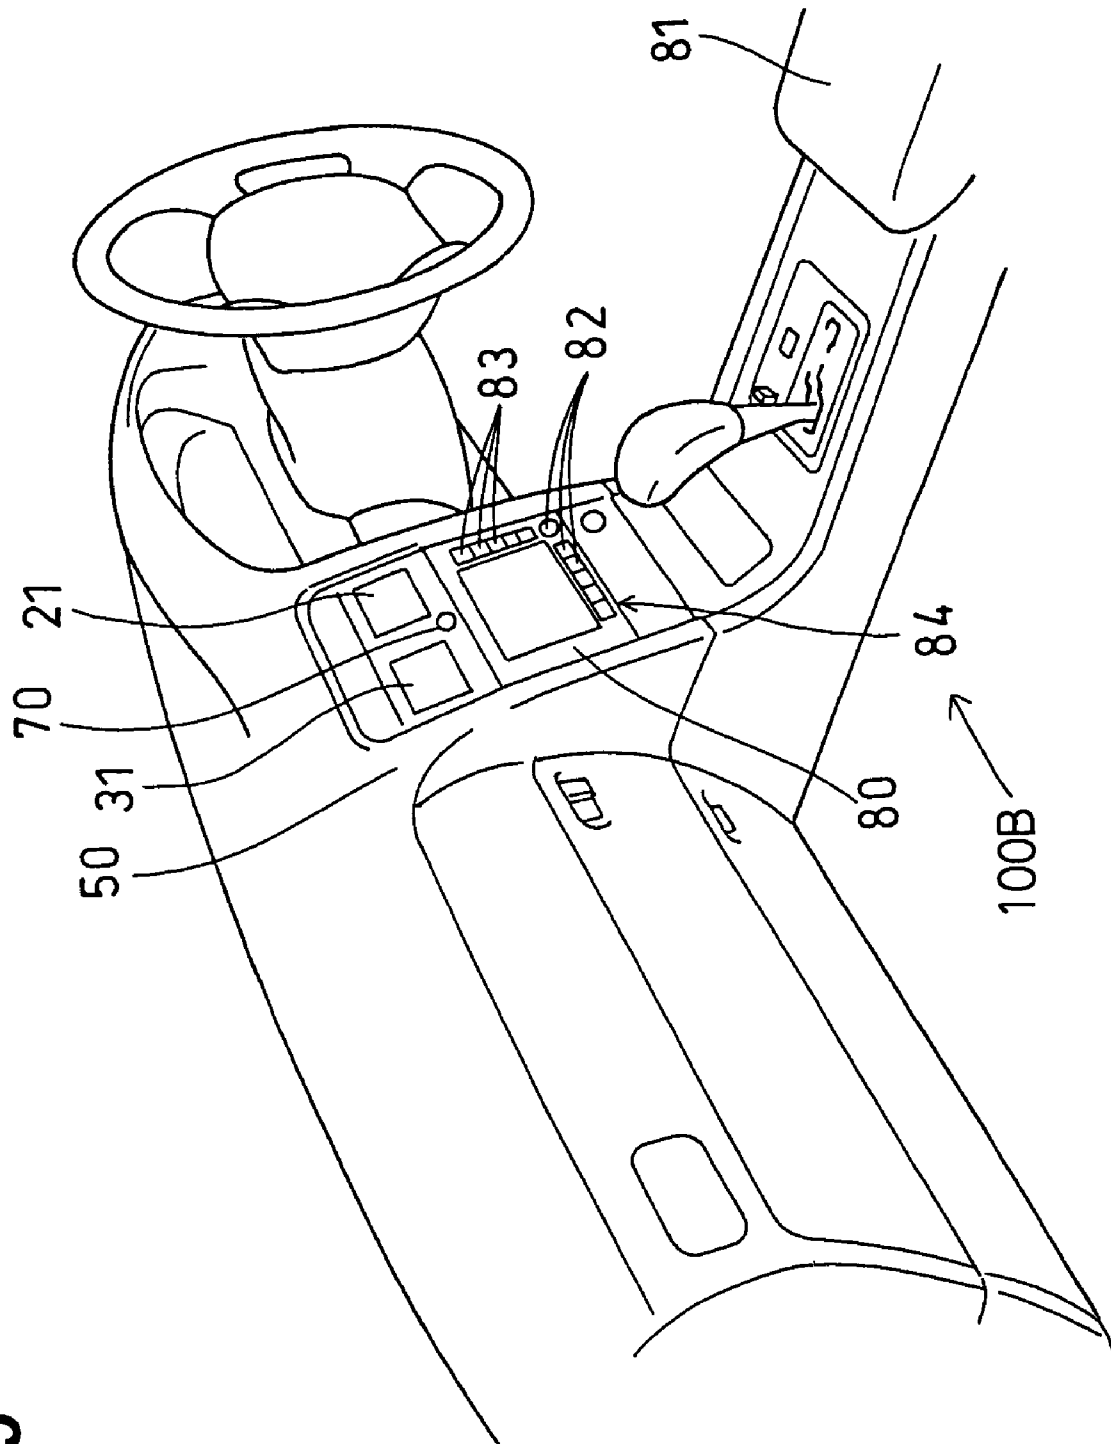


FIG. 11

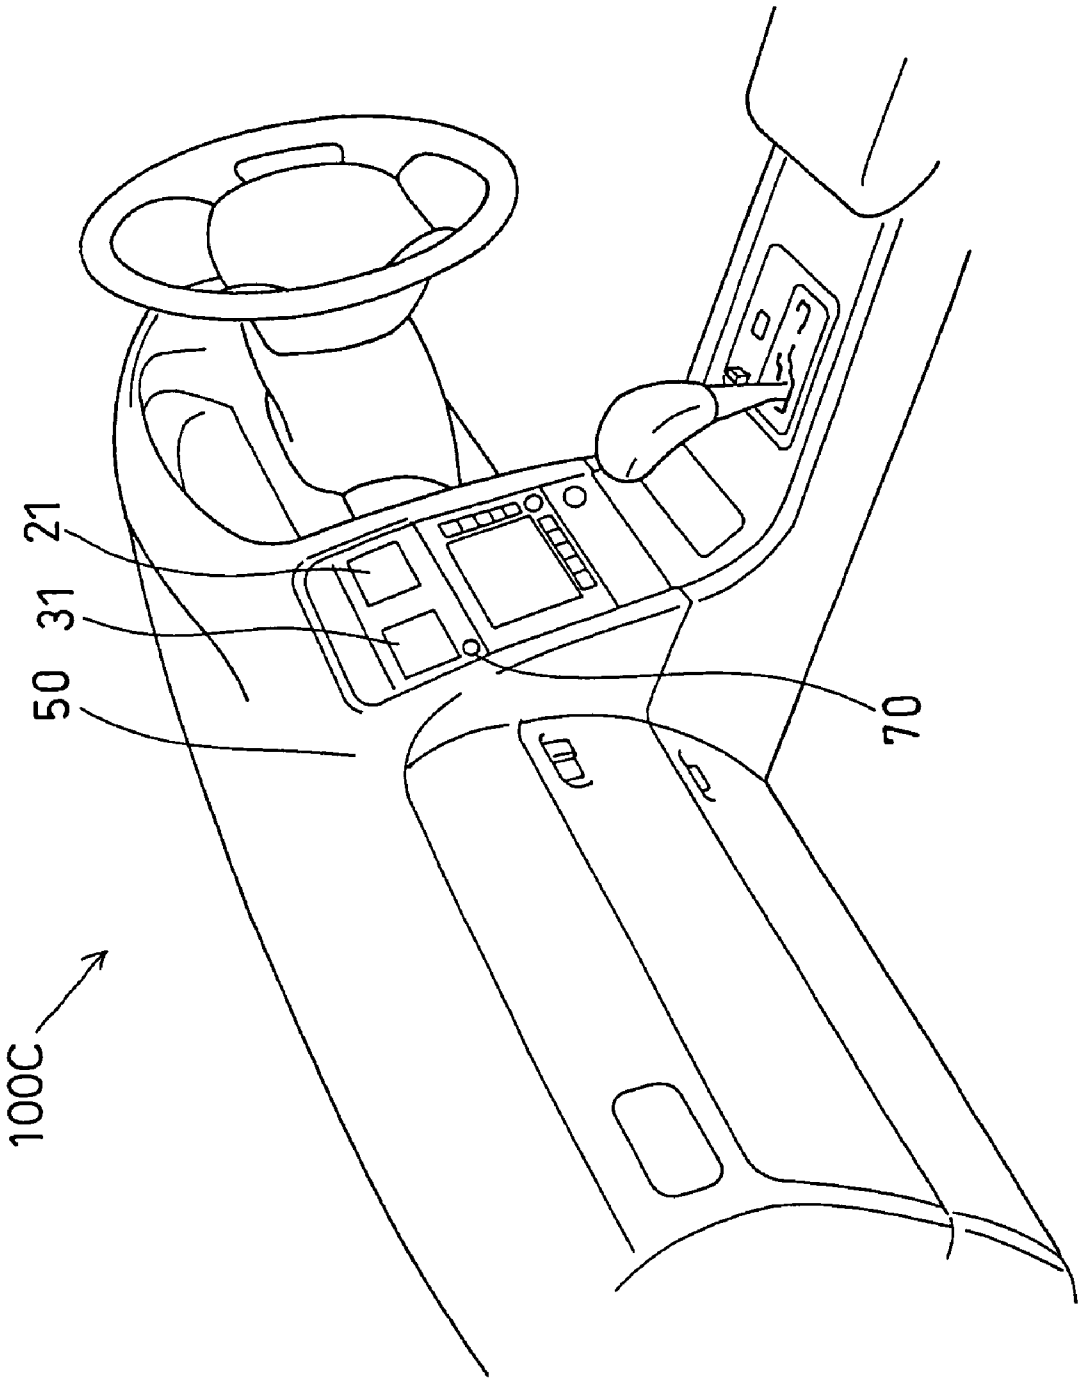


FIG. 12

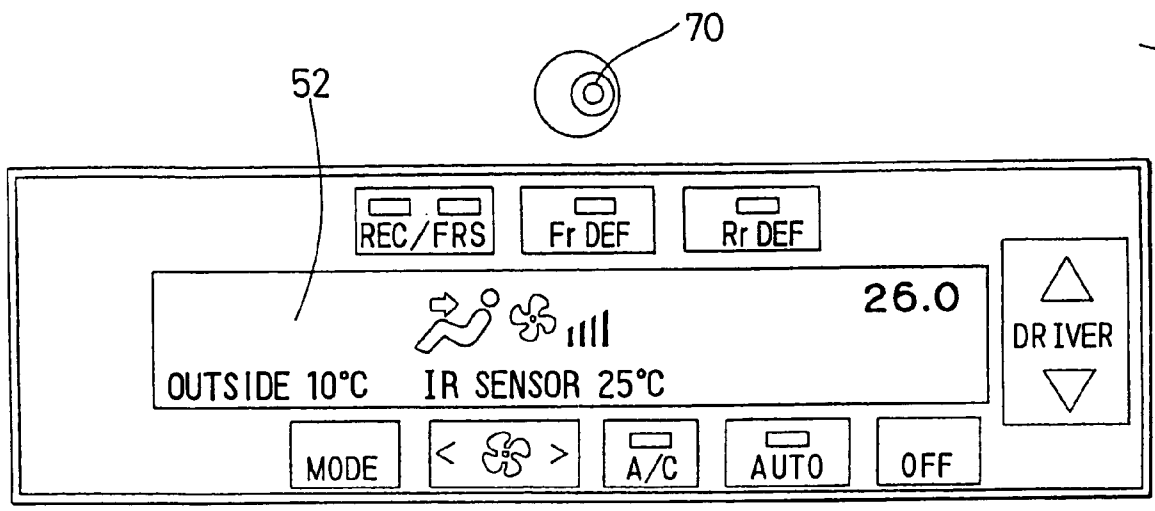


FIG. 13

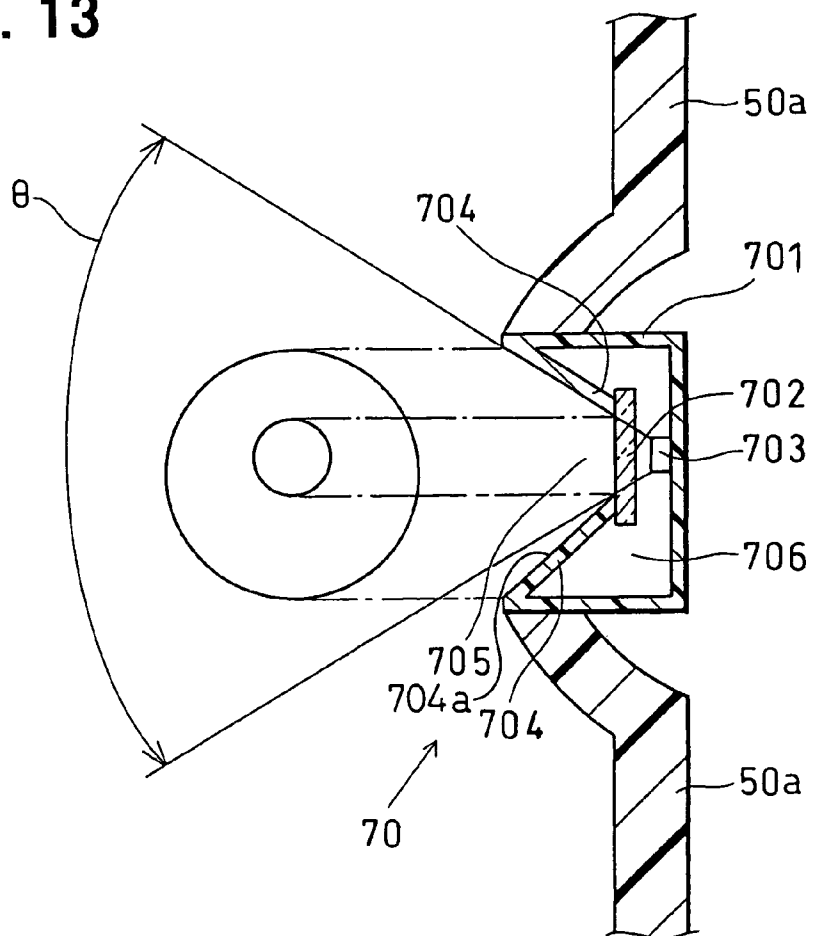


FIG. 14A

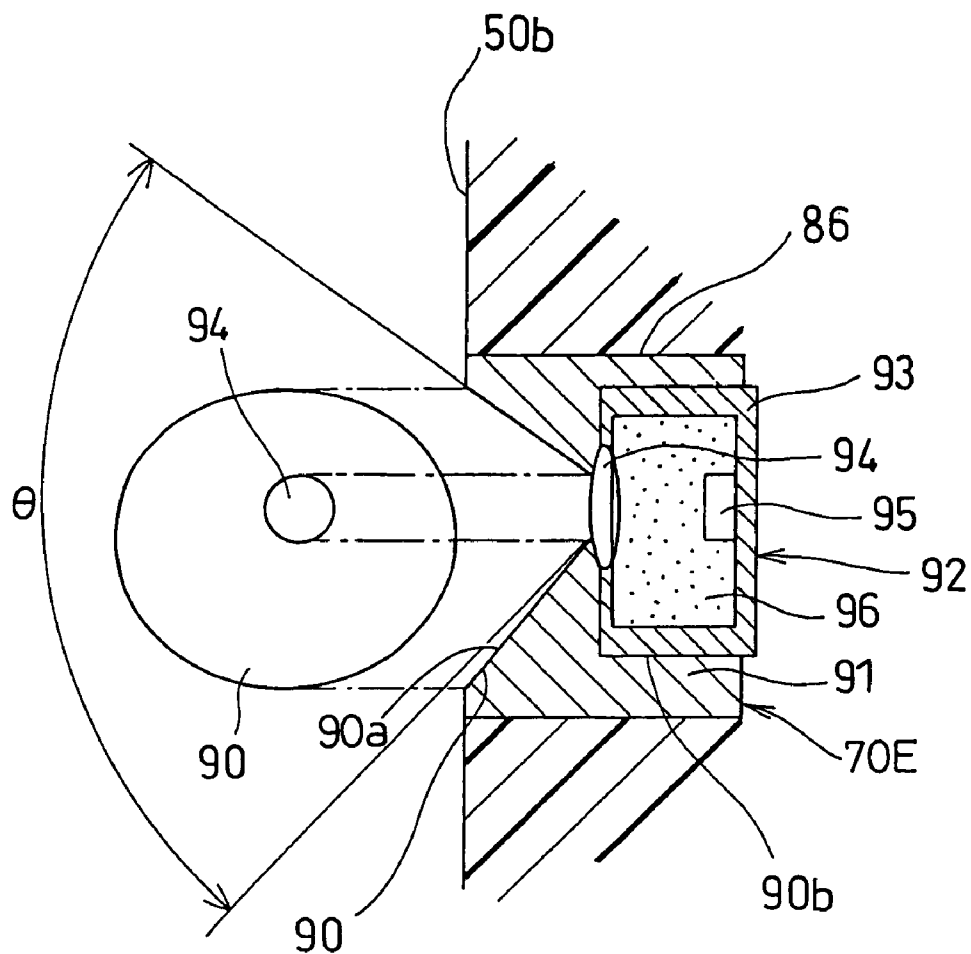


FIG. 14B

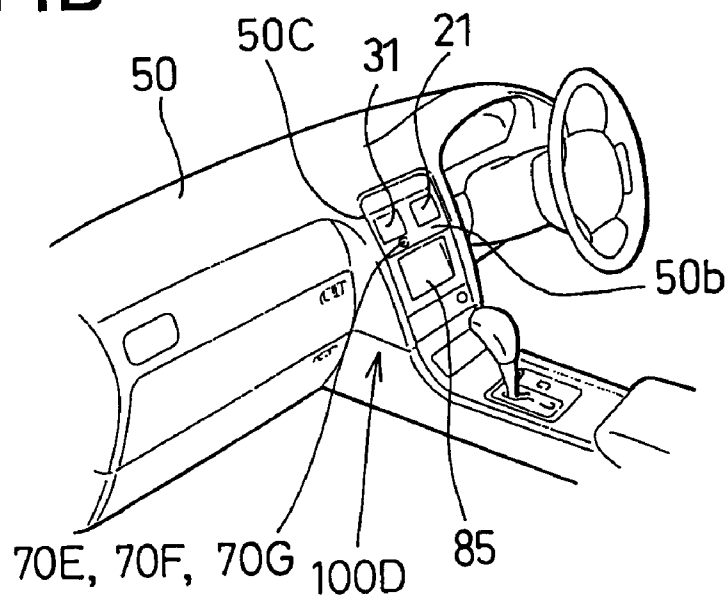


FIG. 15

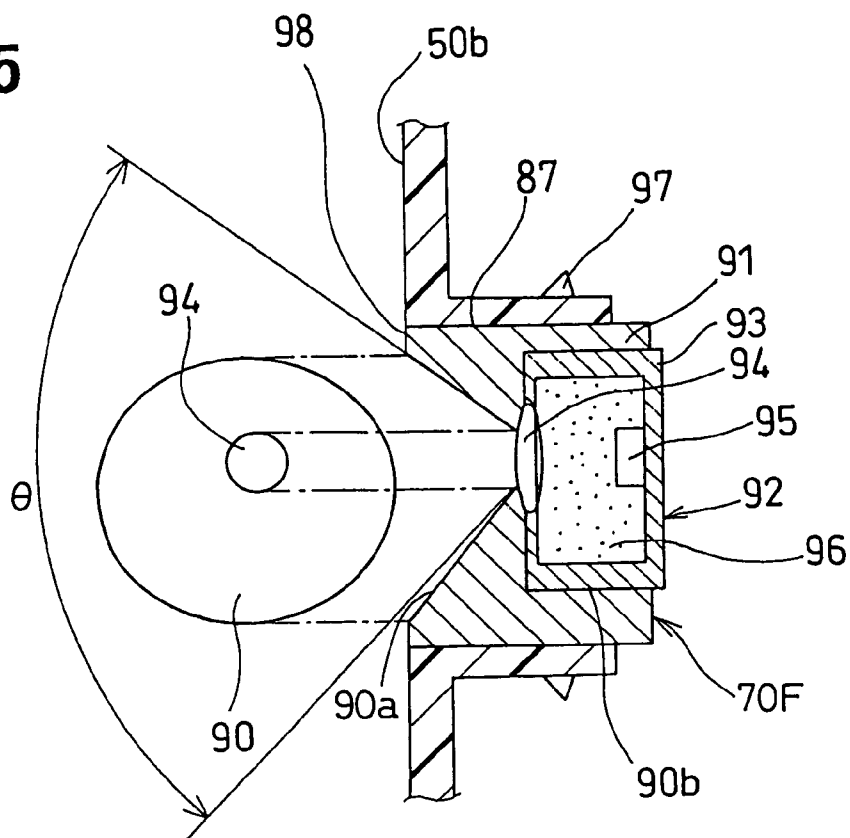


FIG. 16

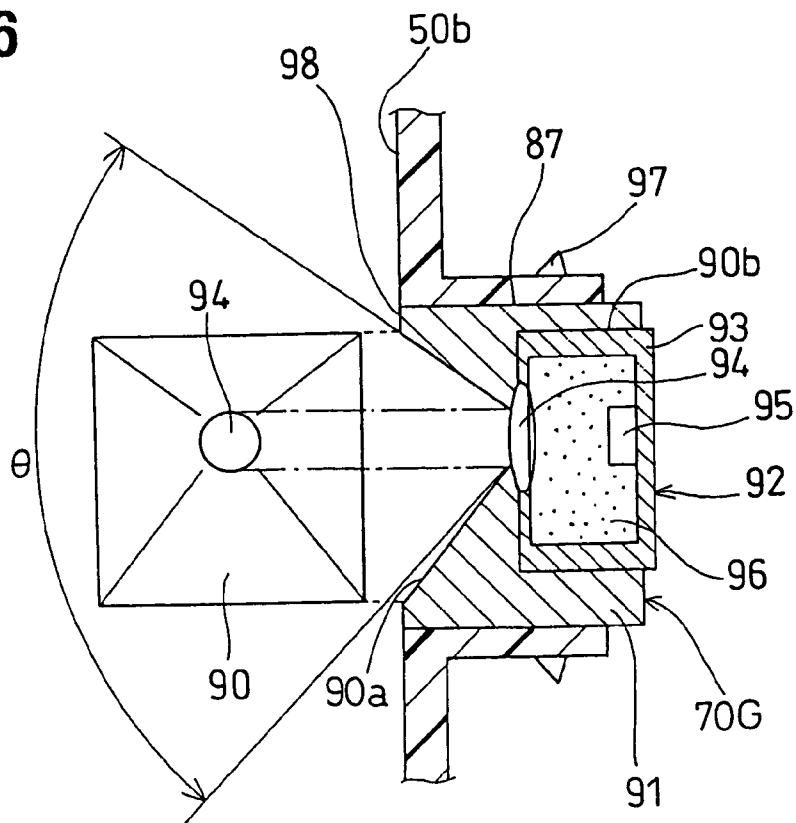


FIG. 17

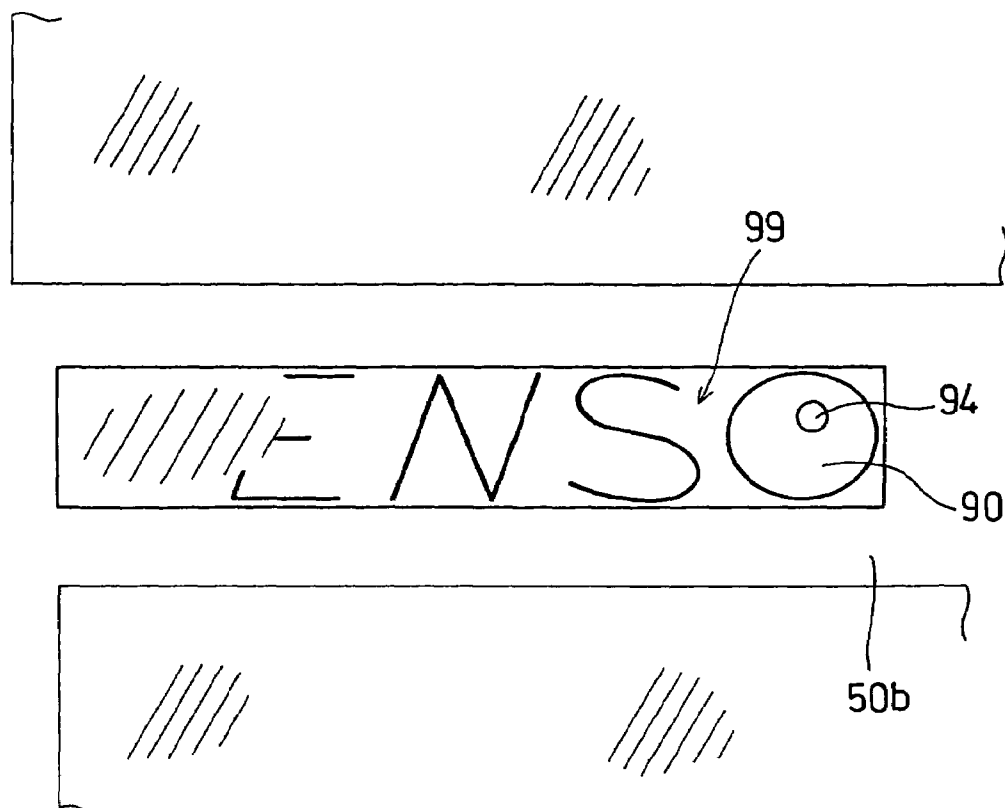


FIG. 18

RELATED ART

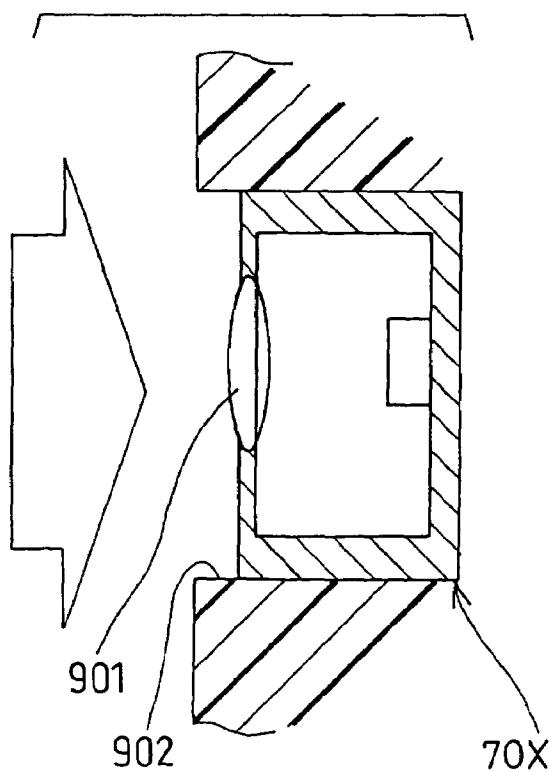


FIG. 19

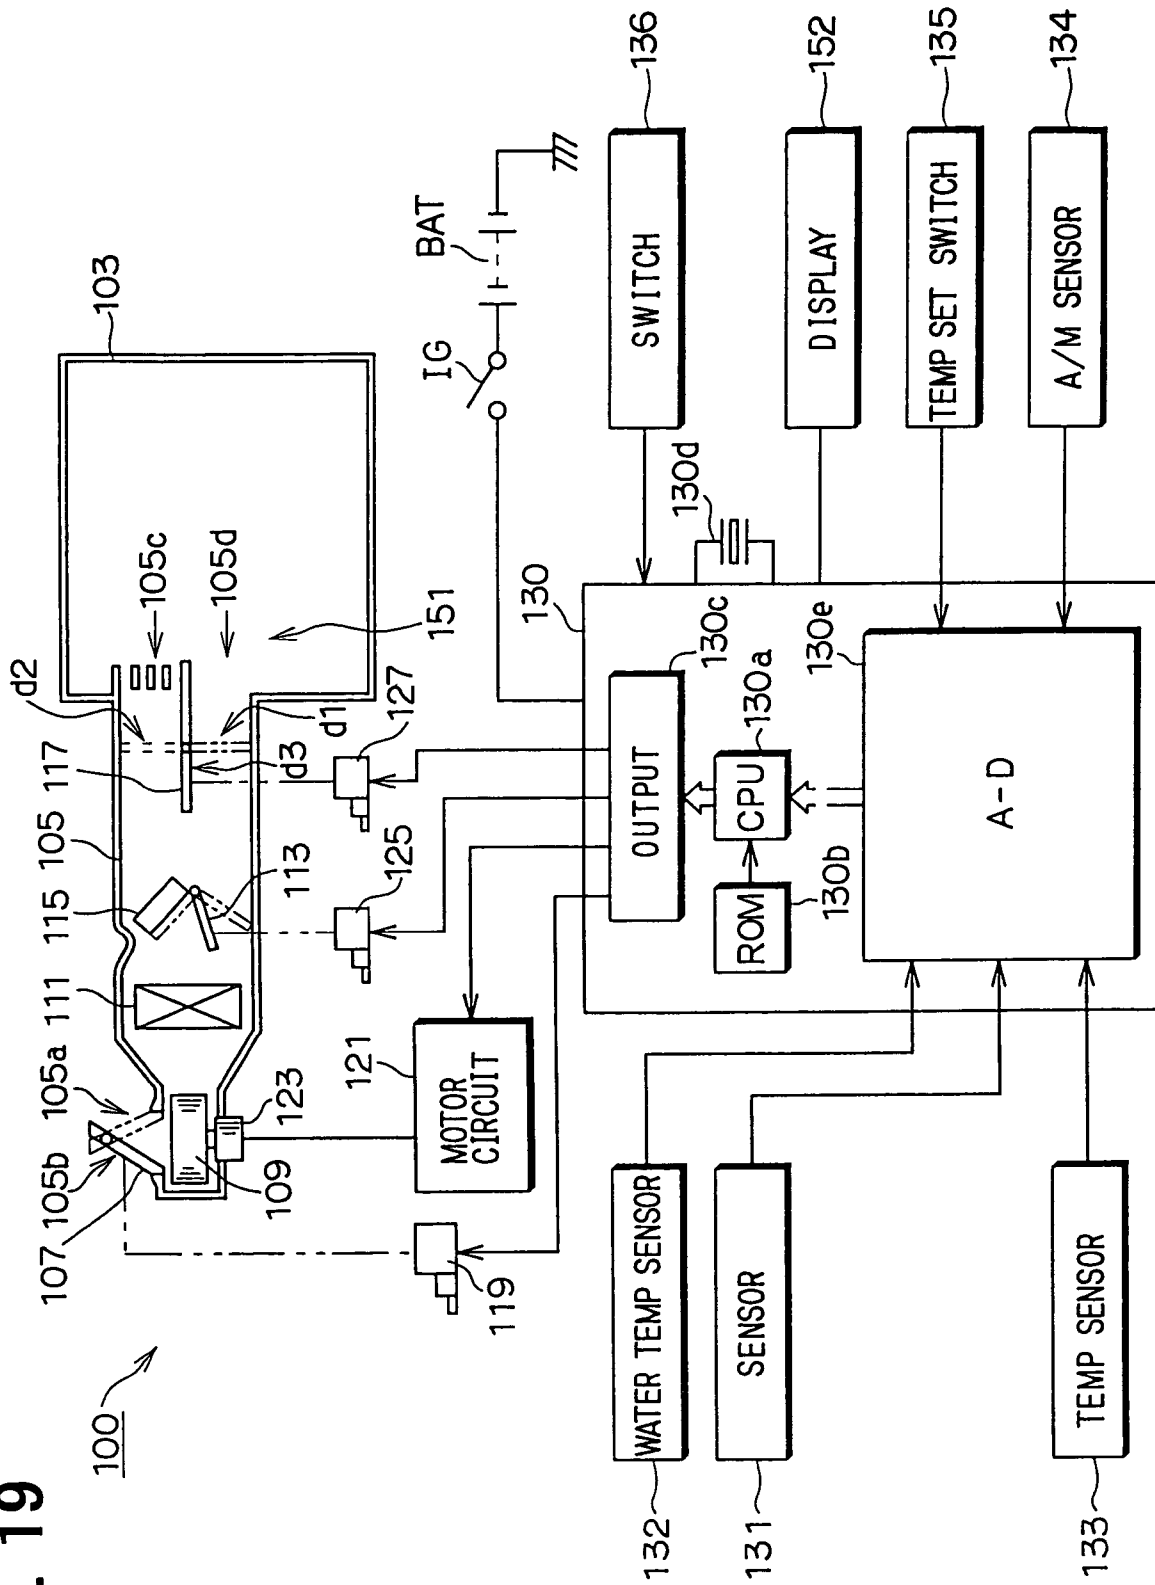


FIG. 20

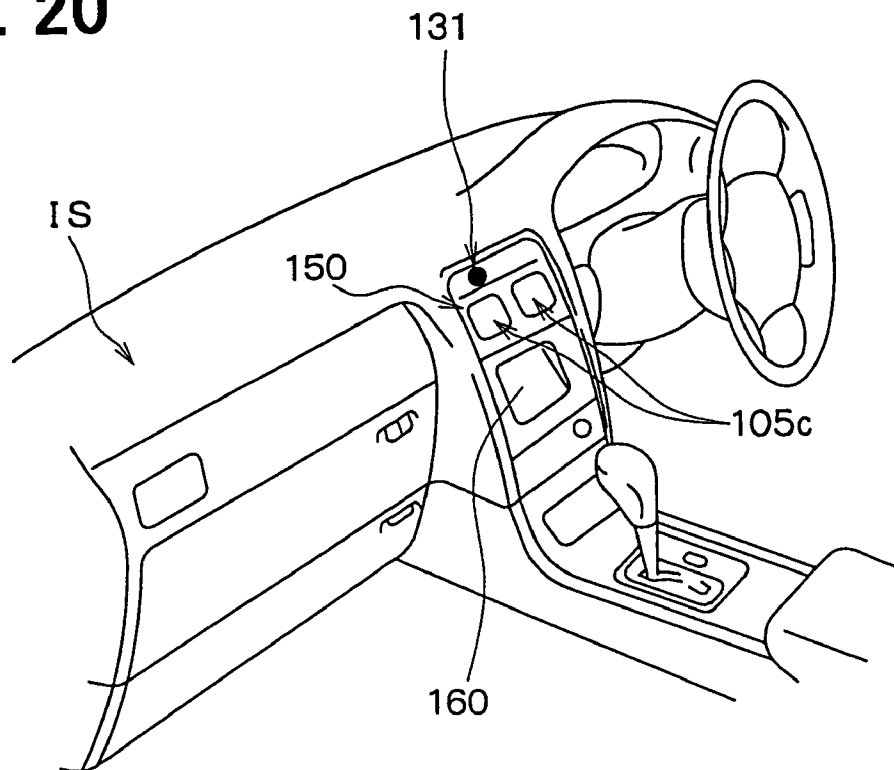


FIG. 22

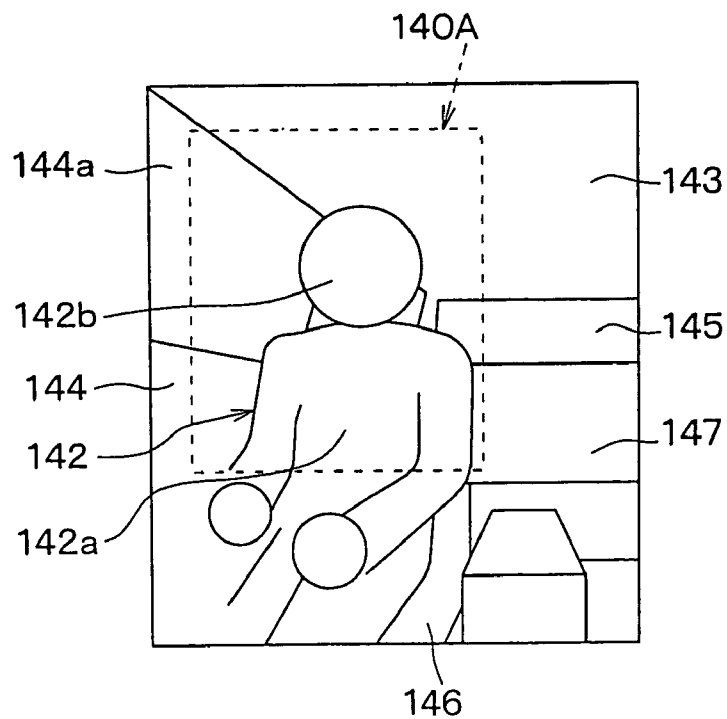


FIG. 21

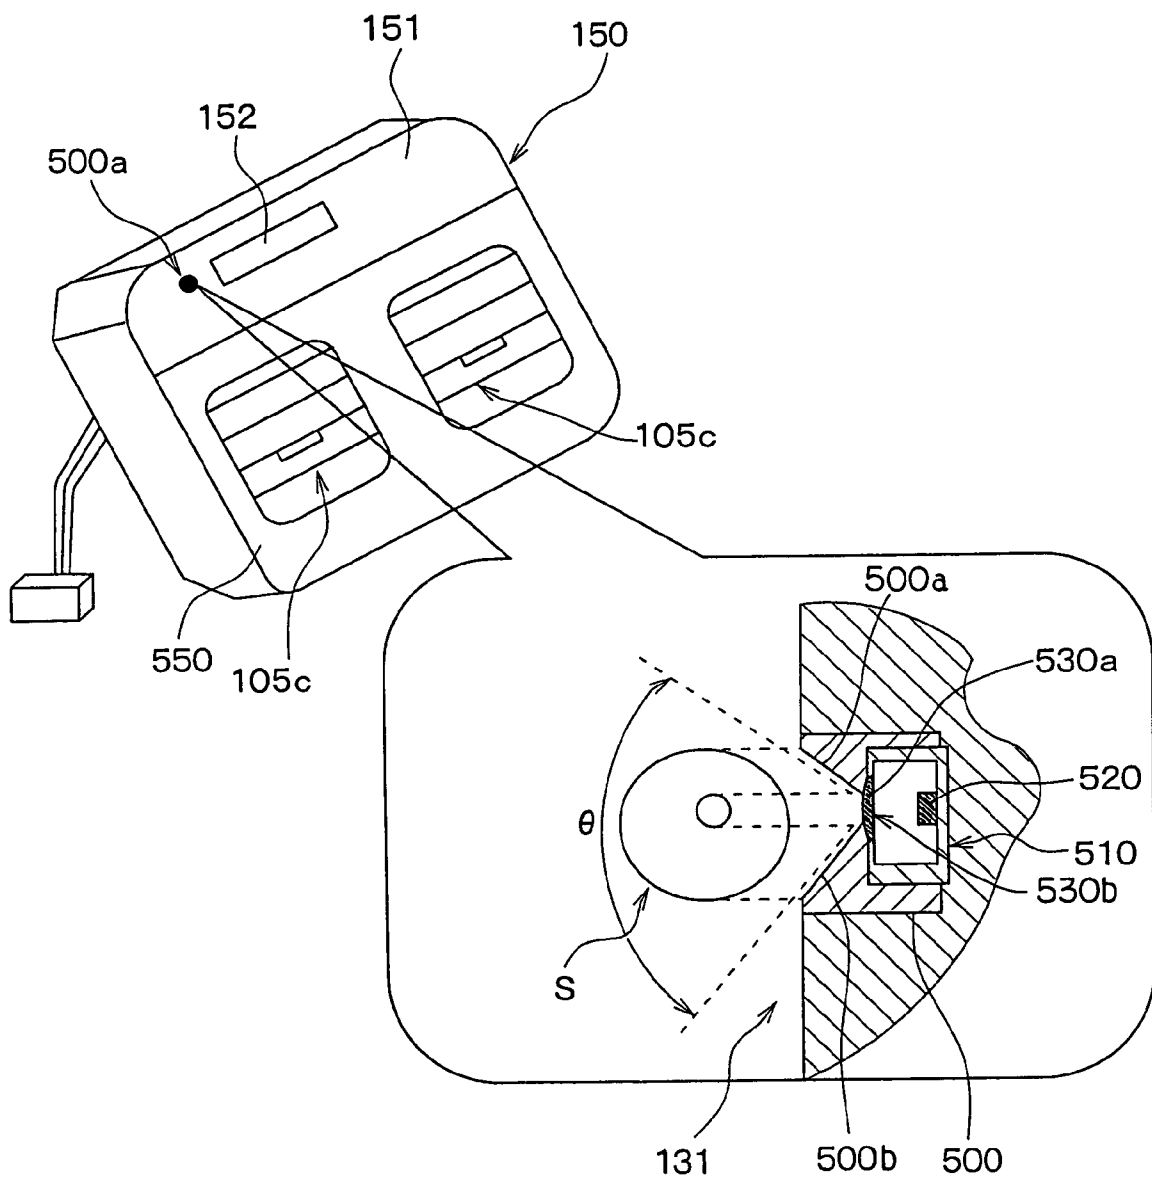


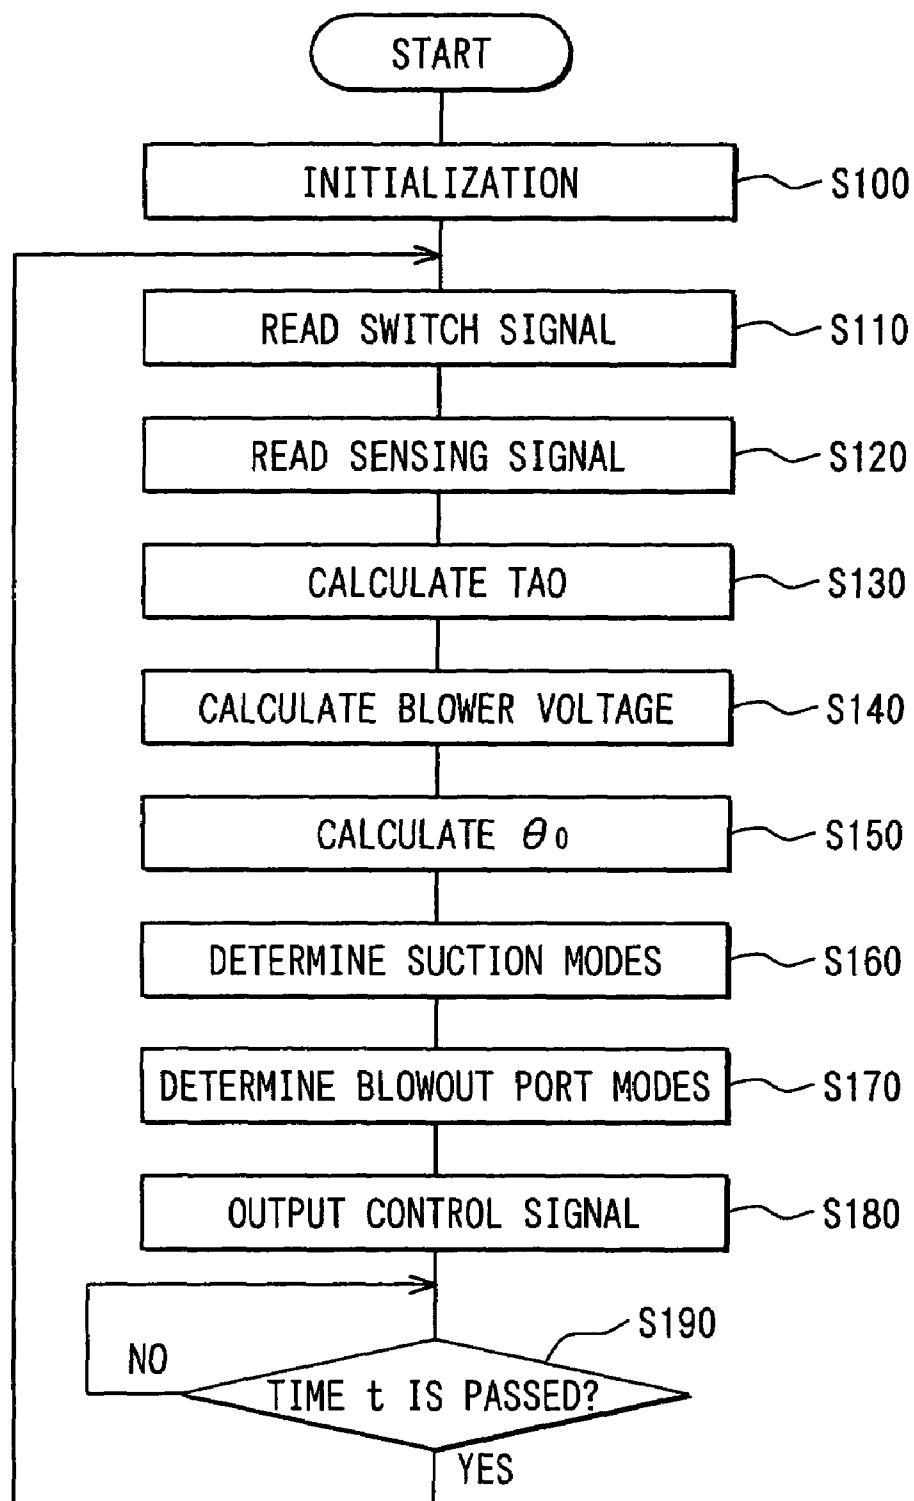
FIG. 23

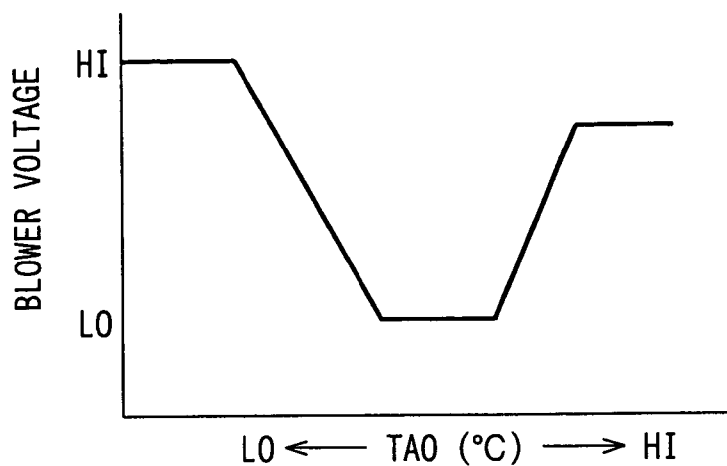
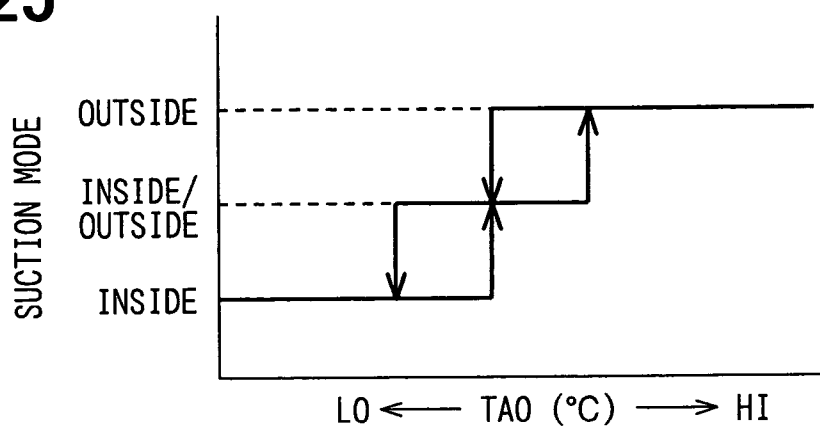
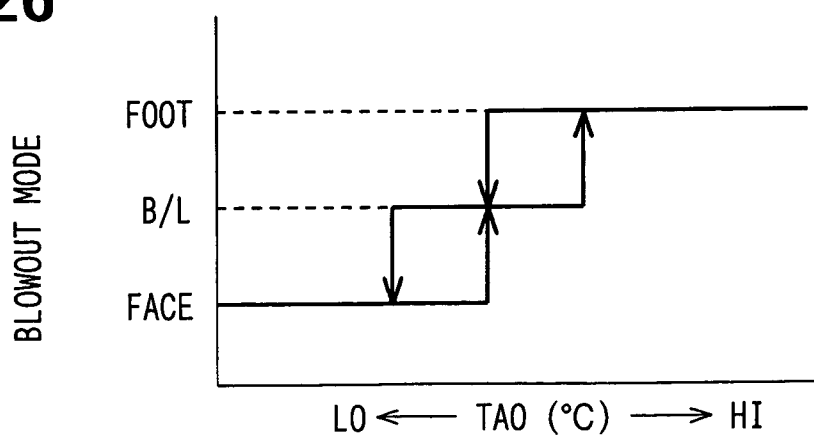
FIG. 24**FIG. 25****FIG. 26**

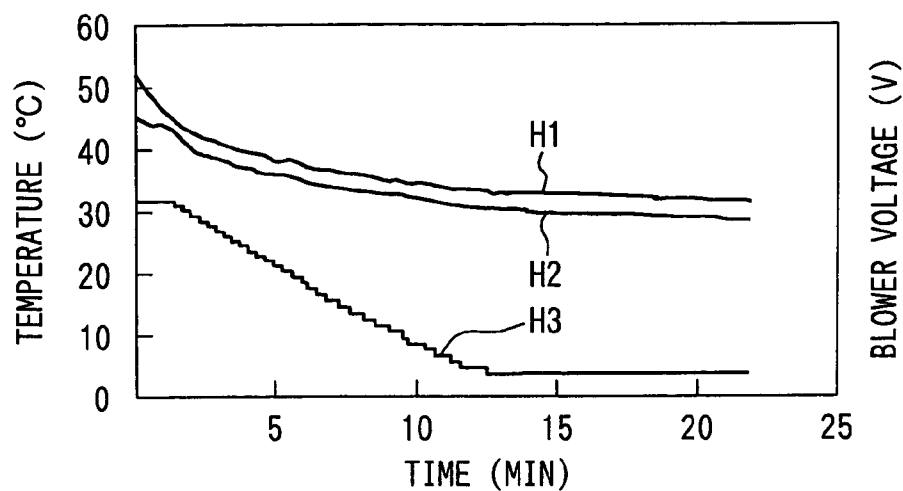
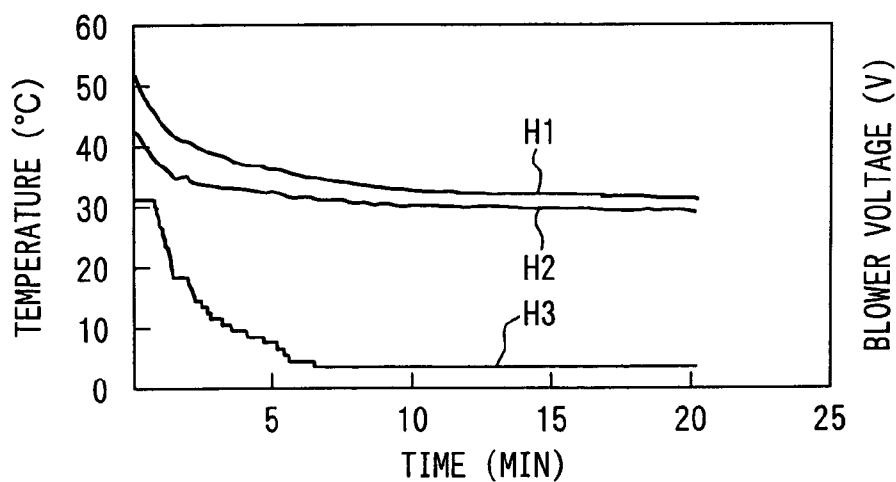
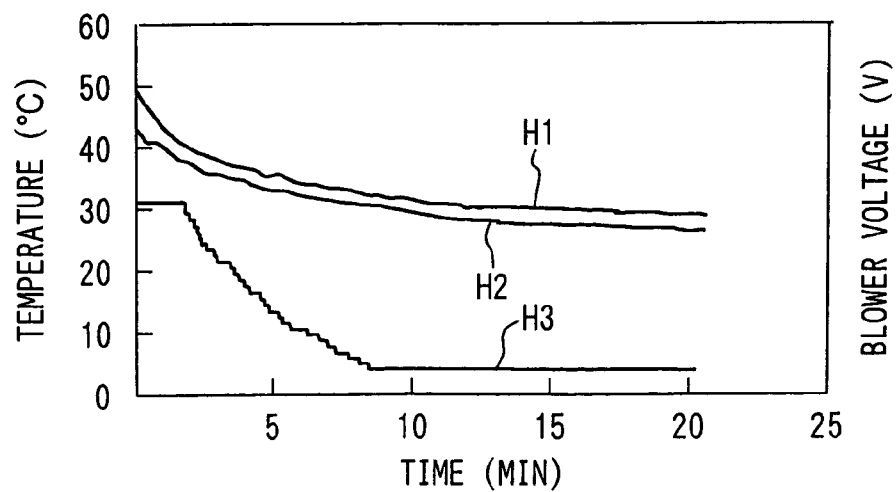
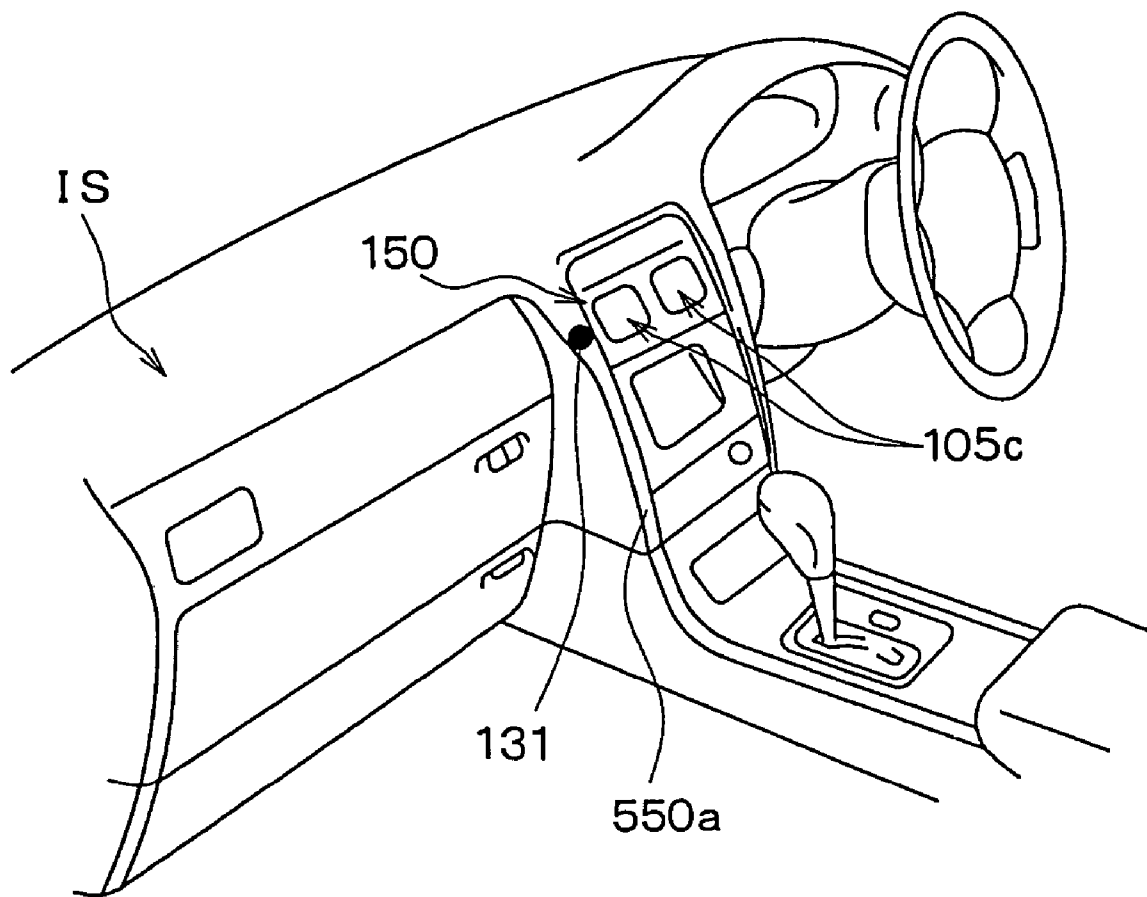
FIG. 27**FIG. 28** RELATED ART**FIG. 30**

FIG. 29

1

VEHICLE AIR CONDITIONER

CROSS REFERENCE TO RELATED
APPLICATION

This application is based on Japanese Patent Applications No. 2002-315889 filed on Oct. 30, 2002, No. 2003-307359 filed on Aug. 29, 2003, and No. 2003-308624 filed on Sep. 1, 2003, the contents of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a vehicle air conditioner that is automatically controlled based on a temperature of the air detected by a non-contact temperature sensor.

2. Description of Related Art

US-2002-0053601A1 discloses an air conditioner for a vehicle. The air conditioner has an infrared temperature sensor, a controller, and a switch. The infrared temperature sensor is disposed in a center of an instrument panel of the vehicle. The sensor detects a temperature around a driver and occupants of a vehicle compartment. The controller controls the air conditioner based on the detected temperature. The switch is disposed on the instrument panel to be operated by the driver and the occupants.

U.S. Pat. No. 6,397,615 discloses another air conditioner for a vehicle. The air conditioner has a thermopile-type infrared temperature sensor, an air conditioning unit, and an electronic controller. The sensor detects the temperature around the driver and the occupants. The air conditioning unit controls the temperature and the air volume of conditioned air. The conditioned air is discharged from a blowout port that is disposed on a facing plate of a vehicle compartment (e.g., front surface of the instrument panel). The controller controls the air conditioning unit based on the temperature detected by the infrared temperature sensor.

In such air conditioners, as shown in FIG. 7, when the switch on the instrument panel is operated by the driver and the occupants, a detecting range 70b of the infrared sensor is interfered with hands of the driver and the occupants. This is because the infrared sensor (non-contact sensor) is disposed in the center of the instrument panel. In such an air conditioner, the infrared sensor fails to detect the temperature around the driver and the occupants accurately. As a result, the air conditioner cannot control conditioned air comfortably.

In addition, when the thermopile-type infrared temperature sensor is disposed under the blowout port, the sensor is affected by cooled air blowing from the blowout port. This is because the cooled air comes down from the blowout port while the air conditioner operates in a cooling mode.

In general, a thermopile-type infrared temperature sensor includes a can-like case, an infrared-absorbing film, and a thermocouple. The can-like case has a window. The infrared-absorbing film is disposed in the case. The film absorbs incident infrared rays through the window and transforms them into heat.

The heat causes temperature difference between a hot side junction and a cold side junction of the thermocouple. The temperature difference causes thermo-electromotive force between the junctions.

Namely, the incident infrared rays from the temperature-detecting range in the vehicle causes temperature difference between the hot and cold junctions of the thermopile. The temperature difference causes thermo-electromotive force or

2

an electric potential difference from which the temperature of the temperature-detecting range is determined.

However, the sensor is affected by the cooled air, so that an uneven distribution of the temperature occurs in the can-like case. Due to the uneven distribution of the temperature in the can-like case, the temperature difference occurs. As a result, the air conditioning in the vehicle is disturbed.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an air conditioner for a vehicle that is capable of a stable air conditioning even when a driver or an occupant in a vehicle operates a switch on an instrument panel.

It is another object of the present invention to provide a temperature detector that has a non-contact temperature sensor, a temperature-sensing window of which is not easily soiled, and is capable of sensing the temperature around the driver and the occupant accurately.

It is still another object of the present invention to provide an air conditioner that controls air in a vehicle appropriately by through the use of a non-contact temperature sensor.

According to one aspect of the present invention, a vehicle air conditioner has a non-contact temperature sensor that is disposed on the instrument panel, above a switch for setting a temperature and an air volume inside a vehicle compartment.

If a hand of a driver or an occupant in a passenger seat of the vehicle covers a temperature-detecting range of the non-contact temperature sensor, the temperature sensor fails to detect the temperature of or around the driver and the occupants, disabling stable air conditioning. The non-contact temperature sensor of the air conditioner of the present invention is disposed above the switches for setting the temperature and air volume inside the vehicle compartment. Accordingly, a detecting range of the non-contact temperature sensor is prevented from interfering by hands of the driver or the occupant in the passenger seat even when he or she operates the switch for setting the temperature or the air volume at his or her option. Thus, the air conditioner is capable of stable air conditioning.

In addition, because the non-contact temperature sensor of the air conditioner of the present invention is fitted on the instrument panel of a vehicle, such instrument panels with non-contact temperature sensors can conveniently be delivered as a module to vehicle manufacturers, contributing to the reduction of their assembling costs. Besides, since the non-contact temperature sensor can be disposed near the microcomputer of the controller of the air conditioner, the connecting wire between them can be short. This increases a noise resistance of the temperature sensor, and the stability of air conditioning. This also contributes to cost reduction.

According to another aspect of the present invention, a vehicle air conditioner has an air-conditioning unit, a non-contact temperature sensor, and a control unit. The air-conditioning unit conditions the air inside a vehicle compartment, and the conditioned air is blown into the vehicle compartment through a blowout port. The non-contact temperature sensor detects the temperature within a temperature-detecting range. The control unit controls the temperature of the conditioned air in response to the detected temperature detected by the non-contact temperature sensor. The non-contact temperature sensor is disposed above the blowout port.

Because the non-contact temperature sensor is not affected with the conditioned air flowing out of the blowout

3

port, it is capable of measuring the temperature within the temperature-detecting range as accurate. Therefore, the air conditioner is capable of conditioning the air in the vehicle compartment desirably.

According to still another aspect of the present invention, a vehicle air conditioner has an air-conditioning unit, a non-contact temperature sensor, and a control unit. The air-conditioning unit conditions the air inside a vehicle compartment, and the conditioned air is blown into the vehicle compartment through a blowout port. The non-contact temperature sensor detects the temperature within a temperature-detecting range. The control unit controls the temperature of the conditioned air in response to the detected temperature detected by the non-contact temperature sensor. The non-contact temperature sensor is disposed at one side of the blowout port in a horizontal direction.

Accordingly, the non-contact temperature sensor is not affected with the conditioned air even when the conditioned air is blown sideways from the blowout port. Therefore, it is capable of measuring the temperature of the air within the temperature-detecting range as accurate. Thus, the air conditioner is capable of conditioning the air in the vehicle compartment desirably.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features and advantages of the present invention will become more apparent from the following detailed description made with reference to the accompanying drawings. In the drawings:

FIG. 1A is a perspective view of an instrument panel of a vehicle equipped with an automatic air conditioner according to a first embodiment of the present invention;

FIG. 1B is a front view of a control panel for the automatic air conditioner according to the first embodiment;

FIG. 2 is a schematic illustration of the whole configuration of the automatic air conditioner according to the first embodiment;

FIG. 3 is a front view of the instrument panel according to the first embodiment;

FIG. 4 is a flowchart of a control program carried out by an ECU of the air conditioner according to the first embodiment;

FIG. 5 is a characteristic graph showing a relation between a target blowout temperature (TAO) and a blower control voltage of the automatic air conditioner according to the first embodiment;

FIG. 6 is a characteristic graph showing a relation between the TAO and a blowout port mode of the automatic air conditioner according to the first embodiment;

FIG. 7 is an illustration of temperature detecting ranges of the infrared (IR) sensors disposed at a different position;

FIG. 8 is a flowchart of calculating the TAO according to the first embodiment;

FIG. 9 is a perspective view of an instrument panel of a vehicle equipped with an automatic air conditioner according to a second embodiment of the present invention;

FIG. 10 is a flowchart of calculating a TAO according to the second embodiment;

FIG. 11 is a perspective view of an instrument panel of a vehicle equipped with an automatic air conditioner according to a first modification of the present invention;

FIG. 12 is a front view of a control panel according to a second modification of the present invention;

FIG. 13 is a sectional view of the instrument panel around the IR sensor, and a front view of the IR sensor according to the first embodiment;

4

FIG. 14A is a sectional view of an instrument panel around another IR sensor, and a front view of the IR sensor according to a third embodiment of the present invention;

FIG. 14B is a perspective view of the instrument panel equipped with an automatic air conditioner according to the third embodiment;

FIG. 15 is a sectional view of an instrument panel around another IR sensor, and a front view of the IR sensor according to a fourth embodiment of the present invention;

FIG. 16 is a sectional view of an instrument panel around another IR sensor, and a front view of the IR sensor according to a fifth embodiment of the present invention;

FIG. 17 is a front view of an instrument panel of another modification of the present invention;

FIG. 18 is a sectional view of an instrument panel around a sensor according to a comparative example;

FIG. 19 is a schematic illustration of the whole configuration of an automatic air conditioner according to a sixth embodiment of the present invention;

FIG. 20 is a perspective view of an instrument panel equipped with an automatic air conditioner with an IR sensor according to the sixth embodiment;

FIG. 21 is a perspective view of a blowout port assembly, a sectional view of the blowout port assembly, and a front view of the IR sensor according to the sixth embodiment;

FIG. 22 is an illustration of a temperature detecting range of the IR sensor according to the sixth embodiment;

FIG. 23 is a flowchart of a control program carried out by an ECU according to the sixth embodiment;

FIG. 24 is a characteristic graph showing a relation between a TAO and a blower control voltage according to the sixth embodiment;

FIG. 25 is a characteristic graph showing a relation between the TAO and a suction mode according to the sixth embodiment;

FIG. 26 is a characteristic graph showing a relation between the TAO and a blowout port mode according to the sixth embodiment;

FIG. 27 shows an experimental result of the air conditioner according to the sixth embodiment;

FIG. 28 shows an experimental result of an air conditioner according to a related art;

FIG. 29 is a perspective view of an instrument panel equipped with an automatic air conditioner with another IR sensor according to a seventh embodiment of the present invention; and

FIG. 30 shows an experimental result of the air conditioner according to the seventh embodiment.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The preferred embodiments of the present invention will be explained with reference to the accompanying drawings. In the drawing, the same numerals are used for the same components and devices.

First Embodiment

An automatic air conditioner 100A according to a first embodiment of the present invention will be explained by referring to FIGS. 1A to 8. As shown in FIG. 1A, the automatic air conditioner 100A is provided in a vehicle. The air conditioner 100A conditions the air in a vehicle compartment of the vehicle. The vehicle has an engine for driving the vehicle.

5

As shown in FIG. 2, the automatic air conditioner 100A has an air conditioning unit 1 and an air conditioner electrical control unit (A/C ECU) 10. The ECU 10 controls actuators for the air conditioning unit 1.

The vehicle compartment has a driver side air conditioning zone and a passenger side air conditioning zone. The driver side air conditioning zone includes a rear seat on the right side of the vehicle. The passenger side air conditioning zone includes a rear seat on the left side of the vehicle. The air conditioning unit 1 controls a temperature of the air blowing to the vehicle compartment and a blowout port mode. The air conditioning unit 1 controls the temperature of the air and the blowout port mode of the driver side and passenger side of the conditioning zones separately.

The air conditioning unit 1 has an air duct 2 disposed at a front of the vehicle compartment. An inside/outside air switching door 3 and a blower 4 are provided upstream in the air duct 2. The inside/outside air switching door 3 is driven by an actuator, such as a servomotor 5, to change a suction port mode. That is, the inside/outside air switching door 3 changes an opening of an inside air suction port 6 and an external air suction port 7. Inside air is suctioned through the inside air suction port 6. Outside air is suctioned through the outside air suction port 7.

The blower 4 is a centrifugal fan, which is driven by a blower motor 9. The blower motor 9 is controlled by a blower driving circuit 8. The blower 4 generates an airflow, which flows toward the inside of the vehicle compartment, within the air duct 2.

An evaporator 41 is provided in the middle of the air duct 2 to cool the air flowing through the air duct 2. A heater core 42 is provided downstream of the evaporator 41. The heater 42 heats the air, with the heat of the cooling water of the engine, flowing through a first passage 11 and a second passage 12.

A part of the air duct 2 is divided by a partition 14 into a first passage 11 and a second passage 12. The evaporator 41 may be replaced by a Peltier element if the automatic air conditioner 100A is applied to electric vehicles.

A driver side air mix door 15 and a passenger side air mix door 16 are provided immediately upstream of the heater core 42. The air mix doors 15, 16 separately control the temperatures of the driver side air conditioning zone and the passenger side air conditioning zone, respectively.

The air mix doors 15, 16 are driven by their respective actuators, such as servomotors 17, 18. The air mix doors 15, 16 adjust the temperature of the conditioned air flowing toward the driver side air conditioning zone and the passenger side air conditioning zone, respectively. Especially, the conditioned air is flowed toward an inner surface of a windshield of the vehicle.

The evaporator 41 is a constituent part of a cooling cycle. The cooling cycle has a compressor (not shown), a condenser (not shown), a receiver (not shown), an expansion valve (not shown), and the evaporator 41. The compressor is driven by the engine of the vehicle to compress and discharge a coolant. The condenser condenses the coolant discharged from the compressor into a partially gaseous, partially liquid coolant. The receiver separates liquid coolant from the two-phase coolant. The expansion valve lets the liquid coolant expand adiabatically. The evaporator 41 lets the partially gaseous, partially liquid two-phase coolant evaporate.

The compressor is intermittently driven by an electromagnetic clutch (not shown), which is provided between the engine and the compressor and is controlled by the ECU 10.

6

When the clutch is turned on, the compressor starts. Then, the evaporator 41 cools and dehumidifies the air flowing through the air duct 2. Accordingly, the temperature in the vehicle compartment lowers, and mist, if any, on the inner surfaces of the windows is cleared.

The compressor is a variable-capacity compressor with an electromagnetic capacity-control valve. The valve regulates the capacity of the compressor according to a control signal that is generated based on the result of comparison between a target evaporator outlet temperature TEO behind the evaporator 41 and the air temperature TE measured by a post-evaporator air temperature sensor 74 disposed behind the evaporator 41.

A driver side defroster blowout port 20, a driver side center face blowout port 21, a side face blowout port 22 for the driver side, and a driver side foot blowout port 23 are provided downstream ends of each blowout duct. The blowout ducts are connected to the tail end of the first passage 11.

A passenger side defroster blowout port 30, a passenger side center face blowout port 31, a side face blowout port 32 for the passenger side, and a passenger side foot blowout port 33 are provided downstream ends of each blowout duct. The blowout ducts are connected to the tail end of the second passage 12.

The defroster blowout ports 20 and 30 blow conditioned air (mainly, hot air) to the windshield. The side face blowout ports 22 and 32 blow conditioned air (mainly, hot air) to the side windows.

Blowout port switching doors 24, 25, 26 are provided in the first passage 11 to change the blowout port mode for the driver side air conditioning zone. Blowout port switching doors 34, 35, 36 are provided in the second passage 12 to change the blowout port mode for the passenger side air conditioning zone.

The blowout port switching doors 24 to 26 and 34 to 36 are driven by actuators, such as servomotors 28, 29, 38, and 39. The blowout port switching doors 24 to 26 and 34 to 36 change the blowout port modes for the driver side and the passenger side, respectively.

The blowout port modes for each of the driver side and the passenger side include a FACE mode, a B/L mode, a FOOT mode, a F/D mode, a DEF mode, and other modes, respectively.

The blowout port switching doors 24 and 34 open and close the defroster blowout ports 20 and 30, respectively, separately.

The ECU 10 begins arithmetic processing and control processing when an ignition switch of the engine is turned on (IG ON) and a DC power is supplied from the battery (not shown) of the vehicle to the ECU 10.

The automatic air conditioner 100A is provided with a control panel 51, which is installed into an installation hole on the instrument panel 50 of the vehicle. Various signals are inputted from switches on the control panel 51 into the ECU 10.

As shown in FIG. 1B, the control panel 51 has a liquid crystal display (LCD) 52, a REC/FRS switch 53 for switching between the inside air and the outside air, a Fr DEF switch 54 for the front defroster, and a Rr DEF switch 55 for the rear defroster. The control panel 51 has a DUAL switch 56, a MODE switch 57 for the changeover of the blowout port mode, a blower switch 58 for changing the air volume, an A/C switch 59, an AUTO switch 60, and an OFF switch 61. The control panel 51 also has a DRIVER switch 62 for setting the temperature of the driver side of the vehicle

compartment, a PASSENGER switch **63** for setting the temperature of the passenger seat side of the vehicle compartment, and so on.

The DUAL switch **56** enables the temperature setting of the driver side and that of the passenger seat side separately from each other.

The Fr DEF switch **54** is to command whether to raise the demisting power or not and put the blowout port mode into the DEF mode.

The MODE switch **57** changes the blowout port mode among the FACE mode, the B/L mode, the FOOT mode, and the F/D mode in response to an operation of the driver and the passenger.

The LCD **52** has an area for indicating the set temperature of the driver side air conditioning zone and the passenger side air conditioning zone, an area for indicating the blowout port mode with an icon, an area for graphically indicating the air volume, and so on. The LCD **52** may also indicate an outside temperature outside the vehicle, the suction mode, time, and so on. Besides, the above switches may be replaced by touch switches arranged on the LCD **52**.

The A/C switch **59** turns on and off the cooling cycle (the compressor). When it is pushed to turn the compressor off, the cooling cycle is turned off and the engine gets rid of the air conditioning load. This increases a fuel efficiency of the vehicle. When the A/C switch **59** is once pushed, the cooling cycle is turned on and its LED **59a** turns on. When the A/C switch **59** is pushed again, the cooling cycle is turned off and its LED **59a** turns off.

When the blower switch **58** (the switch for changing the air volume) is put in an off state of the blower switch **58** or the OFF switch **61** is pushed, the A/C switch **59** and its LED **59a** go off to stop the compressor.

The DRIVER switch **62** has an up switch **62a** and a down switch **62b**. The DRIVER switch **62** sets the temperature of the driver side air conditioning zone at a desired level.

The PASSENGER switch **63** has an up switch **63a** and a down switch **63b**. The PASSENGER switch **63** sets the temperature of the passenger side air conditioning zone at a desired level.

The ECU **10** has a CPU, a memory **10a**, I/O ports, and so on. The memory **10a** has a ROM (EEPROM), and a RAM. Analog signals from various sensors are inputted into the ECU **10** through the I/O ports. The analog signals are converted into digital signals by an A/D converter, and inputted into the CPU. Specifically, a non-contact infrared temperature sensor (IR sensor) **70** and an outside air temperature sensor **72** are electrically connected to the ECU **10**. The IR sensor **70** senses the temperature of or around the driver and occupants. The outside air temperature sensor **72** senses the temperature outside the vehicle.

As shown in FIG. 1B, the IR sensor **70**, which also serves as a sensor for sensing the temperature inside the vehicle, is disposed on the instrument panel **50**. Specifically, the IR sensor **70** is disposed on ceiling side, namely, above the switches **62**, **63**, and **58** as described in detail later. There is a sign of "IR SENSOR" on a right side of the IR sensor **70** to indicate its existence.

As shown in FIG. 13, the IR sensor **70** of FIGS. 1 and 3 is put in a hole **705** made in a synthetic-resin facing plate **50a** of the instrument panel **50**. The IR sensor **70** has a synthetic-resin case **701**, a permeable film **702**, and an infrared-detecting element **703**. The permeable film **702** functions as a lens and filter. The permeable film **702** and the infrared-detecting element **703** are put in the inner space **706** of the synthetic-resin case **701**.

The front plate of the synthetic-resin case **701** has an oblique surface (slope) **704**, which has a truncated cone shape. The permeable film **702** is disposed at the bottom of a bowl-shaped front plate **704**. A symbol " θ " is the angle of the sensing range of the IR sensor **70**. The incident infrared rays from the surfaces of objects in the sensing range penetrate the permeable film **702** and reach the infrared-detecting element **703**.

Because of the truncated cone shape of the front plate **704**, a foreign material, such as dust, fallen on a bottom surface **704a** of the front plate **704** slides and falls off the front plate **704**. Thus, dust does not collect on the front plate **704** to block off the incident infrared rays.

Besides, because the IR sensor **70** is put in the inner part of the hole **705** of the synthetic-resin facing plate **50a** so that its angle θ of the sensing range is not disturbed, the driver and the occupants are effectively prevented from touching the permeable film **702**. Thus, the permeable film **702** is effectively prevented from being soiled.

Namely, with respect to the installation of the IR sensor **70**, the IR sensor **70** has at least the infrared-detecting element **703** and the permeable film **702**, and the permeable film **702** is put in the inner part of the hole **705**. The IR sensor **70** measures infrared rays from the occupants and windows in the vehicle compartment to measure surface temperatures of the objects in the vehicle compartment.

Because the IR sensor **70** is put in the inner part of the hole **705**, the IR sensor **70** is not soiled by fingers and so on. Because the front plate **704** of the hole **705** has the truncated cone shape, the foreign material slides and falls off the slope of the truncated cone shaped front plate **704**. Thus, foreign materials fallen on the bottom surface **704a** of the front plate **704** are not collected on it. It is desirable to form the front plate **704** in the truncated cone shape so that the angle of the temperature-detecting range θ can be secured.

Referring back to FIG. 2, the ECU **10** is also electrically connected to the post-evaporator air temperature sensor **74**, a water temperature sensor **75**, a hygrometric sensor **76**, and a vehicle speed sensor. The temperature sensor **74** detects the temperature of the air behind the evaporator **41**. The water temperature sensor **75** detects the temperature of cooling water of the engine. The hygrometric sensor **76** detects a relative humidity of the air in the vehicle compartment. The hygrometric sensor **76** is disposed in a recess portion. The recess portion is disposed in the instrument panel **50** in the vicinity of the driver seat. The vehicle speed sensor detects a speed of the vehicle.

The outside air temperature sensor **72**, the post-evaporator air temperature sensor **74**, and the water temperature sensor **75** are provided with temperature-detecting elements such as thermistors.

The ECU **10** is electrically connected to a pressure sensor **77**. The pressure sensor **77** detects a pressure of the coolant on the high-pressure side of the cooling cycle. The pressure sensor **77** is disposed between the receiver and the expansion valve.

Referring to FIGS. 4 to 8, the operation of the automatic air conditioner **100A** will be explained.

When the ignition switch of the engine is turned on, DC power is supplied to the ECU **10**. The CPU operates according to a control program as shown in FIG. 4 stored in the ROM.

In step S1 of FIG. 4, the RAM of the ECU **10**, which is a memory for data processing, is initialized.

In step S2, signals from the switches of the control panel **51** and data (detected values) are read into the RAM.

The data, read into the RAM, includes a post-evaporator air temperature value TE, a water temperature value TW, and an average value TIR (16).

An analog signal outputted from the temperature sensor 74 for sensing the temperature of air behind the evaporator 41 is converted into a digital signal with analog-to-digital (A/D) conversion. The digital signal is then converted into the post-evaporator air temperature value TE, which is stored in the RAM.

An analog signal outputted from the water temperature sensor 75 for sensing the temperature of cooling water of the engine is converted into a digital signal with A/D conversion. Then, the digital signal is converted into the water temperature value TW, which is stored in the RAM.

The average temperature TIR (16) around the driver and the occupants is calculated in Step S13 of FIG. 8.

A processing of steps S11 to S14 of FIG. 8 is carried out while the processing of Steps S1 to S10 of FIG. 4 is carried out.

In step S11 of FIG. 8, the value of temperature around the driver and the occupants detected by the IR sensor 70 is inputted into the RAM every 250 ms.

In step S12, the temperature values of step S11 are set as TIR (1).

In step S13, the average temperature value TIR (16) of 16 temperature values TIR is calculated.

In step S14, target blowout temperatures TAODr and TAOPa are calculated by using below equations #1 and #2. The TAODr is the target blowout temperature of the conditioned air blown into the driver side air conditioning zone. The TAOPa is the target blowout temperature of the conditioned air blown into the passenger side air conditioning zone.

$$TAODr = Kset \times TSETDr - KIR \times TIR(16) - Kam \times TAMdisp + C \quad (\#1)$$

$$TAOPa = Kset \times TSETPa - KIR \times TIR(16) - Kam \times TAMdisp + C \quad (\#2)$$

In the equations, "TSETDr" is the set temperature on the driver side air conditioning zone. "TSETPa" is the set temperature on the passenger seat side air conditioning zone. The coefficient for set temperature "Kset" is 7.0. The coefficient for IR "KIR" is 5.1. "TIR" (° C.) is the detected value by the IR sensor. The coefficient for air temperature outside the vehicle "Kam" is 1.0. "TAMdisp" (° C.) is the air temperature outside the vehicle. The correction constant "C" is -45.

Referring back to FIG. 4, in step S3, the target blowout temperatures TAODr and TAOPa calculated in step S14 of FIG. 8 are stored in the RAM.

In step S4, a blower rate (air volume per unit time) of the blower 4 (the blower control voltages VADr and VAPa to be applied to the motor 9 of the blower 4) are calculated based on the TAODr and TAOPa.

More specifically, the blower control voltage VA to be applied to the motor 9 of the blower 4 is calculated as follows.

The blower control voltages VADr and VAPa corresponding to TAODr and TAOPa are determined based on the characteristic graph of FIG. 5. Then, the blower control voltages VADr and VAPa are averaged.

In step S5, an opening degree SWDr (%) of the driver side air mix door 15, and an opening degree SWPa (%) of the

passenger side air mix door 16 are calculated by using the equations #3 and #4,

$$SWDr = \{TAODr - TE\} \times \{100 / (TW - TE)\} \quad (\#3)$$

$$SWPa = \{TAOPa - TE\} \times \{100 / (TW - TE)\} \quad (\#4)$$

where TAODr is the target blowout temperature on the driver side air conditioning zone, TAOPa is the target blowout temperature on the passenger side air conditioning zone, TE is the post-evaporator air temperature value detected by the post-evaporator air temperature sensor 74 for sensing the temperature of air behind the evaporator 41, and TW is the water temperature value detected by the water temperature sensor 75 for sensing the temperature of cooling water of the engine.

In step S6, a target discharge rate of the compressor is determined by a feedback control (PI control) so that post-evaporator air temperature TE is equal to the target evaporator outlet temperature TEO behind the evaporator 41.

More specifically, a solenoid current (control current I_n), which is the target value of a control current to be supplied to the solenoid of a capacity-control solenoid valve installed on the compressor, is calculated by using the equations #5 and #6.

$$E_n = TE - TEO \quad (\#5)$$

$$I_n = I_{n-1} - Kp \{ (E_n - E_{n-1}) + (\theta / Ti) \times E_n \} \quad (\#6)$$

where TE is the actual post-evaporator air temperature detected by the post-evaporator air temperature 74, TEO is the target evaporator outlet temperature, Kp is a proportional constant (for example, 0.03), θ is a sampling time (for example, one second), Ti is an integration constant (for example, 1000), E_n is a temperature deviation (° C.) of this time, E_{n-1} is a temperature deviation (° C.) of a previous time, I_n is a control current (A) of this time, I_{n-1} is a control current (A) of the previous time.

In step S7, control signals are outputted to the blower driving circuit 8 to accomplish blower control voltages VADr and VAPa of step S4. In Step S8, control signals are outputted to the servomotors 17 and 18 to accomplish the opening degrees SWDr and SWPa of step S5.

In step S9, blowout port modes corresponding to TAODr and TAOPa are chosen based on the characteristic graph of FIG. 6 and outputted to the actuators 28, 29, 38, and 39.

In step S10, the solenoid current I_n determined in Step S6 is outputted to the solenoid of the capacity-control solenoid valve installed on the compressor and the processing returns to step S2.

The advantages of the automatic air conditioner 100A of the present invention are now described.

(1) The IR sensor 70 is disposed above the DRIVER switch 62, the PASSENGER switch 63, and the blower switch 58 on the instrument panel 150.

Accordingly, when the driver or the occupant in the passenger seat operates the DRIVER switch 62 or the PASSENGER switch 63, his or her hand does not interfere with a temperature-detecting range 70a of the IR sensor 70 (see FIG. 7).

Therefore, the IR sensor 70 is capable of detecting the temperature of or around the driver and the occupants accurately, causing no air-volume hunting and enabling comfortable air conditioning.

(2) There is a sign of "IR SENSOR" on one side of the IR sensor 70 to indicate its existence.

Accordingly, the driver and the occupant in the passenger seat are warned not to interfere with the temperature-

11

detecting range **70a** during operating the DRIVER switch **62**, the PASSENGER switch **63**, and the blower switch **58**. Therefore, their hands are prevented without fail from interfering with the temperature-detecting range **70a**.

(3) Because the IR sensor **70** is fitted on the instrument panel **50**, the instrument panel **50** with the IR sensor **70** can conveniently be delivered as a module to vehicle manufacturers, contributing to the reduction of their assembling costs. Besides, the IR sensor **70** is disposed near the micro-computer, the connecting wire between them is short, which increases the noise resistance of the sensor and, hence, the stability of air-conditioning and contributes to cost reduction.

Second Embodiment

Referring to FIGS. **9** and **10**, the automatic air conditioner **100B** for vehicles of the second embodiment of the present invention is now described.

The basic configuration of the automatic air conditioner **100B** is the same as that of the automatic air conditioner **100A**. The control panel of the automatic air conditioner **100B** is disposed in an armrest **81**.

In the present embodiment, another control panel **80** is installed on the instrument panel **50**. The control panel **80** has audio switches **82** and navigation switches **83** for an audio and navigation system **84**. As described above, the switches for the air conditioning such as temperature-setting switches and an air volume-setting switch are disposed in the armrest **81** of the control panel **80**.

The IR sensor **70** is disposed on the instrument panel **50**, above the audio and navigation switches **82** and **83**.

Referring to FIGS. **4** and **10**, the operation of the automatic air conditioner **100B** of the present embodiment is now described.

As shown in FIG. **4**, when the ignition switch of the engine is turned on, DC power is supplied to the ECU **10**. The CPU operates according to the control program (the flowchart of FIG. **4**) stored in the ROM.

In step **S1** of FIG. **4**, the RAM of the ECU **10**, which is a memory for data processing, is initialized.

In step **S2**, signals from the switches for air conditioning and data (detected values) described below are read into the RAM.

The data, read into the RAM, includes the post-evaporator air temperature value **TE**, the water temperature value **TW**, and the average value **TIR** (16).

An analog signal outputted from the temperature sensor **74** for sensing the temperature of air behind the evaporator **41** is converted into a digital signal with the A/D conversion. The digital signal is then converted into the post-evaporator air temperature value **TE**, which is then stored in the RAM.

An analog signal outputted from the water temperature sensor **75** for sensing the temperature of the cooling water of the engine is converted into a digital signal with A/D conversion. Then, the digital signal is converted into the temperature value **TW**, which is then stored in the RAM.

The average temperature **TIR** (16) around the driver and the occupants calculated in step **ST5** of a flowchart in FIG. **10** is stored in the RAM.

A processing of steps **ST1** to **ST6** of FIG. **10** is carried out while the processing of steps **S1** to **S10** of FIG. **4** is carried out.

In step **ST1** of FIG. **10**, it is determined whether it is within five seconds from a detection of operation any of the audio and navigation switches **82** and **83**. If it is not within five seconds of said detection of switch operation (NO), the

12

processing advances to step **ST2**. If it is within five seconds of said detection of switch operation (NO), the processing advances to step **ST4**.

In step **ST2**, the value of temperature around the driver and the occupants detected by the IR sensor **70** is inputted into the RAM every 250 ms.

In step **ST3**, temperature values around the driver and the occupants are designated as **TIR** (1).

In step **ST4**, the temperature detected by the IR sensor **70** ten seconds before said detection of switch operation is retrieved from the RAM and designated as **TIR** (1). **TIR** (2) is the value detected by the IR sensor **70** ten seconds minus 250 ms before said detection of switch operation. **TIR** (3) is the value detected by the IR sensor **70** ten seconds minus 500 ms before said detection of switch operation.

In step **ST5**, the average temperature value **TIR** of 16 temperature values **TIR** at intervals of 250 ms is calculated as **TIR** (16).

In step **ST6**, the target blowout temperatures **TAODr** and **TAOPa** are calculated by using below equations #7 and #8. The **TAODr** is the target blowout temperature of the conditioned air blown into the driver side air conditioning zone. The **TAOPa** is the target blowout temperature of the conditioned air blown into the passenger side air conditioning zone.

$$TAODr = Kset \times TSETDr - KIR \times TIR(16) - Kam \times TAM - disp + C \quad (\#7)$$

$$TAOPa = Kset \times TSETPa - KIR \times TIR(16) - Kam \times TAM - disp + C \quad (\#8)$$

In the equations, "TSETDr" is the set temperature on the driver side air conditioning zone. "TSETPa" is the set temperature on the passenger seat side air conditioning zone. The coefficient for set temperature "Kset" is 7.0. The coefficient for IR "KIR" is 5.1. "TIR" (° C.) is the detected value by the IR sensor. The coefficient for air temperature outside the vehicle "Kam" is 1.0. "TAMdisp" (° C.) is the air temperature outside the vehicle. The correction constant "C" is -45.

Referring back to FIG. **4**, in step **S3**, the target blowout temperatures **TAODr** and **TAOPa** calculated in step **ST6** of FIG. **10** are stored in the RAM.

The processing in steps **S4** to **S10** of FIG. **4** in the case of the automatic air conditioner **100B** is the same as the processing in steps **S4** to **S10** of FIG. **4** in the case of the automatic air conditioner **100A**.

The automatic air conditioner **100B** has not only the third advantages described in the first embodiment but also the following advantage.

(4) The IR sensor **70** is disposed on the instrument panel **50**, which includes the audio and navigation switches **82** and **83**. Accordingly, the driver and the occupant in the passenger seat can operate the audio and navigation switches **82** and **83** without interfering with the detecting range of the IR sensor **70**. Therefore, the IR sensor **70** is capable of detecting the temperature of or around the driver and the occupants accurately, causing no air-volume hunting and enabling comfortable air conditioning.

Third Embodiment

Referring to FIGS. **2**, **4**, **8**, **14A** and **14B**, a temperature detector **70E** for the automatic air conditioner **100D** according to the third embodiment of the present invention is now described.

13

The automatic air conditioner 100D of the present embodiment shown in FIG. 14B has the same configuration as the automatic air conditioner 100A of the first embodiment (see FIG. 2) except that the control panel 51 is replaced by an LCD (liquid crystal display) control panel 85 with touch switches. The LCD control panel 85 is used for the operation of not only the automatic air conditioner 100D but also audio and navigation systems.

The ECU 10 of the automatic air conditioner 100D calculates the target blowout temperatures TAODr and TAOPa based on the temperature around the driver and the occupants detected by the temperature detector 70E (see FIG. 8). The ECU 10 controls the air-conditioning actuators based on the target blowout temperatures TAODr and TAOPa (see FIG. 4).

As shown in FIG. 14A, the temperature detector 70E has a cover (made of zinc alloy) 91 and a non-contact temperature sensor 92. The temperature detector 70E is disposed in a hole 86, which is provided in a plastic facing plate 50b of the instrument panel 50 of the vehicle. The hole 86 is positioned above the LCD control panel 85, a little off the centerline of the vehicle compartment toward the passenger seat. The hole 86 is a through hole with rectangular openings.

The cover 91 is in the shape of a block and has a truncated cone shape recess 90 in its front and another recess 90b in its back. The recesses 90 and 90b communicates with each other. The non-contact temperature sensor 92 is disposed in the back recess 90b.

The facing plate 50b is a part of the instrument panel 50 (made of ABS plastic). The facing plate 50b is fitted into an opening 50c, which is provided in the instrument panel 50.

The non-contact temperature sensor 92 has a plastic case 93, a temperature-sensing window 94, and an IR sensor element 95. The temperature-sensing window 94 is made in the front of the case 93 and provided with silicon lens with a germanium coat that functions as a filter. The IR sensor element 95 including a thermocouple is disposed in the inner part of the case 93. The case 93 is filled with an inert gas (nitrogen) 96.

The front recess 90 has a truncated cone shape. The truncated cone shape front recess 90 is opened toward the driver and the occupants. A bottom surface 90a in a front surface of the recess 90 slopes down. The temperature-sensing window 94 is positioned at the bottom of the front recess 90. Thus, the angle θ of detecting range of 90° is secured.

The automatic air conditioner 100D of the third embodiment has the following advantages.

(5) Because the temperature detector 70E is disposed above the LCD control panel 85 for the operation of the automatic air conditioner 100D, the audio, and navigation systems. As a result, the hand of the driver or the occupant in the passenger seat having access to the LCD control panel 85 does not interfere with the detecting range of the temperature detector 70E.

Therefore, the temperature detector 70E is capable of detecting the temperature of or around the driver and the occupants accurately, causing no air-volume hunting and enabling comfortable air conditioning.

(6) Because the temperature-sensing window 94 of the non-contact temperature sensor 92 is disposed at the bottom of the truncated cone shape recess 90, the fingers and other parts of the driver and the occupants are prevented from touching the temperature-sensing window 94. As a result, the temperature-sensing window 94 is not easily soiled by oil and dirt of the fingers. Accordingly, the temperature

14

detector 70E is capable of detecting the temperature of or around the driver and the occupants as accurate.

On the other hand, in case that the temperature detector 70X does not have the truncated cone shape front recess as shown in FIG. 18, the fingers of the driver and the occupant in the passenger seat easily touch the lens surface 901. Hence, the lens surface 901 is liable to be soiled by oil and dirt of the finger. The lens surface 901 is liable to be smeared by detergent for the cleaning of the interior of the vehicle compartment including the instrument panel, too. If the lens surface 901 is soiled, the accuracy of the temperature detector 70X is reduced.

(7) Because the front recess 90 of the cover 91 is in the shape of the truncated cone and its bottom surface slopes down toward the vehicle compartment, dust entered the truncated cone shape front recess 90 slides on and falls off its slope of the bottom surface 90a without collecting in it. Thus, the temperature-detection by the temperature detector 70E is not disturbed with such dust.

On the other hand, as in the case of the temperature detector 70X, which does not have a bottom surface sloping down toward the vehicle compartment as shown in FIG. 18, dust collects easily in the cylindrical recess 902.

(8) Because the front recess 90 of the cover 91 is in the shape of a truncated cone that is opened toward the driver and the occupants, the angle θ of the detecting range of the non-contact temperature sensor 92 is as large as 90°. Further, since the recess 90 is opened toward the driver and the occupants in the vehicle compartment, the temperature detector is capable of detecting the temperature of or around the driver and the occupants accurately.

(9) Because the temperature-sensing window 94 is disposed at the bottom of the truncated cone shape front recess 90 and the non-contact temperature sensor 92 is put in the back recess 90b, the IR sensor element 95 requires no means (such as coating) for shutting out infrared rays other than incident infrared rays through the temperature-sensing window 94. This enables the reduction of production cost of the temperature detector 70E.

(10) Heat, around the driver and the occupant, is collected by the silicon lens of the temperature-sensing window 94. The heat is efficiently sent to the IR sensor element 95. Besides, the germanium coat on the lens of the temperature-sensing window 94 cuts out heat and light rays of a certain wavelength range, which are detrimental to the IR sensor element 95.

(11) Because the truncated cone shape front recess 90 in front of the cover 91 can be produced in advance, it can be made easily. Besides, because the truncated cone shape recess 90 is made in the cover 91 of the temperature detector 70E, the temperature detector 70E can be easily installed by just fitting the non-contact temperature sensor 92 into the back recess 90b of the cover 91.

Fourth Embodiment

Referring to FIG. 15, the temperature detector 70F of the fourth embodiment of the present invention is now described.

The temperature detector 70F has a cover (made of zinc alloy) 91 having a truncated cone shape recess 90 in its front, and a non-contact temperature sensor 92. The detector 70F is put in a hole 87, which is provided in a facing plate 50b of the instrument panel of a vehicle. The non-contact temperature sensor 92 of the temperature detector 70F has the same construction as the non-contact temperature sensor 92 of the temperature detector 70E.

15

The cover **91** is in the shape of a block and has a truncated cone shape recess **90** in its front and another recess **90b** in its back. The recesses **90** and **90b** communicates with each other. The non-contact temperature sensor **92** is put in the back recess **90b**. Protrusions **97** are formed on the top, bottom, and right and left sides of the cover **91**.

The plastic facing plate **50b** is fitted into an opening **50c** provided in the instrument panel **50** as shown in FIG. 14B. The hole **87** is formed in the plastic facing plate **50b** and has a cylindrical shape, which is rectangular in cross section and has a certain depth.

Recesses for locking (not shown) are made inside the hole **87** to engage with the protrusions **97** and fix the non-contact temperature sensor **92** inside the hole **87**. The non-contact temperature sensor **92** is positioned in the hole **87** so that the front end **98** of the cover **91** is flush with the front surface of the plastic facing plate **50b**.

The front recess **90** is in the shape of a truncated cone. The front recess **90** is opened toward the driver and the occupants and its bottom surface slopes down toward the vehicle compartment. The non-contact temperature sensor **92** is positioned in the back recess **90b** and surrounded by the cover **91** so that the temperature-sensing window **94** comes to the bottom of the front recess **90**. Thus, the angle θ of detecting range of 90° of the temperature detector **70F** is secured.

The temperature detector **70F** of the fourth embodiment has the following advantage in addition to the advantages of the foregoing embodiments of the present invention.

(12) Because the cover **91** has the protrusions **97** formed on the top, bottom, and right and left sides of the cover **91**, and the hole **87** has the recesses to engage with the protrusions **97**, the non-contact temperature sensor **92** is fixed in the hole **87** just by pushing the former into the latter.

Fifth Embodiment

Referring to FIG. 16, the temperature detector **70G** of the fifth embodiment of the present invention is now described.

The temperature detector **70G** includes a cover (made of zinc alloy) **91** having a recess **90** formed on its front, and a non-contact temperature sensor **92**. The temperature detector **70G** is put in the hole **87**, which is provided in the plastic facing plate **50b** of the instrument panel **50** of the vehicle. The non-contact temperature sensor **92** of the temperature detector **70G** has the same construction as the non-contact temperature sensor **92** of the temperature detector **70E** as shown in FIG. 14.

The cover **91** is in the shape of a block, and has a pyramidal recess **90** in its front and another recess **90b** in its back. The recesses **90** and **90b** communicates with each other. The non-contact temperature sensor **92** is put in the back recess **90b**. Protrusions **97** are also formed on the top, bottom, and right and left sides of the cover **91**.

The hole **87** is rectangular in cross section and has a certain depth. Recesses (not shown) are made inside the hole **87** to engage with the protrusions **97** and fix the non-contact temperature sensor **92** inside the hole **87**. The non-contact temperature sensor **92** is positioned in the hole **87** so that the front end **98** of the cover **91** is flush with the front surface of the plastic facing plate **50b**.

The plastic facing plate **50b** is fitted into the opening **50c** made in the instrument panel **50** (see FIG. 14B) to be integral with the instrument panel **50**. The hole **87** is positioned in a certain place on the facing plate **50b**.

The front recess **90** has a pyramidal shape. The pyramidal front recess **90** is opened toward the driver and the occu-

16

pants. Its bottom surface slopes down. The non-contact temperature sensor **92** is positioned in the back recess **90b** that is surrounded by the cover **91** so that the temperature-sensing window **94** comes to the bottom of the pyramidal front recess **90**. Thus, the angle θ of detecting range of 90° of the temperature detector **70G** is secured.

The temperature detector **70G** of the present embodiment has the following advantage in addition to the advantages of the foregoing embodiments of the present invention.

(13) Because of the pyramidal front recess **90** of the temperature detector **70G**, the range of detecting the temperature of or around the driver and the occupants is square.

The present invention includes modifications other than the embodiments described above.

(i) As shown in FIG. 11, the IR sensor **70** may be disposed on the instrument panel **50**, off the centerline of the vehicle compartment to the passenger seat.

In such an automatic air conditioner **100C** of this first modification, when the driver operates the audio switches, the navigation switches, or the switches for adjusting the air volume and the temperature, he or she can avoid interfering with the detecting range of the IR sensor **70**. Besides, the influence of the operation of the steering wheel can be avoided.

Accordingly, the IR sensor **70** is capable of accurately detecting the temperature of or around the driver and the occupants, thereby enabling comfortable air conditioning.

(ii) Such configuration may be adopted as the temperature values detected by the IR sensor **70** at the present point in time or at a point in time preceding, by a certain time, the detection of the operation of one of the audio switches **82**, the navigation switches **83**, the blower switch **58**, the DRIVER switch **62**, and the PASSENGER switch **63** are maintained.

(iii) As shown in FIG. 12, the temperature detected by the IR Sensor **70** and the air temperature outside the vehicle may be indicated on the LCD **52**.

(iv) The truncated cone shape or pyramidal recess **90** for the non-contact temperature sensor **92** of the third, fourth, and fifth embodiments may be formed in a certain component, design, or pattern.

For example, as shown in FIG. 17, the recess **90** may be formed in a letter **99**. In such a case, the driver and the occupants recognize the recess **90** as a part of the letter **99** instead of recognizing the recess **90** as a recess. Thus, the interior looks more attractive.

(v) The recess **90** may be formed directly in the instrument panel **50** or a plastic facing plate **50b**.

Sixth Embodiment

As shown in FIG. 19, the automatic air conditioner **100** for vehicles of the present embodiment has an air conditioning unit **151** disposed in an air duct **105**, which is disposed in front of the vehicle compartment **103**. The air conditioning unit **151** has a suction mode switching damper **107** for the changeover between the inside air and the outside air, a blower **109**, an evaporator (heat exchanger for cooling) **111**, an air-mixing damper **113**, a heater core (heat exchanger for heating) **115**, and a blowout port switching damper **117** for changeover between blowout ports.

When the suction mode switching damper **107** is turned to its first position (shown in a solid line in FIG. 19) by a servomotor **119**, it lets the air outside the vehicle flow into the air duct **105** through an outside-air intake port **105a**. When the suction mode switching damper **107** is turned to its second position (shown in a broken line in FIG. 19) by

17

the servomotor **119**, it lets the air inside the vehicle compartment **103** (inside air) flow into the air duct **105** through an inside-air intake port **105b**.

The blower **109** feeds the outside air taken in through the outside-air intake port **105a** or the inside air taken in through the inside-air intake port **105b** to the evaporator **111** according to the rotational speed of a blower motor **123**, which is driven by a driving circuit **121**. The evaporator **111** cools down the air fed from the blower **109** with a coolant circulated by the action of the cooling cycle of the automatic air conditioner **100**.

The driving circuit **121** and the blower motor **123** make up a means for regulating the air volume of conditioned air into the vehicle compartment **103**.

Then, the air-mixing damper **113** is directly driven by a servomotor **125**. According to its opening degree, part of the cooled air from the evaporator **111** flows through the heater core **115**, and the remaining cooled air flows toward the blowout port switching damper **117** by bypassing the heater core **115**.

The air-mixing damper **113** and the servomotor **125** are included in means for regulating the temperature of conditioned air to be fed to the vehicle compartment **103**.

When the automatic air conditioner **100** is put in its face mode, the damper **117** driven by a servomotor **127** is put in the first position (indicated as "d1" in FIG. **19**) and lets the conditioned air flow through a face blowout port **105c** of the air duct **105** toward the upper parts of bodies of the driver and the occupants in the vehicle compartment **103**. The face blowout port **105c** is formed in the facing plate **550** of a blowout port assembly **150** to be described later (see FIG. **20**).

When the automatic air conditioner **100** is put in its foot mode, the damper **117** is put in the second position (indicated as "d2" in FIG. **19**) and lets the conditioned air flow through a foot blowout port **105d** of the air duct **105** toward the lower parts of bodies of the driver and the occupants in the vehicle compartment **103**. When the automatic air conditioner **100** is put in its bi-level mode, the damper **117** is put in the third position (indicated as "d3" in FIG. **19**) and lets the conditioned air flow through both the blowout ports **105c** and **105d** toward the bodies of the driver and the occupants.

The servomotor **119** to drive the damper **107**, the driving circuit **121** to drive the blower **109**, the servomotor **125** to drive the air-mixing damper **113**, and the servomotor **127** to drive the damper **117** are controlled by an electrical control unit (ECU) **130**.

The ECU **130** reads signals from a various elements, such as a non-contact infrared temperature sensor (hereinafter "IR sensor") **131**, a water-temperature sensor **132**, a post-evaporator air temperature sensor **133**, an air-mix (A/M) opening-degree sensor **134**, and a temperature-setting switch **135**. The ECU **130** reads the signals via an A/D converter **130e**. The IR sensor **131** detects a surface temperature T_{ir} of a detecting range in the vehicle compartment **103**. The water-temperature sensor **132** detects a temperature T_w of cooling water of the engine. The post-evaporator air temperature sensor **133** detects a temperature T_e of the cooled air behind the evaporator **111**. The A/M opening-degree sensor **134**, which is built in the servomotor **125**, detects an opening degree θ of the air-mixing damper **113**. The temperature-setting switch **135** is used for setting the target in-vehicle compartment temperature T_{set} at a desired level. The switch **135** is operated by the driver or the occupant in the passenger seat. The ECU **130** is also connected to a display **152**.

As shown in FIG. **20**, an LCD control panel **160** with touch switches is provided. The LCD control panel **160** is a

18

kind of a display. The LCD control panel is used for operating the automatic air conditioner **100**, an audio, and a navigation system. The face blowout port **105c** is disposed closer to the ceiling of the vehicle above the LCD control panel **160**. The IR (infrared ray) sensor **131** is disposed above the face blowout port **105c**. Accordingly, when the driver or the occupant in the passenger seat operates the touch switches on the LCD control panel **160**, his or her hand or arm does not cover the IR sensor **131** inadvertently to disenable the IR sensor **131**. Although it is preferable to dispose the IR sensor **131** above all the touch switches of the LCD control panel **160**, the IR sensor **131** may be disposed above one of the touch switches.

Alternatively, the temperature-setting switch **135** may be of a type for the driver or the occupant in the passenger seat to input his or her feeling of heat or cold. In such a case, the ECU **130** determines the target in-vehicle compartment temperature T_{set} according to the input of the feeling of heat or cold.

Referring back to FIG. **19**, the ECU **130** controls the automatic air conditioner **100** based on the above signals. The ECU **130** has a central processing unit (CPU) **130a**, a ROM **130b**, an output unit **130c**, and a quartz resonator **130d**. The CPU **130a** receives the above signals through the A/D converter **130e** to calculate amounts of manipulation of the above relevant devices, such as the driving circuit **121** and the servomotors **119**, **123**, **125**, **127**. The ROM **130b** stores execution instructions of a flowchart to be described later. The output unit **130c** outputs control signals corresponding to the amounts of manipulation calculated by the CPU **130a** to the above relevant devices. The quartz resonator **130d** sends out reference oscillation of several megahertz to make the CPU **130a** do digital arithmetic processing of software.

When the ignition switch "IG" of the engine is turned on, the battery "BAT" of the vehicle begins to supply power to the ECU **130**. Then, the ECU **130** begins to control air conditioning when an on/off switch **136** is turned on. The on/off switch **136** is used for turning on and off the automatic air conditioner **100**.

The IR sensor **131** is now described in detail. The IR sensor **131** of the present embodiment is a non-contact temperature sensor to detect the temperature of a detecting range in the vehicle compartment. More specifically, the IR sensor **131** is an infrared sensor with a thermopile-type detecting element, which generates thermoelectromotive force in proportion in response to the intensity of incident infrared rays.

Referring back to FIG. **20**, the IR sensor **131** is built in the blowout-port assembly **150**, which is disposed in the middle of the instrument panel "IS".

Specifically, as shown in FIG. **21**, the IR sensor **131** is positioned above the face blowout ports **105c** of the blowout-port assembly **150** and embedded, or sunk, in the facing plate **550**. More specifically, the IR sensor **131** is put in a recess **501** made in the instrument panel **Is** together with a cover **500**. The cover **500** has a truncated cone shape recess **500a**, and it is molded to cover a case **510** of the IR sensor **131**.

The IR sensor **131** has the block-like cover **500**, the case **510**, and a thermocouple unit (detecting element) **520**. The case **510** houses the thermocouple unit **520**, and has a window **530b**. The thermocouple unit **520** has a square shape when viewed from the front. The recess **500a** is formed in the front of the block-like cover **500** to face toward the in-vehicle compartment. The recess **500** has a bottom surface **500b** that slopes down toward the in-vehicle

19

compartment. Another recess is also formed in the back. The bottom of the truncated cone shape front recess **500a** is open to the back recess. Thus, the truncated cone shape front recess **500a** and the back recess communicate with each other through the window **530b**. The thermocouple unit **520** is disposed in the inner part of the case **510**, which is put in the back recess of the block-like cover **500**. The thermocouple unit **520** generates thermoelectromotive force corresponding to the temperature difference between its hot and cold junctions.

The case **510** has a window **530b** overlapping the open bottom of the truncated cone shape front recess **500a** of the block-like cover **500**. The truncated cone shape front recess **500a** is directed to the temperature-detecting range in the vehicle compartment. Thus, the window **530b** of the case **510** is directed to the temperature-detecting range in the vehicle compartment through the truncated cone shape front recess **500a**.

The window **530b** of the case **510** is fitted with a lens **530a**, through which incident infrared rays pass. The infrared rays passing through the lens **530a** are converted into heat by infrared-absorbing film (not shown). The heat causes temperature difference between the hot and cold junctions of the thermocouple unit **520**.

By determining the size of the thermocouple unit **520**, the size of the window **530b** of the case **510**, and the distance between the thermocouple unit **520** and the window **530b** appropriately, an appropriate angle “ θ ” of temperature-detecting range can be achieved. The height of the IR sensor **131** is generally the same as the height of the abdomen or the chest of the driver. The reference letter “S” of FIG. **21** is a front view of the truncated cone shape front recess **500a** of the IR sensor **131** and the lens **530a**. The display **152** is provided on the blowout port assembly to indicate the detected value of the IR sensor **131** and so on.

FIG. **22** shows the detecting range **140A** of the IR sensor **131**. The IR sensor **131** is directed to the driver **142**, off the centerline of the vehicle compartment and a little up off the horizon. The angle “ θ ” of the detecting range of the IR sensor **131** is determined appropriately to detect the temperature of surfaces of objects in the detecting range **140A** shown by the dotted line.

The detecting range **140A** covers the upper half of the body **142a** of the driver **142** (the part covered with the clothes), the head **142b** of the driver, part of the ceiling **143**, part of the side window **144a** of the door **144** beside the driver, and part of the rear window **145**. In FIG. **22**, the reference numerals **146** and **147** are the driver’s seat and the rear seat, respectively.

Because the ceiling **143** is not exposed to sunlight and is provided with an insulating material, its temperature generally follows the air temperature in the vehicle compartment. The glass temperature of the side window **144a** and the rear window **145** are changed under the influence of the inside and outside air temperature. The surface temperature of the upper half of the driver’s body **142a** is changed under the influence of sunlight. As a result, the IR sensor **131** measures the temperature of the detecting range **140A** based on the inside and outside air temperatures and environmental data including the intensity of sunshine.

Besides, because the temperature of the driver’s and rear seats **146** and **147** are also changed under the influence of sunlight, the seats **146** and **147** may be included in the detecting range **140A**.

Referring to the flowchart of FIG. **23**, the operation of the automatic air conditioner **100** of the present embodiment is now described. The flowchart shows the control process that

20

is carried out by the ECU **130**. The ECU **130** executes a control program stored in the ROM **130b** according to the flowchart of FIG. **23**.

In step **S100**, counters, flags are initialized. The counters and the flags are used in the processing. Then, in step **S110**, the set temperature T_{set} inputted through the temperature-setting switch **135** is read into the CPU **130a**. In step **S120**, the temperature T_{ir} detected by the IR sensor **131** and the signals of the sensors **132** to **134** are read into the CPU **130a**. In this embodiment, steps **S110** and **S120** are included in means for inputting detected signals.

In next step **S130**, a target blowout temperature (hereinafter, “TAO”) is calculated based on the set temperature T_{set} and the temperature T_{ir} read in step **S120** by using the equation (#9), which is stored in the ROM **130b** in advance.

$$TAO = K_{set} \times T_{set} - K_{ir} \times T_{ir} + C \quad (\#9)$$

where “ K_{set} ” and “ K_{ir} ” are coefficients, and “ C ” is a constant.

In step **S140**, the voltage to be applied to the blower motor **123** (blower voltage) corresponding to the target air volume is determined based on the TAO acquired in step **S130** and the characteristic graph of FIG. **24** stored in the ROM **130b**.

In step **S150**, the target opening degree θ_0 of the air-mixing damper **113** is calculated from the TAO acquired in step **S130** and the temperature of cooling water of the engine T_w and the air temperature T_e behind the evaporator **111** both acquired in step **S120** by using the equation (#10).

$$\theta_0 = \{(TAO - T_e) / (T_w - T_e)\} \times 100 \text{ (\%)} \quad (\#10)$$

In step **S160**, it is determined a suction mode whether inside air, outside air, or both (semi-inside air) is sucked based on the target blowout temperature TAO and the characteristic graph of FIG. **25** stored in the ROM **130b**.

In step **S170**, a blowout port mode is chosen from among a face mode (FACE), a bi-level mode (B/L) and a foot mode (FOOT) based on the TAO and the characteristic graph of FIG. **26** stored in the ROM **130b**.

In step **S180**, according to calculated results in the above steps **S140** to **S170**, control signals for the blower voltage, the opening degree of the air-mixing damper, the inside/outside air suction mode and the blowout port mode are outputted to the driving circuit **121**, the servomotor **125**, the servomotor **119**, and a servomotor **127**, respectively.

Then, the process advances to step **S190**. In step **S190**, it is determined whether a t-second period has passed or not. When it is determined to “NO”, the process stays in step **S190**. When it is determined to “YES”, the process returns to step **S110**.

As the air conditioning process is conducted in such a way, when the blower **109** feeds the outside air taken in through the outside-air intake port **105a** or the inside air taken in through the inside-air intake port **105b** to the evaporator **111** in the air duct **105**, the evaporator **111** cools down the air fed from the blower **109**.

An air-mixing damper **113** allows part of the cooled air from the evaporator **111** to flow into the heater core **115**, and the remaining cooled air to bypass the heater core **115**.

Then, the cooled air bypassing the heater core **115** and the air flowing into the heater core **115** are mixed at upstream of the blowout port switching damper **117**. Further, corresponding to the switching position of the damper **117**, the mixed air flows into one of the foot blowout ports **105d** and the face blowout port **105c**.

Thus, the air inside or outside the vehicle compartment is cooled (or warmed), and then the air blows into the vehicle

compartment through one of the foot blowout ports **105d** and the face blowout port **105c**.

Now, effects of the present embodiment will be described. The air conditioner for vehicles of the present embodiment includes the air conditioning unit **151**, the IR sensor **131**, and the ECU **30**. The IR sensor **131** is disposed above the face blowout port **105c**.

The air conditioning unit **151** regulates the air temperature and feeds the conditioned air into the vehicle compartment through one of the face blowout port **105c**, the foot blowout port **105d**, and both. The IR sensor **131** senses the surface temperature of a temperature-detecting range in the vehicle compartment without contacting. The ECU **130** controls the air conditioning unit **151** according to the temperature sensed by the IR sensor **131** so that the air conditioning unit **51** can regulate the air temperature and feed the conditioned air through the face blowout port **105c** and the foot blowout port.

For example, when the air is cooled down, the cooled air flows in a downward direction from the face blowout port **105c**. In such a situation, if the IR sensor **131** is disposed below the face blowout port **105c**, the facing plate of the blowout-port assembly **150** is cooled. In addition, when the instrument panel **1s** is molded with a thermally insulating material, the back side of the blowout-port assembly **150** is thermally insulated by the instrument panel **1s**. In such a situation, an uneven distribution of temperature at the blowout-port assembly **150** and also at the IR sensor **131** is existed.

Accordingly, regardless of incident infrared rays from the temperature-detecting range, there occurs difference in temperature between the hot and cold junctions of the thermocouple unit **520**. Therefore, the thermocouple unit **520** generates thermoelectromotive force including detection error corresponding to the temperature difference between its hot and cold junctions.

On the other hand, according to the present embodiment, the IR sensor **131** is disposed above the face blowout-port **105c**. Therefore, the IR sensor **131** is hardly affected by the cooled airflow blown out of the face blowout-port **105c**. The voltage outputted by the IR sensor **131** shows the surface temperature of the temperature-detecting range as accurate. Since the ECU **130** carries out the air-conditioning control based on the voltage outputted by the IR sensor **131**, the air in the vehicle compartment is desirably air-conditioned. The air-conditioning control means here is to control the temperature and the air volume of the conditioned air, which is flowed through the blowout ports **150c** and **150d**.

According to the present embodiment, the IR sensor **131** detects the surface temperatures of the ceiling **143**, the side window **144a**, the rear window **145**, and the upper half of the driver's body. The surface temperature of the ceiling **143** is varied generally according to the air temperature of the vehicle compartment. The surface temperature of the side window **144a** and the rear window **145** is varied under the influence of the outside air temperature. That of the upper half of the driver's body **142a** is varied under the influence of sunlight. Accordingly, the IR sensor **131** measures the surface temperatures within the detecting range based on the inside and outside air temperatures and environmental data including the intensity of sunshine.

Thus, since it is possible to properly control the compartment temperature based on the inside and outside air temperatures and the intensity of sunshine, while preventing the reduction in controllability of the compartment temperature, costs for the sensors and for assembling the sensors can be

reduced by getting rid of the sensors for inside and outside air temperatures and for the intensity of sunshine.

Further, according to the present invention, the IR sensor **131** is built in the blowout port assembly **150** and embedded or sunk in the facing plate **550** as shown in FIG. **21**. Therefore, even when the airflow is directed in an upward direction by an airflow direction regulation plate disposed at the face blowout port **105c**, the IR sensor **131** is hardly affected by the temperature of the airflow.

Since the IR sensor **131** is built in the blowout port assembly **150** and embedded or sunk in the facing plate **550**, the sunlight outside the vehicle compartment is prevented from directly entering and causing unreliable measurement of temperature.

As described above, the IR sensor **131** is disposed in the blowout port assembly **150** of the instrument panel **1s**. Therefore, when the ECU **130** is placed in the instrument panel **1s**, connection wires between the ECU **130** and the IR sensor **131** can be short compared to the case of placing the IR sensor **131** at other positions, such as the one near a room mirror of the ceiling. This cuts down on costs and reduces influences from electric noises such as electronic waves.

According to experimental results in FIGS. **27**, **28**, operations of the air conditioner of the present embodiment is explained in comparison with a conventional air conditioner for vehicles. The conventional air conditioner has an IR sensor disposed below a face blowout port.

In FIGS. **27** and **28**, the horizontal axis shows time (minutes), and the vertical axis shows temperature ($^{\circ}$ C.) and voltage (volt). A line H1 shows a temperature around a driver such as a face, knees, and a waist of a driver. A line H2 shows an average value of temperatures detected by the IR sensor **131** (for example, an average value of four detected temperatures). A line H3 shows a blower voltage applied to the blower motor **123**. The lines H1 to H3 of FIG. **27** show experimental results of the air conditioner for vehicles of the present embodiment. The lines H1 to H3 of FIG. **28** show experimental results of the conventional air conditioner.

According to the experimental results of FIGS. **27** and **28**, the blower voltage corresponding to the line H3 in the present embodiment of the present invention is smoothly reduced as temperatures of the face, knees and waist of the driver decrease in comparison with the conventional air conditioner shown in FIG. **28**. That is, the blower voltage, namely, the air volume of the air fed through the blowout ports decreases smoothly in accordance with the driver's feeling of heat or cold.

In other words, when cooling down, a transient period and a stationary state are properly switched in accordance with the driver's feeling of heat or cold. The transient period is when air temperature of the vehicle compartment decreases. The stationary state is when the air temperature of the vehicle compartment is stabilized. Therefore, the air in the vehicle compartment is desirably controlled for the driver.

Seventh Embodiment

In the sixth embodiment, the IR sensor **131** is disposed above the face blowout port **105c**. Instead, in the seventh embodiment, the IR sensor **131** is disposed beside the face blowout port **105c** as shown in FIG. **29**. The IR sensor **131** is disposed in the instrument panel **1s** and embedded or sunk in the facing plate **550a** similarly to the sixth embodiment.

In such a location of the IR sensor **131**, since the air fed through the face blowout port **105c** flows in a downward direction, the IR sensor **131** is hardly affected by the

23

temperature of the airflow. Further, even when the airflow is directed sideways by the airflow direction regulation plate of the face blowout port 105c, the IR sensor 131 is hardly affected by the temperature of the air flow because the IR sensor 131 is disposed in the instrument panel 1s to be embedded or sunk in the facing plate 550a.

The experimental results of the air conditioner for vehicles of the seventh embodiment are shown in FIG. 30. In FIG. 30, the horizontal axis shows time (minutes), and the vertical axis shows temperature (° C.) and voltage (volt). The line H1 shows temperatures of a face, knees and a waist of a driver. The line H2 shows an average value of temperatures detected by the IR sensor 131 (for example, an average value of four detected temperatures). The line H3 shows the blower voltage applied to the blower motor 123.

According to the experimental results of FIG. 30, as in the above sixth embodiment, the blower voltage in the seventh embodiment is smoothly reduced as temperatures at the face, knees and waist of the driver decrease in comparison with the conventional air conditioner shown in FIG. 28. Further, during the cooling, the transient period and the stationary state are properly switched in accordance with the driver's feeling of heat or cold. The transient period is when air temperature of the vehicle compartment decreases. The stationary state is when the air temperature of the vehicle compartment is stabilized. Therefore, the air in the vehicle compartment is desirably controlled for the driver.

OTHER MODIFICATIONS

The present invention should not be limited to the embodiments discussed above and shown in the figures, but may be implemented in various ways without departing from the spirit of the invention. For example, in the sixth and seventh embodiments, the thermopile-type infrared sensor 131 is used as the non-contact temperature sensor. However, any temperature sensors may be used so long as they show detection errors when the sensor is affected by the temperature of the cooled airflow.

In the embodiments, the air conditioner for vehicles has a cooling mode and a heating mode, and the modes are switched. Instead of it, however, an air conditioner exclusively used for cooling may be adopted.

The IR sensor is preferably disposed above the face blowout port and the switches, such as the temperature-setting switch on the LCD.

What is claimed is:

1. A vehicle air conditioner for a vehicle, the vehicle having an instrument panel on which at least one of a temperature-setting switch, an air volume-setting switch, an audio switch, and a navigation switch is disposed, the vehicle air conditioner comprising:

a non-contact temperature sensor that detects a temperature of inside air of the vehicle;

a control unit that controls a temperature of conditioned air flowing into a vehicle compartment based on the temperature detected by the non-contact temperature sensor, and

24

a memory that stores a plurality of detection values detected by the non-contact temperature sensor; wherein

the non-contact temperature sensor is disposed on the instrument panel so that the non-contact temperature sensor is disposed above at least one of the temperature-setting switch, the air volume-setting switch, the audio switch, and the navigation switch; and

upon detecting an operation of one of the temperature-setting switch, the air volume-setting switch, the audio switch, and the navigation switch, the control unit controls the temperature of the conditioned air based on the detection values that is an average of the plurality of detection values stored in the memory.

2. The vehicle air conditioner according to claim 1, wherein the non-contact temperature sensor is disposed above the temperature-setting switch and the air volume-setting switch.

3. The vehicle air conditioner according to claim 1, wherein the non-contact temperature sensor is positioned off a centerline of the vehicle toward a passenger seat.

4. The vehicle air conditioner according to claim 1, wherein the non-contact temperature sensor is an infrared temperature sensor, and a sign of the infrared temperature sensor is placed on one side of the infrared temperature sensor to indicate its existence.

5. The vehicle air conditioner according to claim 1, wherein the instrument panel has a front recess in a shape of one of a cone and a pyramid, and has a temperature-sensing window positioned at the bottom of the front recess.

6. The vehicle air conditioner according to claim 5, wherein the front recess is opened toward the vehicle compartment so that the front recess has a bottom surface sloping down toward the vehicle compartment.

7. The vehicle air conditioner according to claim 5, wherein the front recess is directly formed in a facing plate that is a part of the instrument panel.

8. The vehicle air conditioner according to claim 5, wherein the non-contact temperature sensor includes:

a temperature sensing element that has a thermocouple; a sensor container that houses the temperature sensing element;

wherein the temperature-sensing window has a lens and a filter that is disposed at front side of the sensor container, and

the thermocouple is disposed in an inner part of the sensor container.

9. The vehicle air conditioner according to claim 5, wherein the instrument panel has a facing plate that has a hole in which the non-contact temperature sensor is disposed.

* * * * *