



US009878594B2

(12) **United States Patent**
Enomoto et al.

(10) **Patent No.:** **US 9,878,594 B2**
(45) **Date of Patent:** **Jan. 30, 2018**

(54) **THERMAL MANAGEMENT SYSTEM FOR VEHICLE**

(71) Applicant: **DENSO CORPORATION**, Kariya, Aichi-pref. (JP)

(72) Inventors: **Norihiko Enomoto**, Nagoya (JP);
Nobuharu Kakehashi, Toyoake (JP);
Michio Nishikawa, Nagoya (JP);
Masamichi Makihara, Anjo (JP);
Kazutoshi Kuwayama, Kariya (JP);
Yoshiki Katoh, Kariya (JP); **Kengo Sugimura**, Kariya (JP)

(73) Assignee: **DENSO CORPORATION**, Kariya, Aichi-pref. (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 506 days.

(21) Appl. No.: **14/423,666**

(22) PCT Filed: **Aug. 23, 2013**

(86) PCT No.: **PCT/JP2013/004986**

§ 371 (c)(1),

(2) Date: **Feb. 24, 2015**

(87) PCT Pub. No.: **WO2014/034062**

PCT Pub. Date: **Mar. 6, 2014**

(65) **Prior Publication Data**

US 2015/0258875 A1 Sep. 17, 2015

(30) **Foreign Application Priority Data**

Aug. 28, 2012 (JP) 2012-187153
Jul. 3, 2013 (JP) 2013-139568

(51) **Int. Cl.**

B60H 1/32 (2006.01)

B60L 1/00 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **B60H 1/32** (2013.01); **B60H 1/00878**
(2013.01); **B60H 1/08** (2013.01); **B60K 11/02**
(2013.01);

(Continued)

(58) **Field of Classification Search**

CPC **B60H 1/00**; **B60H 1/0021**; **B60H 1/00298**;
B60H 1/00385; **B60H 1/00878**;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,695,720 A * 12/1997 Wade G01N 35/085
356/36

5,971,290 A 10/1999 Echigoya et al.
(Continued)

FOREIGN PATENT DOCUMENTS

EP 1059426 A2 12/2000
JP H10266855 A 10/1998

(Continued)

OTHER PUBLICATIONS

U.S. Appl. No. 14/423,665, Norihiko Enomoto et al., filed Feb. 24, 2015.

(Continued)

Primary Examiner — Len Tran


Assistant Examiner — Gustavo Hincapie Serna

(74) *Attorney, Agent, or Firm* — Harness, Dickey & Pierce, P.L.C.

(57) **ABSTRACT**

A thermal management system for a vehicle includes a first pump and a second pump, temperature adjustment target devices, heat exchangers, numerous flow paths including a first pump arrangement flow path, a second pump arrangement flow path, and device arrangement flow paths, a first switching portion for allowing the numerous flow paths to selectively communicate with each other, a second switch-

(Continued)

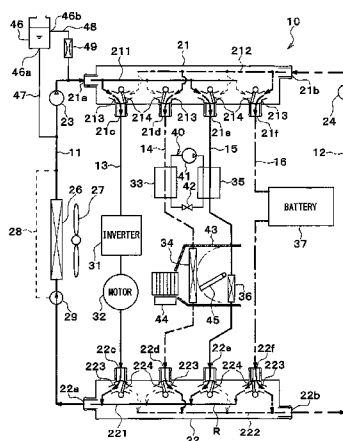

ing portion for allowing the numerous flow paths to selectively communicate with each other, and a reserve tank for storing therein heat medium. The reserve tank is configured to set the pressure of the liquid surface of the stored heat medium to a predetermined pressure (e.g., atmospheric pressure), and is connected to one flow path of the numerous flow paths.

22 Claims, 21 Drawing Sheets

(51) Int. Cl.

B60L 1/02 (2006.01)
B60L 3/00 (2006.01)
B60H 1/00 (2006.01)
B60H 1/08 (2006.01)
B60L 11/18 (2006.01)
B60K 11/02 (2006.01)

(52) U.S. Cl.

CPC **B60L 1/003** (2013.01); **B60L 1/02** (2013.01); **B60L 3/00** (2013.01); **B60L 3/0092** (2013.01); **B60L 11/1874** (2013.01); **B60H 1/00485** (2013.01); **B60L 2240/34** (2013.01); **B60L 2240/36** (2013.01); **B60L 2240/425** (2013.01); **B60L 2240/525** (2013.01); **B60L 2240/545** (2013.01); **B60L 2240/662** (2013.01); **Y02T 10/642** (2013.01); **Y02T 10/7005** (2013.01); **Y02T 10/705** (2013.01); **Y02T 10/7291** (2013.01); **Y02T 90/16** (2013.01)

(58) Field of Classification Search

CPC B60H 1/08; B60H 1/22; B60H 1/32; B60L 1/003; B60L 1/02; B60L 3/0092; B60L 3/00; B60L 11/874; B60L 2240/24; B60L 2240/36; B60L 2240/425; B60L 2240/525; B60L 2240/545; B60L 2240/662; B60K 11/02; Y02T 10/7005; Y02T 10/705; Y02T 90/16; Y02T 10/7291; Y02T 10/642

USPC 165/41, 42, 96, 100, 101
 See application file for complete search history.

(56)

References Cited

U.S. PATENT DOCUMENTS

6,357,541 B1	3/2002	Matsuda et al.	
2002/0014330 A1 *	2/2002	Guyonvarch	B60H 1/00007 165/202
2008/0022710 A1 *	1/2008	Jeong	F25B 13/00 62/324.6
2011/0113800 A1 *	5/2011	Sekiya	B60H 1/00278 62/151
2011/0192184 A1 *	8/2011	Yamashita	F24F 1/02 62/196.1
2011/0197608 A1 *	8/2011	Yamashita	F24F 3/06 62/190
2011/0296855 A1	12/2011	Johnston et al.	
2012/0180515 A1 *	7/2012	Morimoto	F24F 3/06 62/324.6
2012/0205088 A1	8/2012	Morisita et al.	
2012/0222441 A1	9/2012	Sawada et al.	
2013/0098092 A1 *	4/2013	Wakamoto	F25B 1/10 62/278
2014/0096557 A1 *	4/2014	Higashiiue	F25B 13/00 62/324.6
2014/0374081 A1 *	12/2014	Kakehashi	B60K 11/02 165/202
2015/0000327 A1 *	1/2015	Kakehashi	F25D 17/02 62/434
2015/0101789 A1 *	4/2015	Enomoto	B60H 1/00485 165/202
2015/0273976 A1 *	10/2015	Enomoto	B60K 6/22 165/202

FOREIGN PATENT DOCUMENTS

JP	H10266856 A	10/1998
JP	H10297261 A	11/1998
JP	2009202794 A	9/2009
JP	2010272289 A	12/2010
JP	2011112312 A	6/2011
JP	2011121551 A	6/2011
JP	2011157035 A	8/2011
JP	2011255879 A	12/2011
WO	WO-2014034061 A1	3/2014

OTHER PUBLICATIONS

International Search Report and Written Opinion (in Japanese with English Translation) for PCT/JP2013/004986, dated Nov. 19, 2013; ISA/JP.

* cited by examiner

FIG. 1

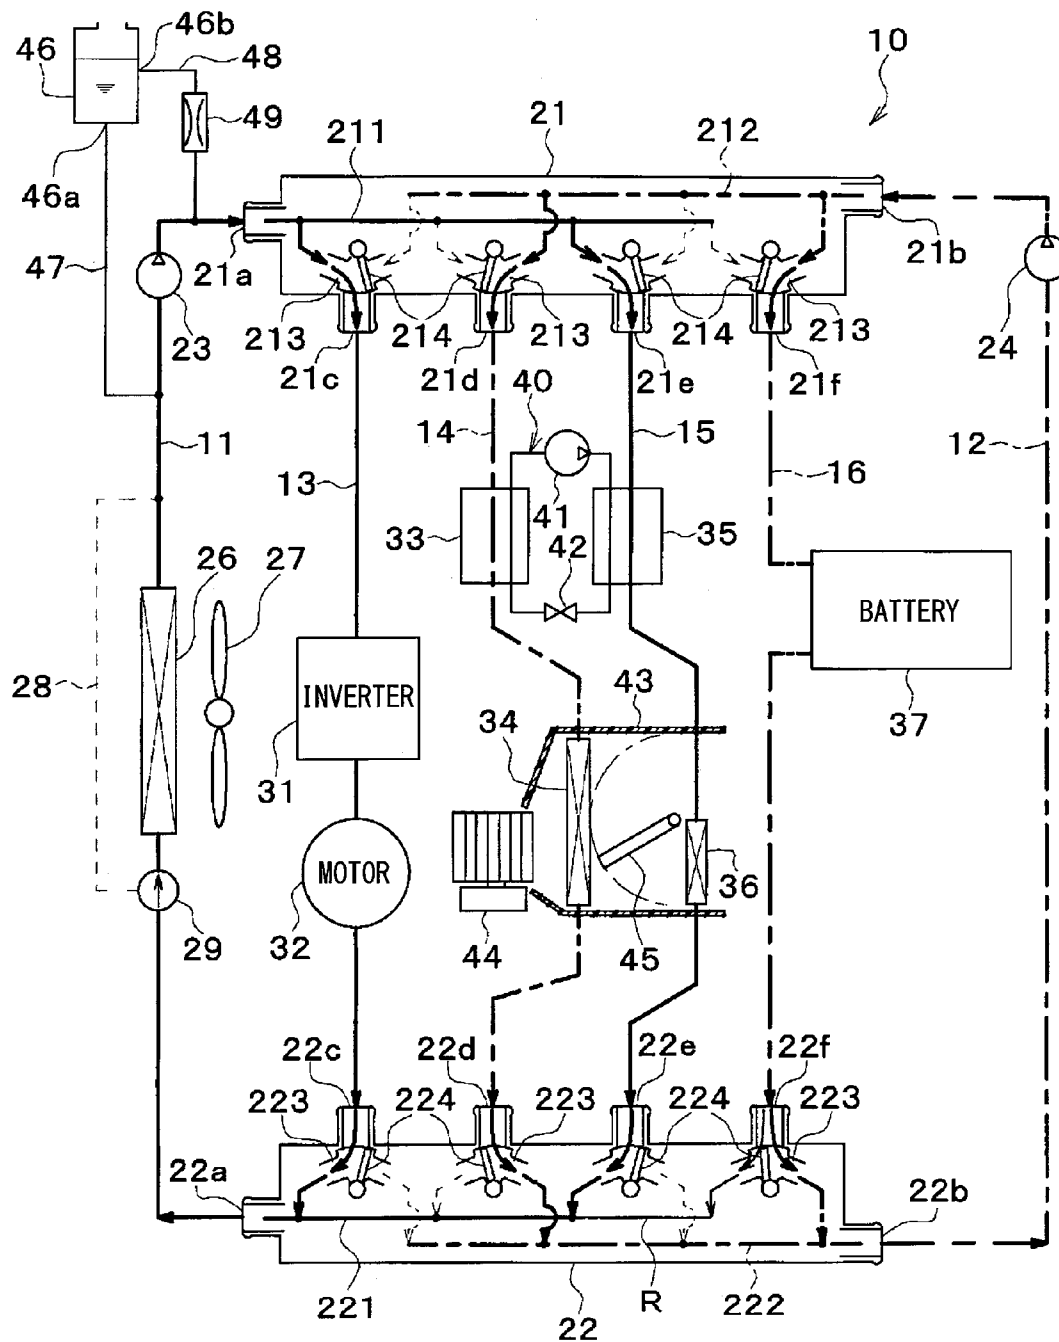


FIG. 2

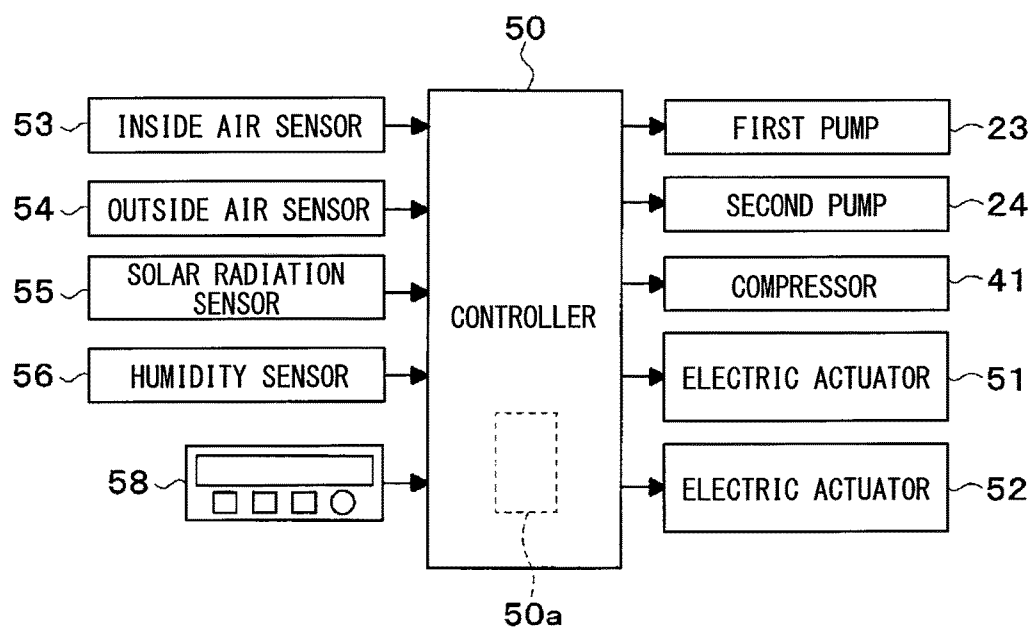


FIG. 3

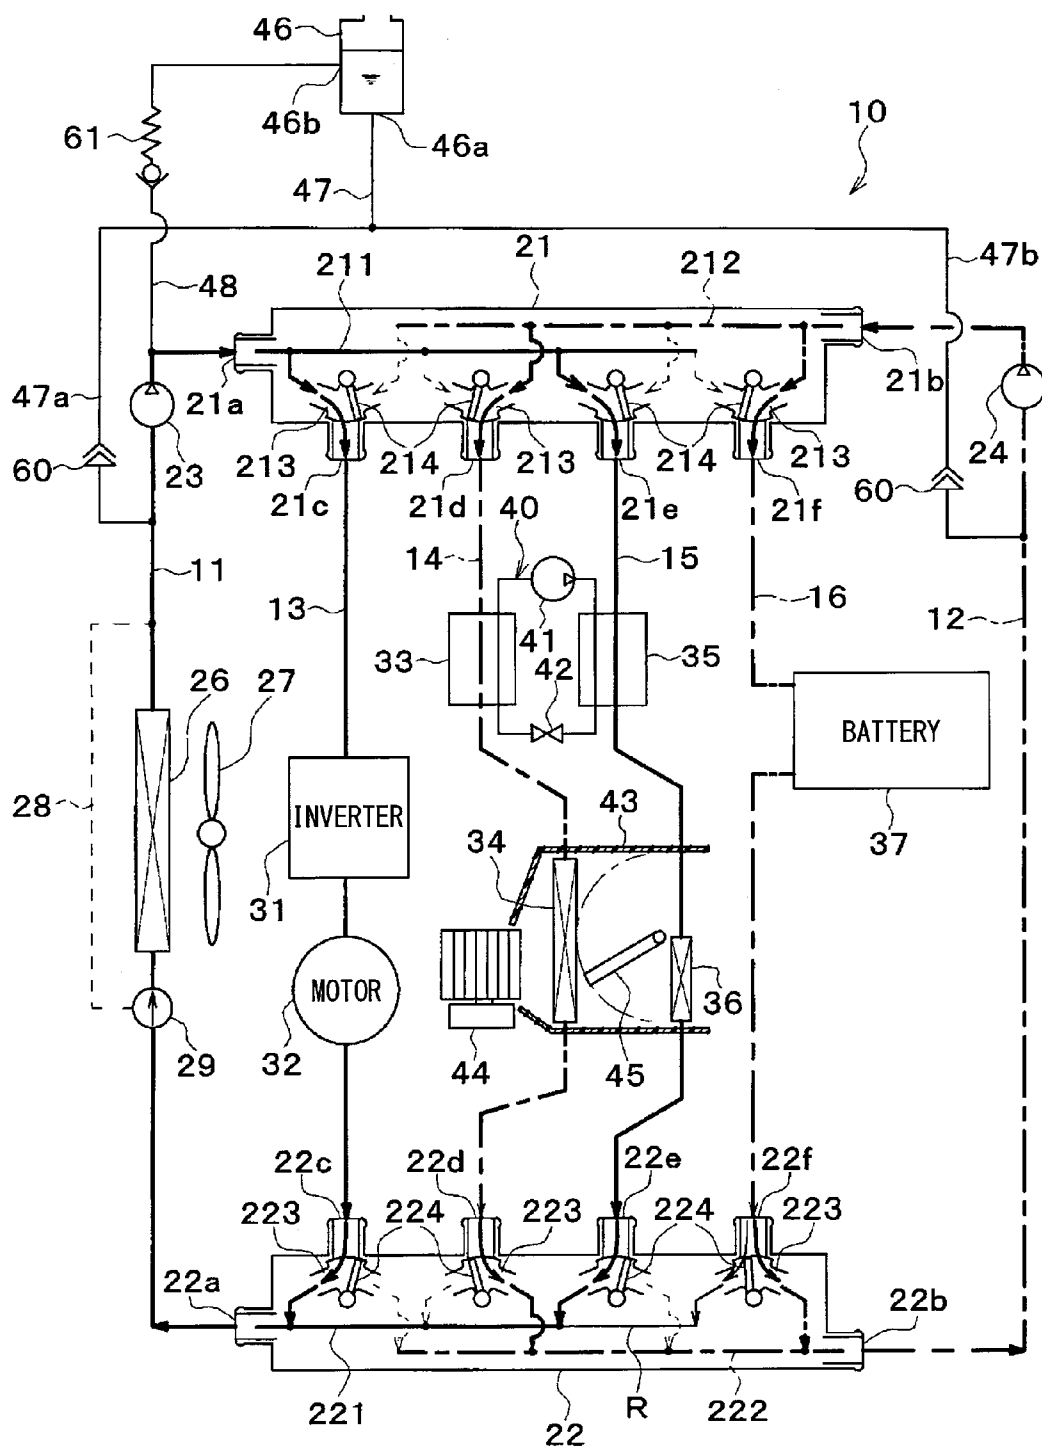


FIG. 4

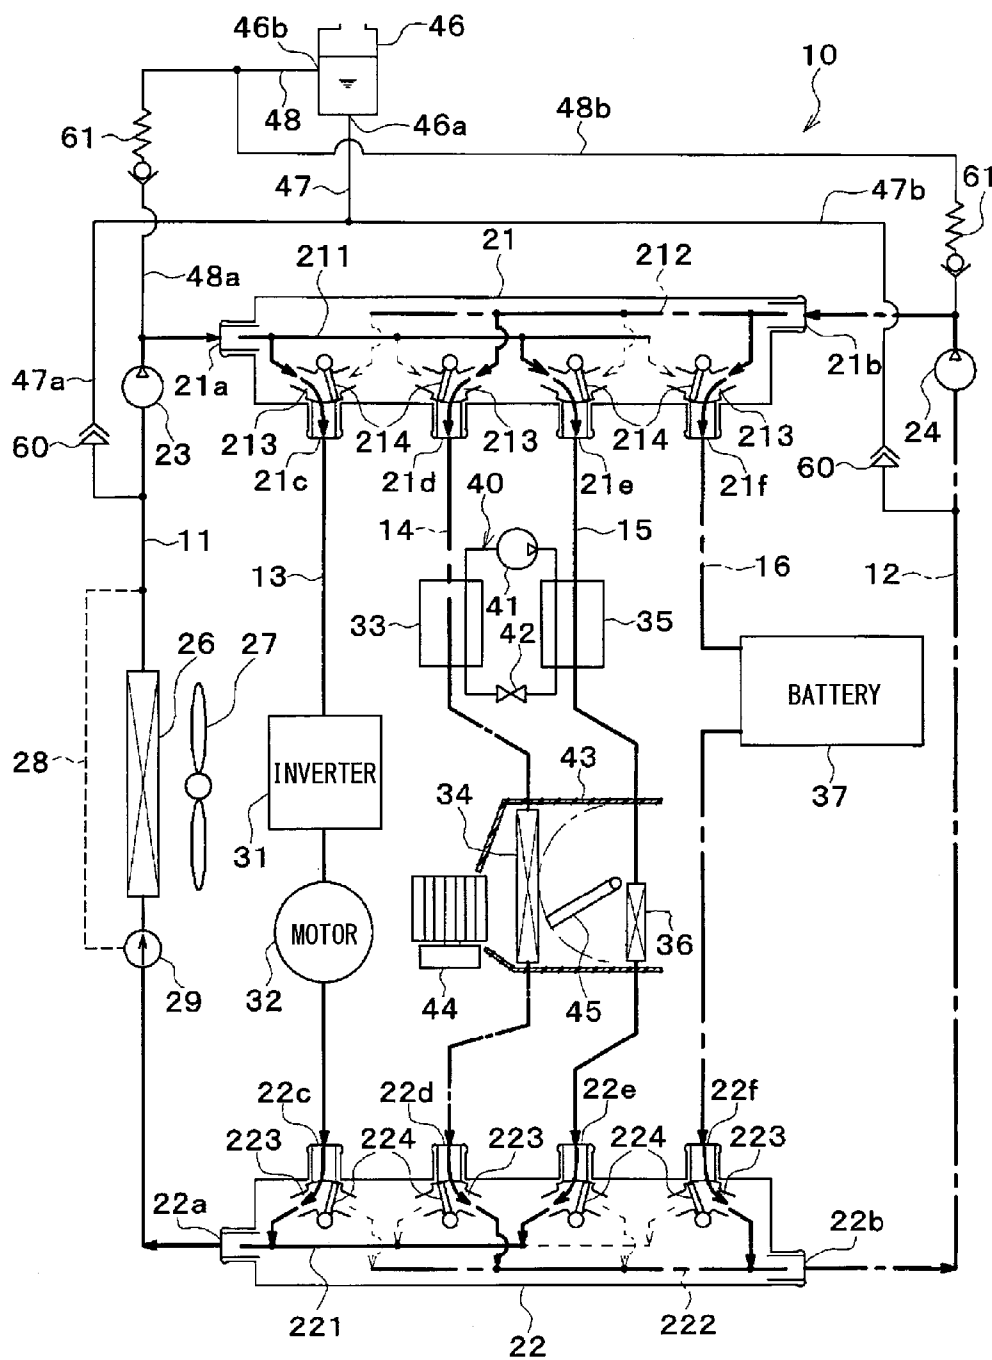


FIG. 5

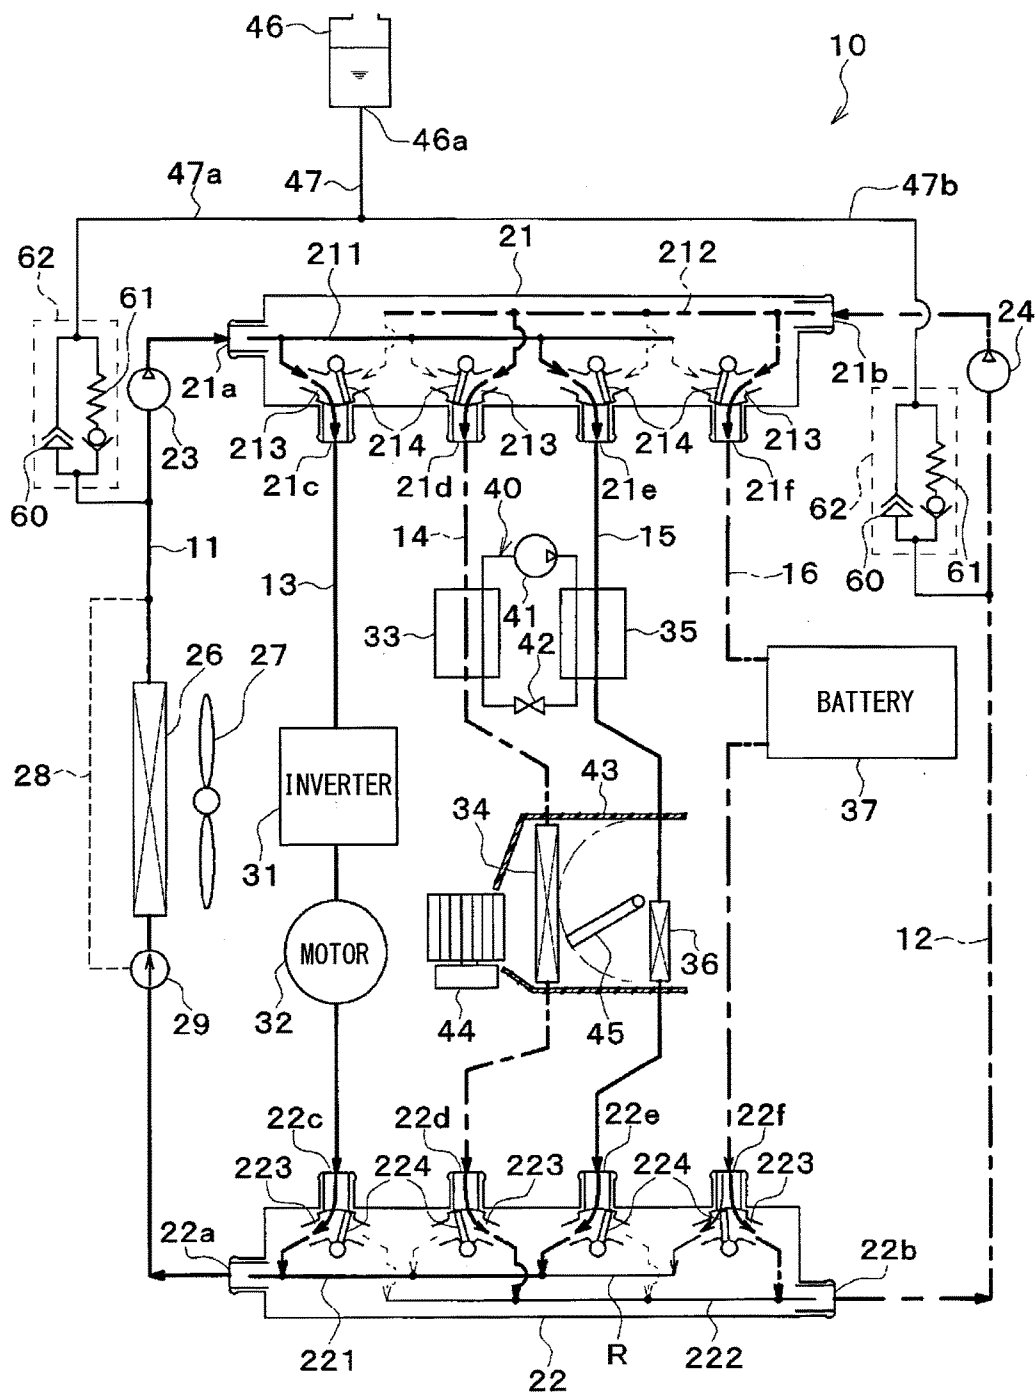


FIG. 6

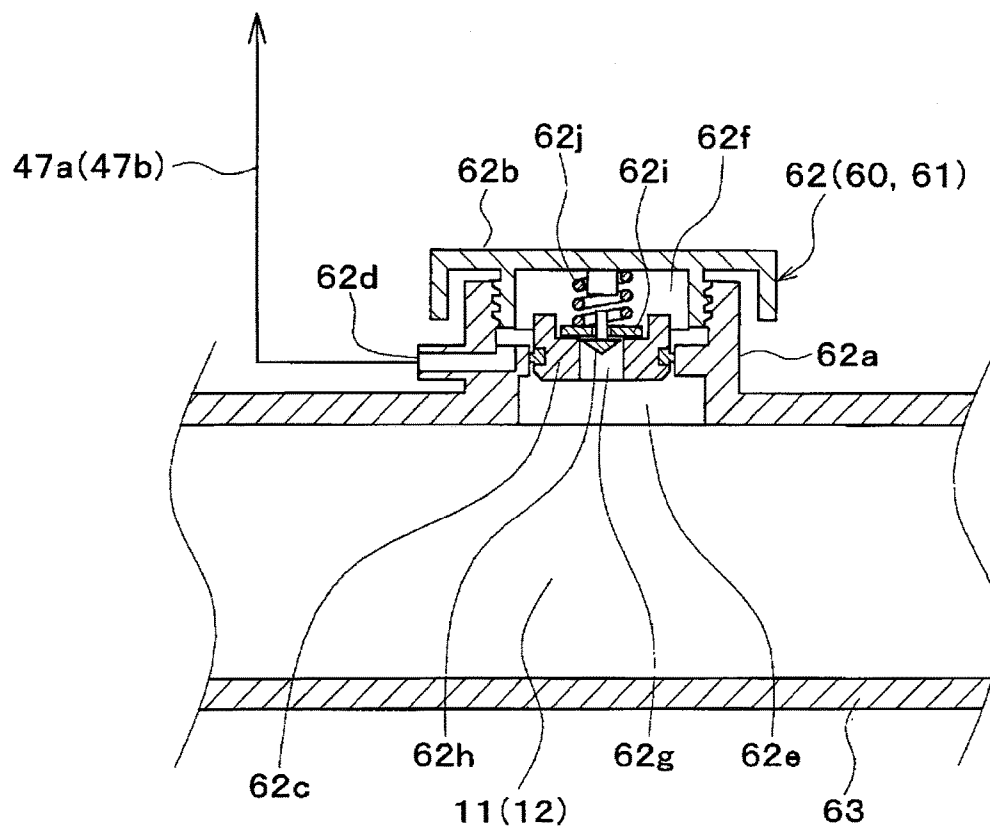


FIG. 7

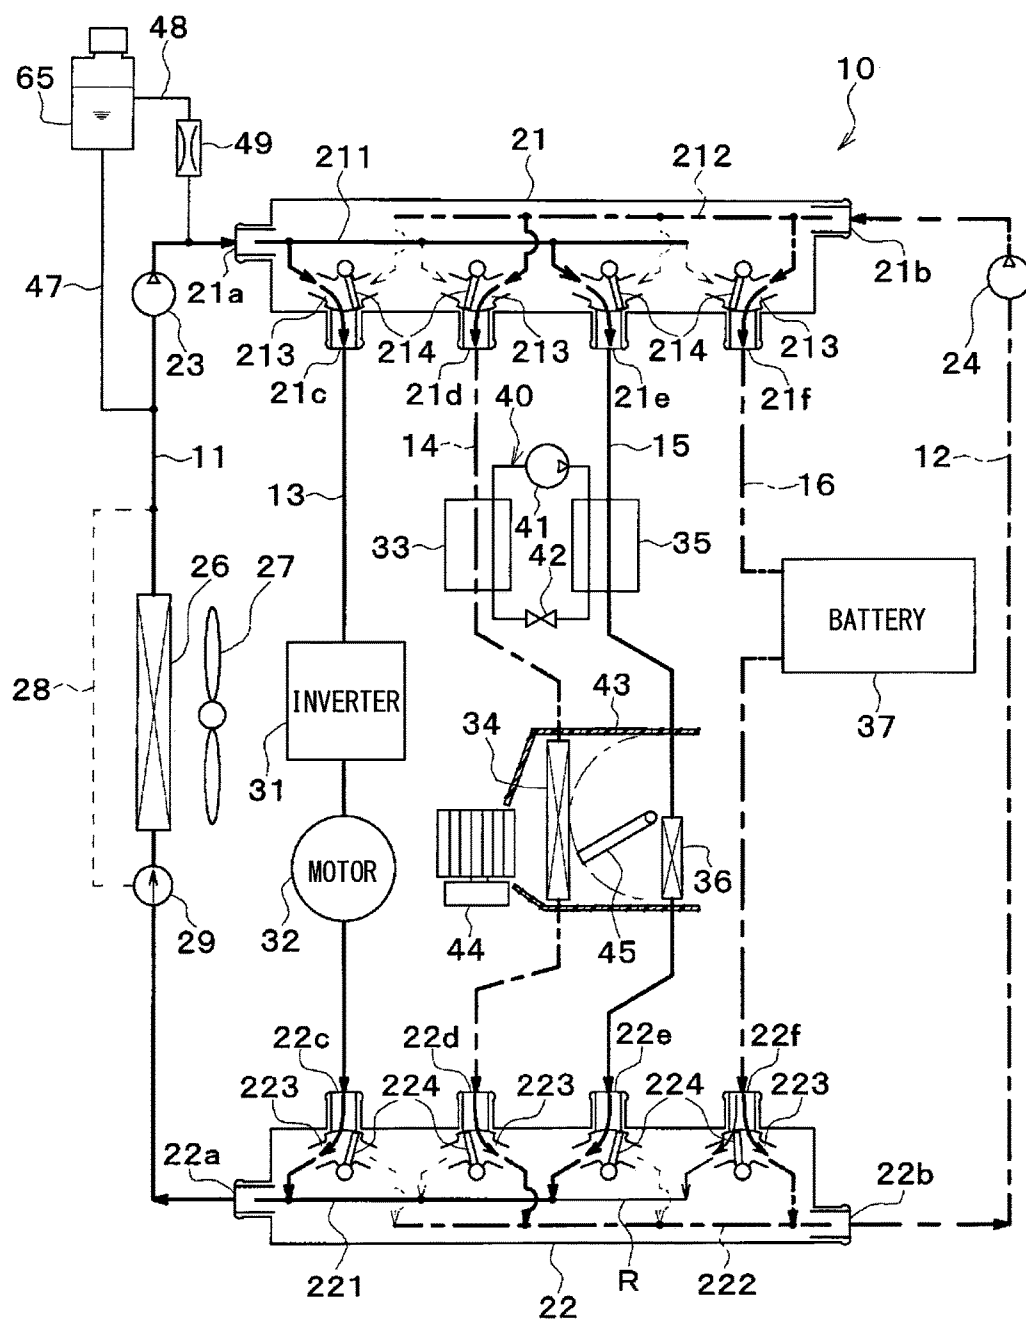


FIG. 8

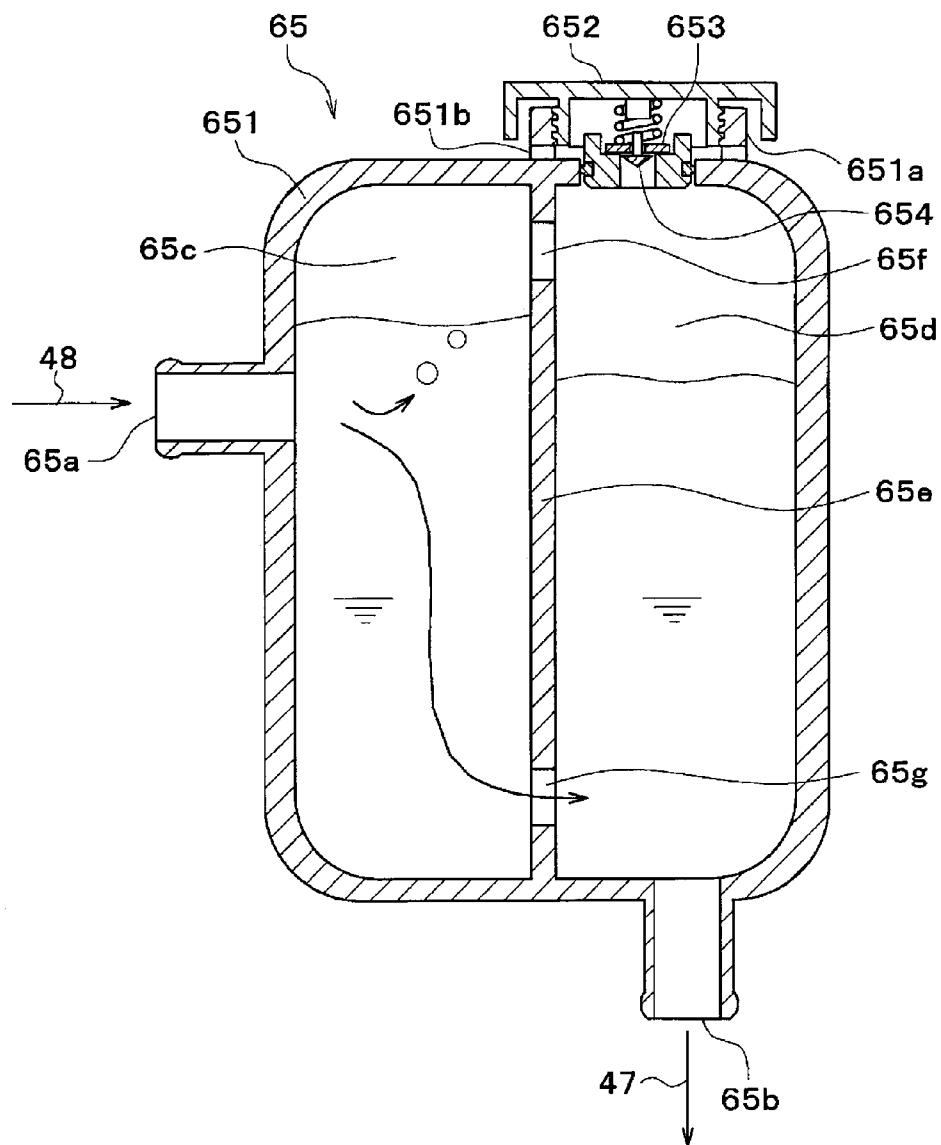
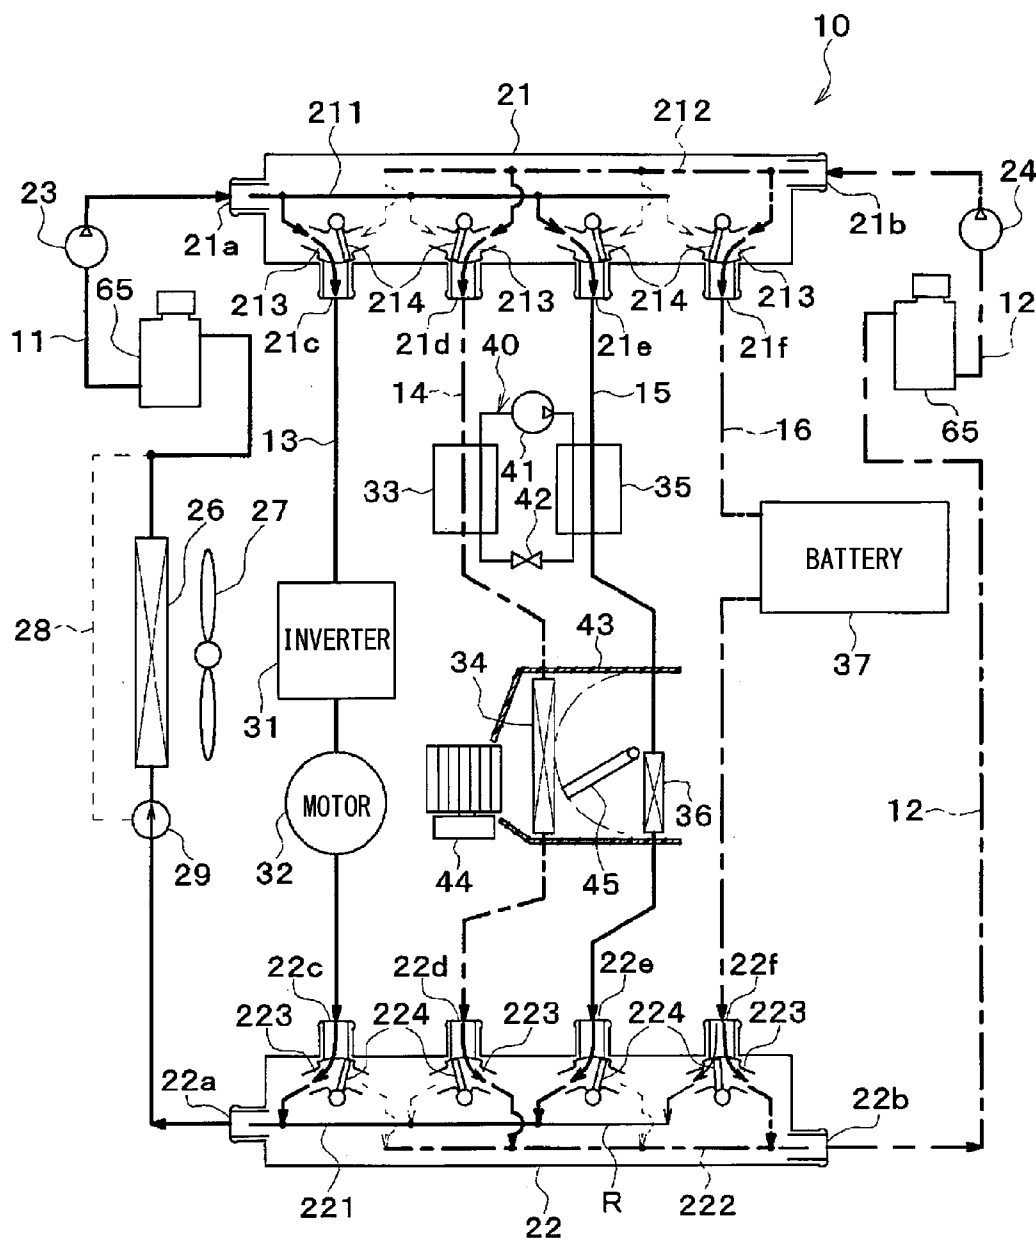


FIG. 9



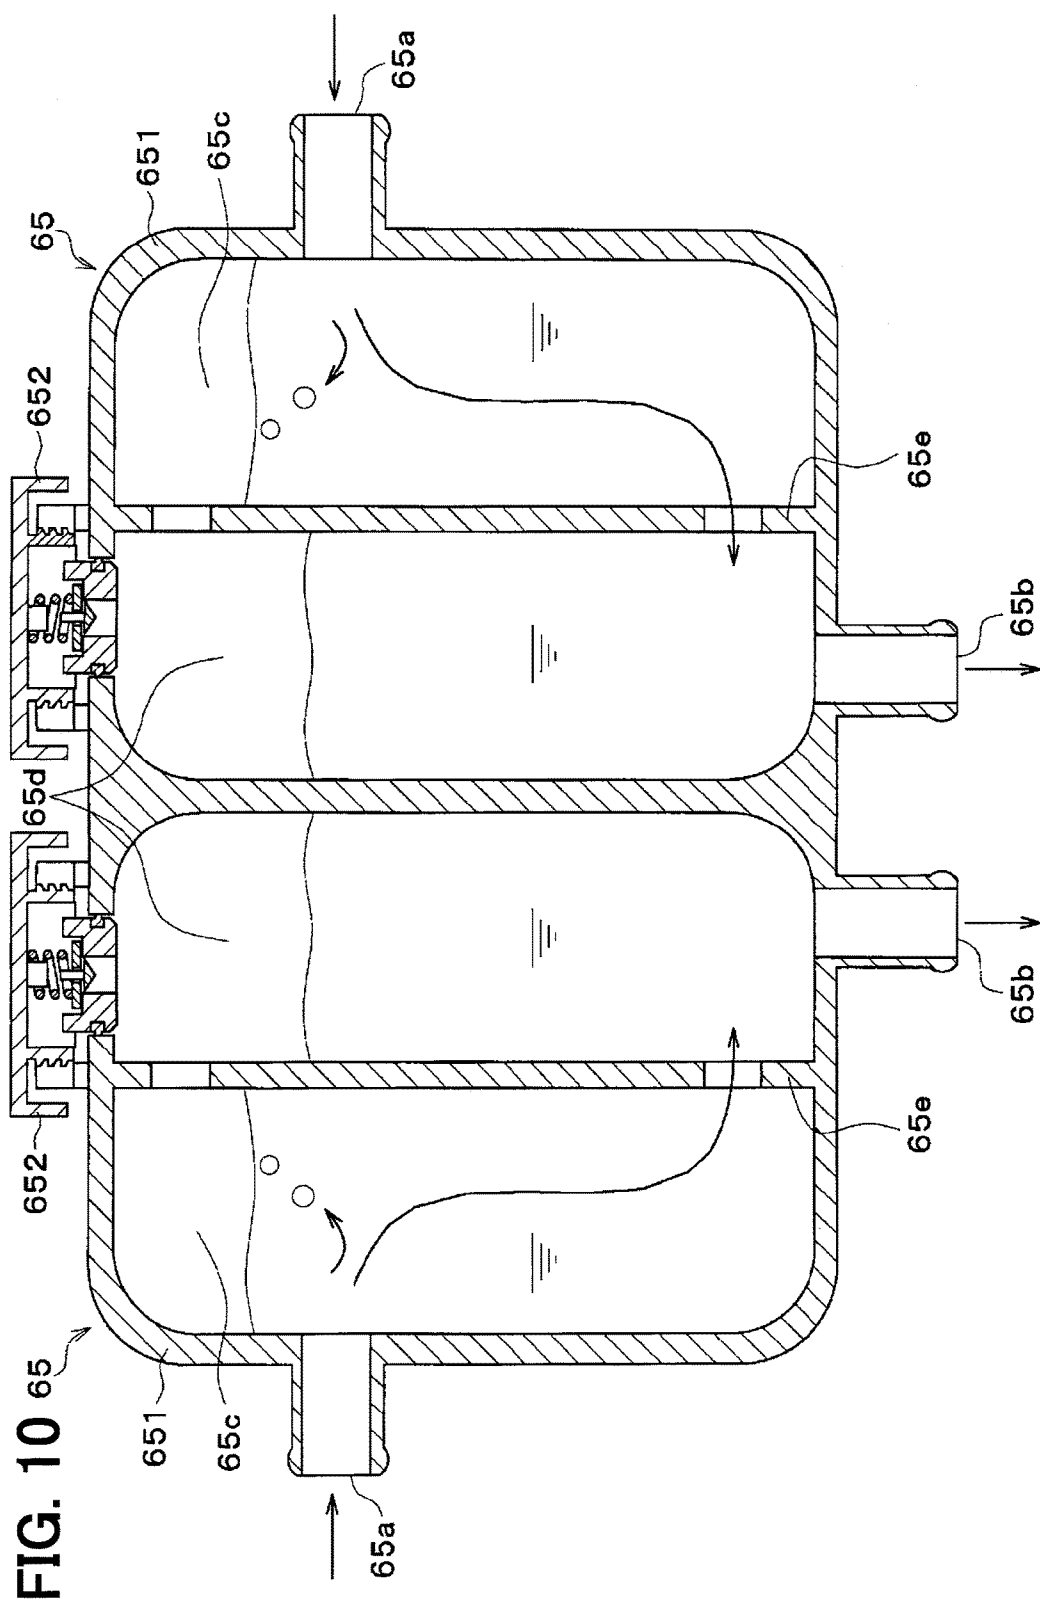


FIG. 11

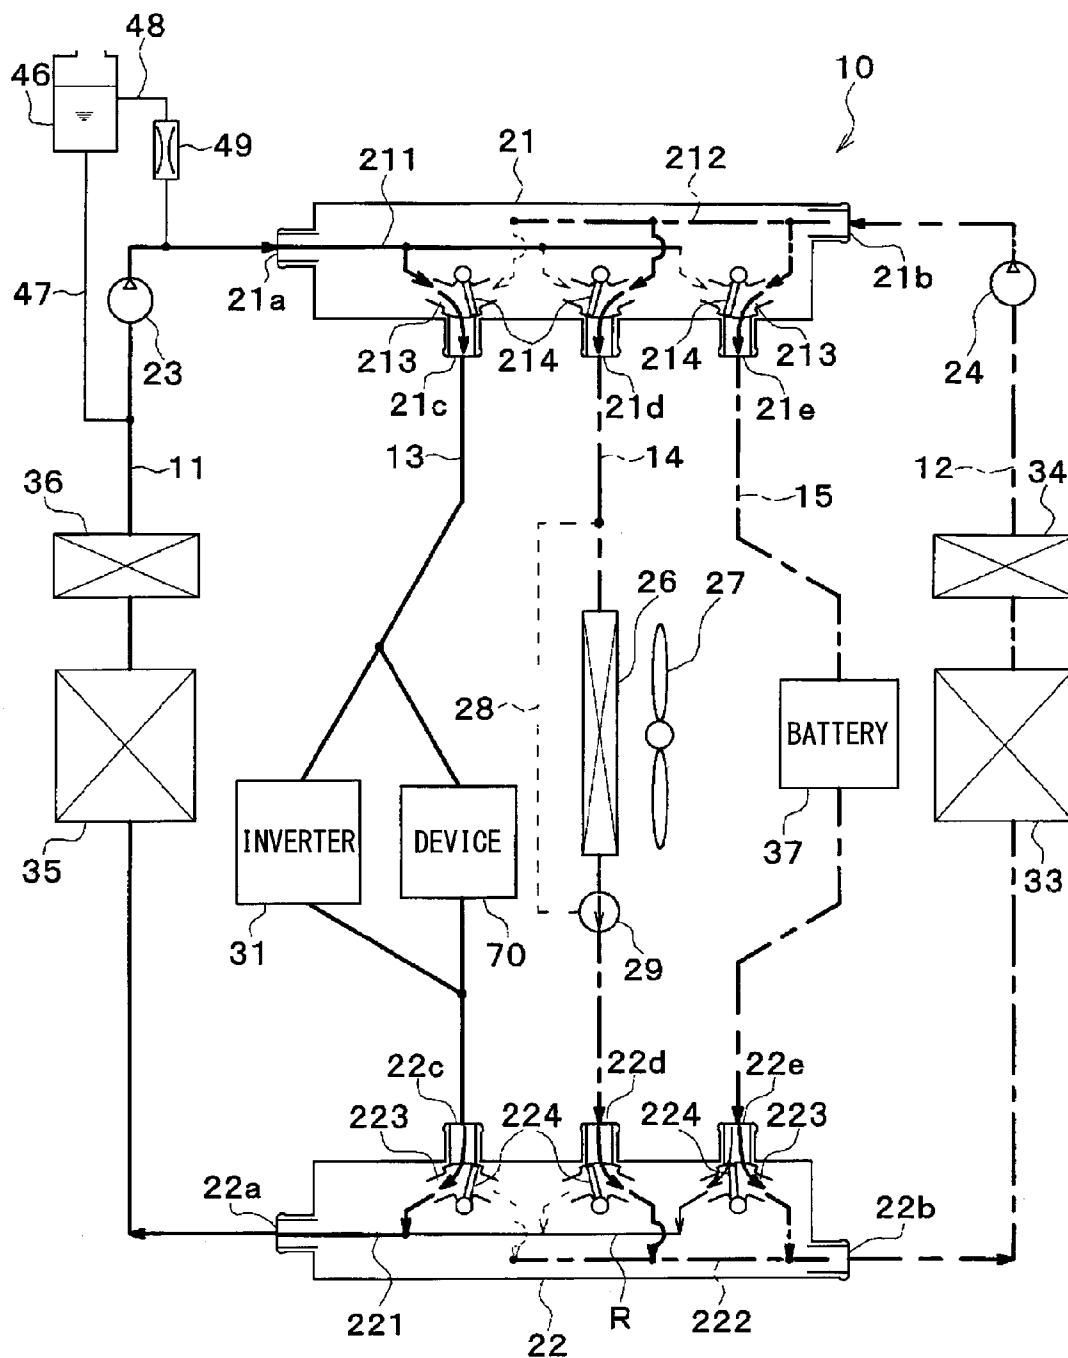


FIG. 12

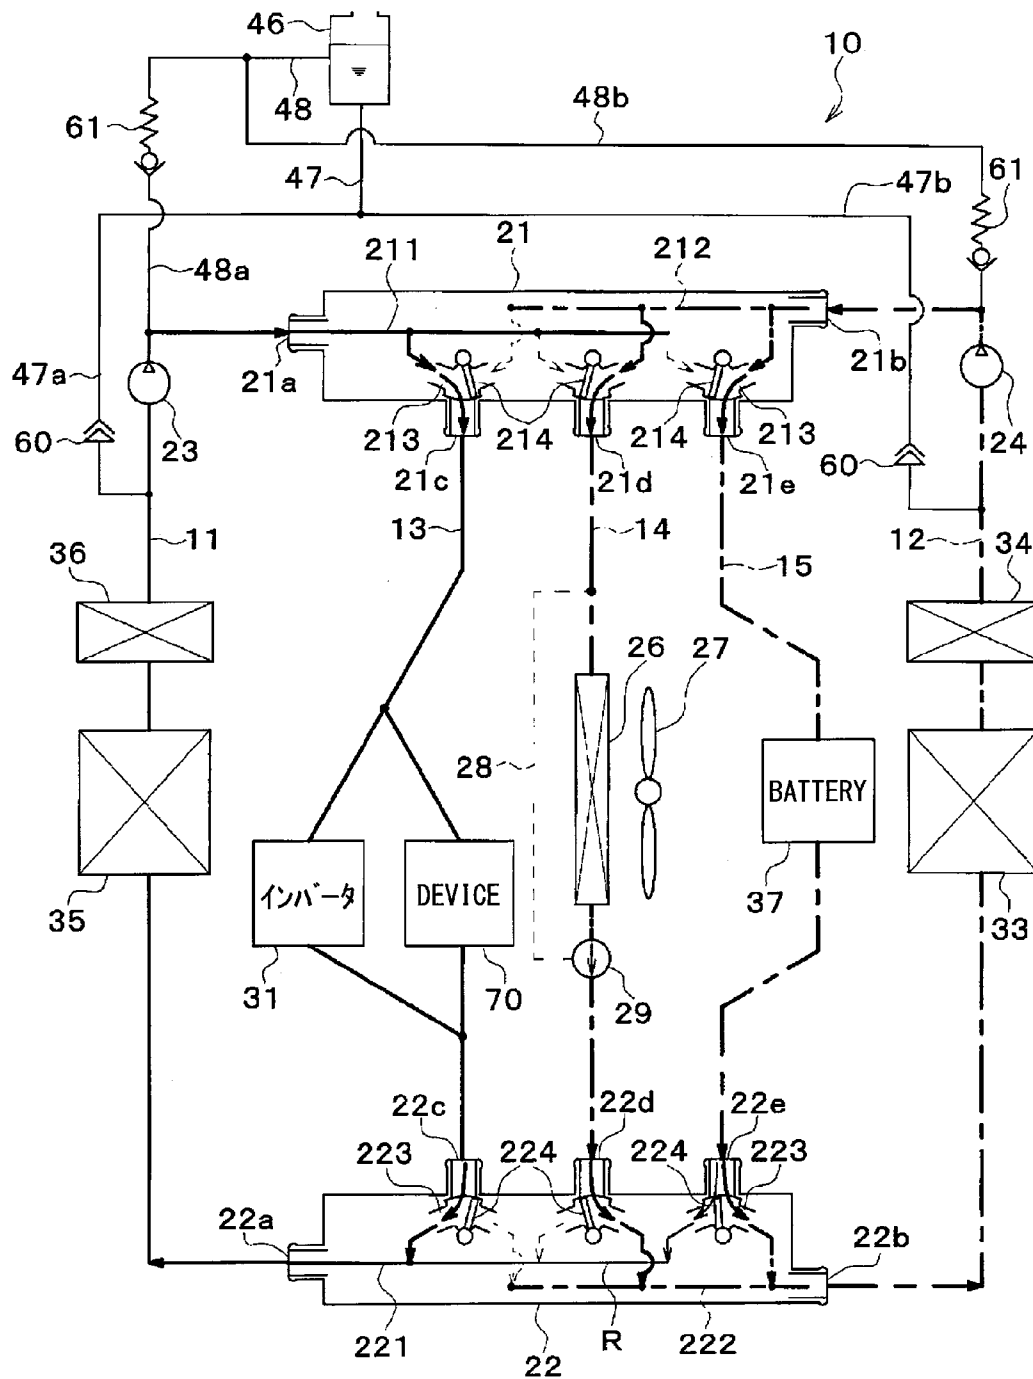


FIG. 13

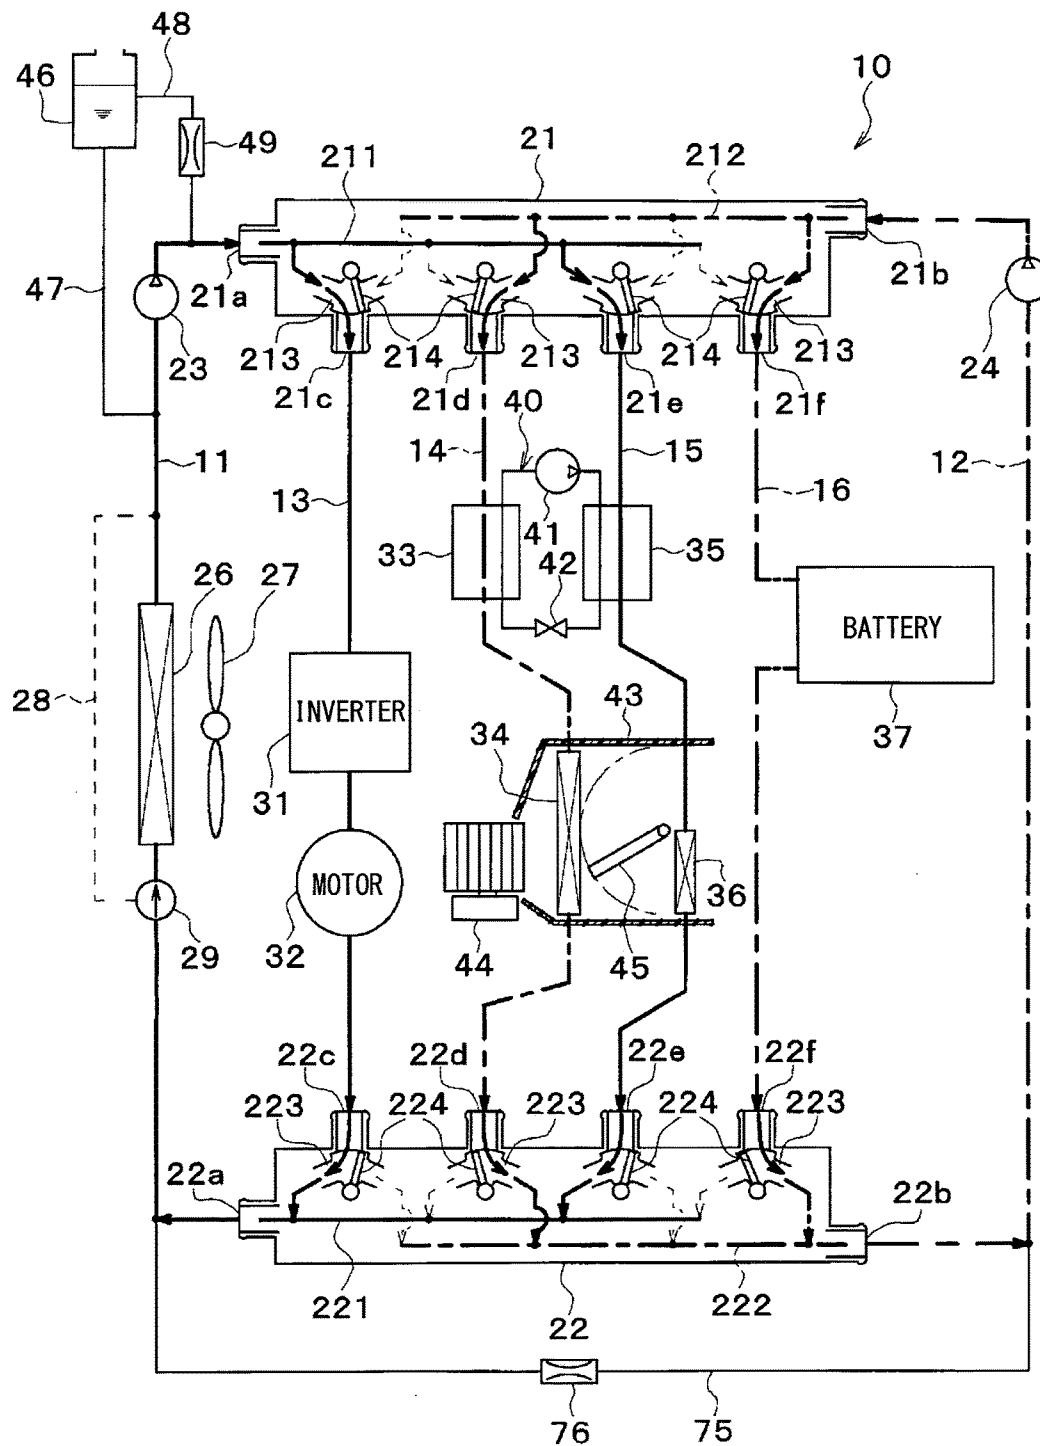


FIG. 14

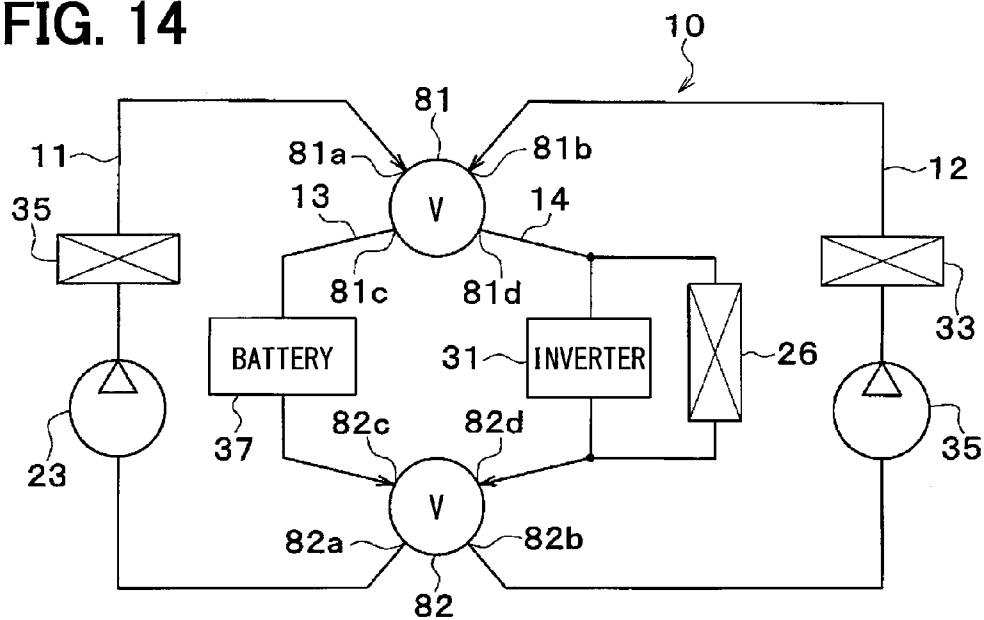


FIG. 15

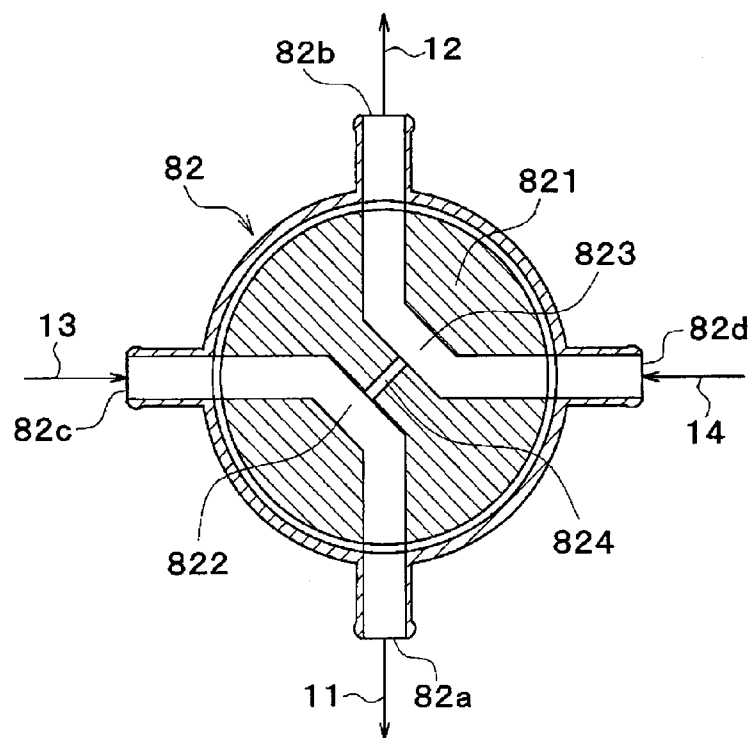


FIG. 16

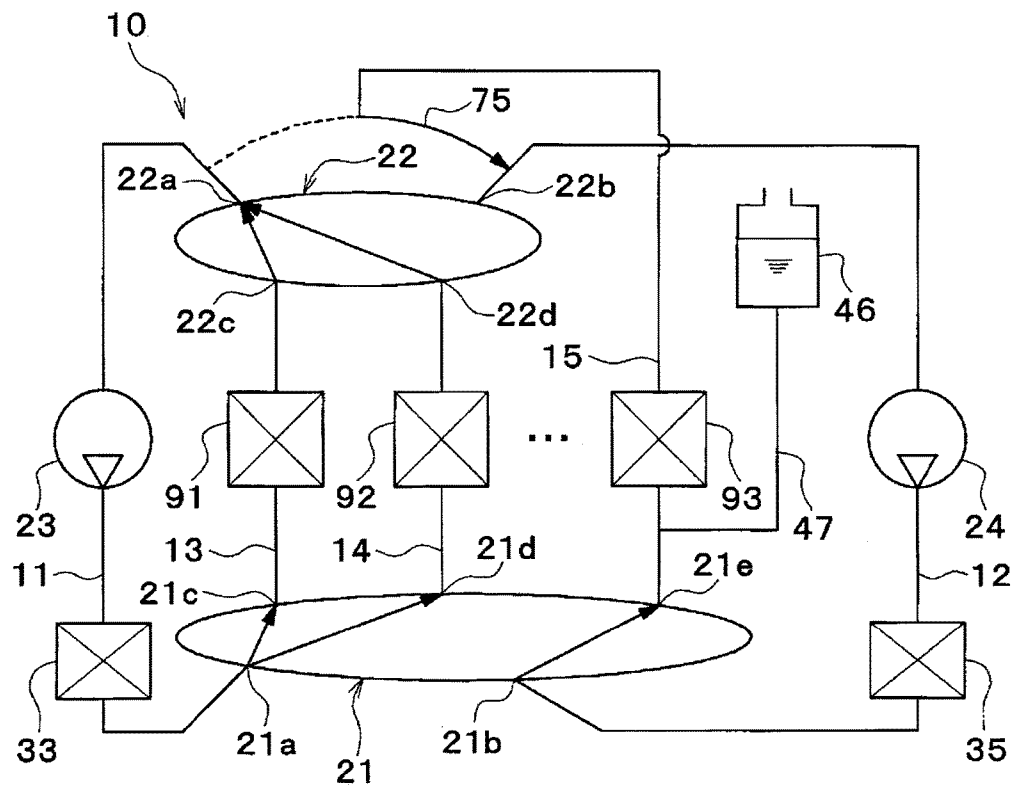


FIG. 17

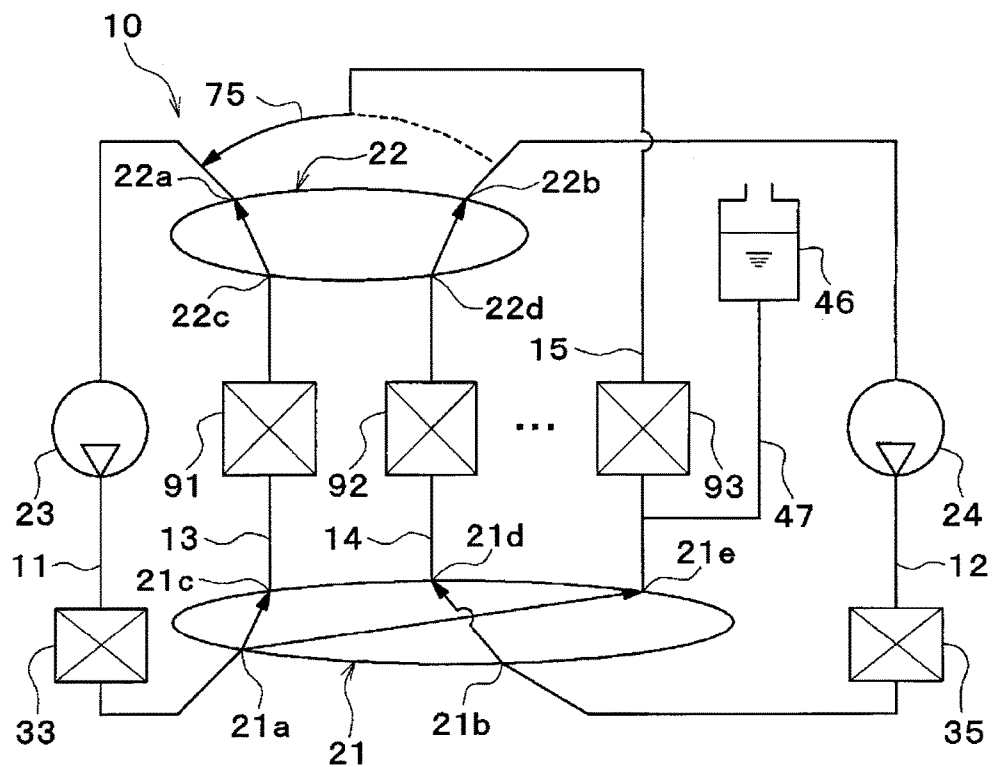


FIG. 18

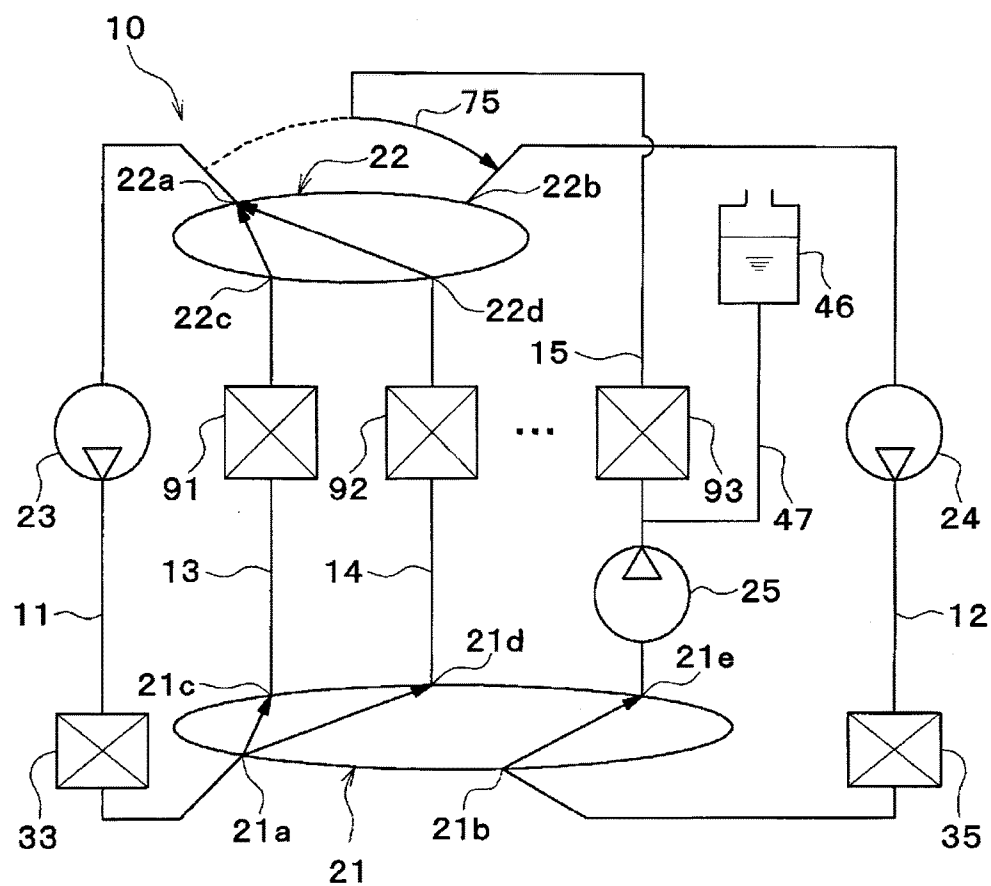


FIG. 19

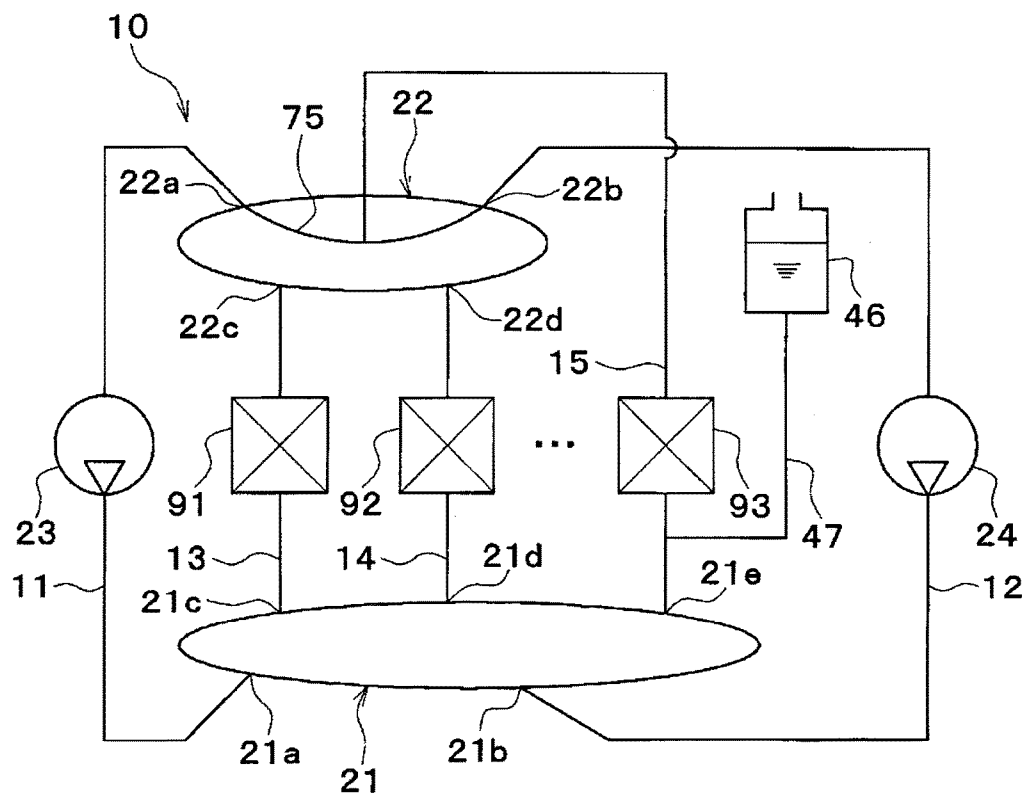


FIG. 20

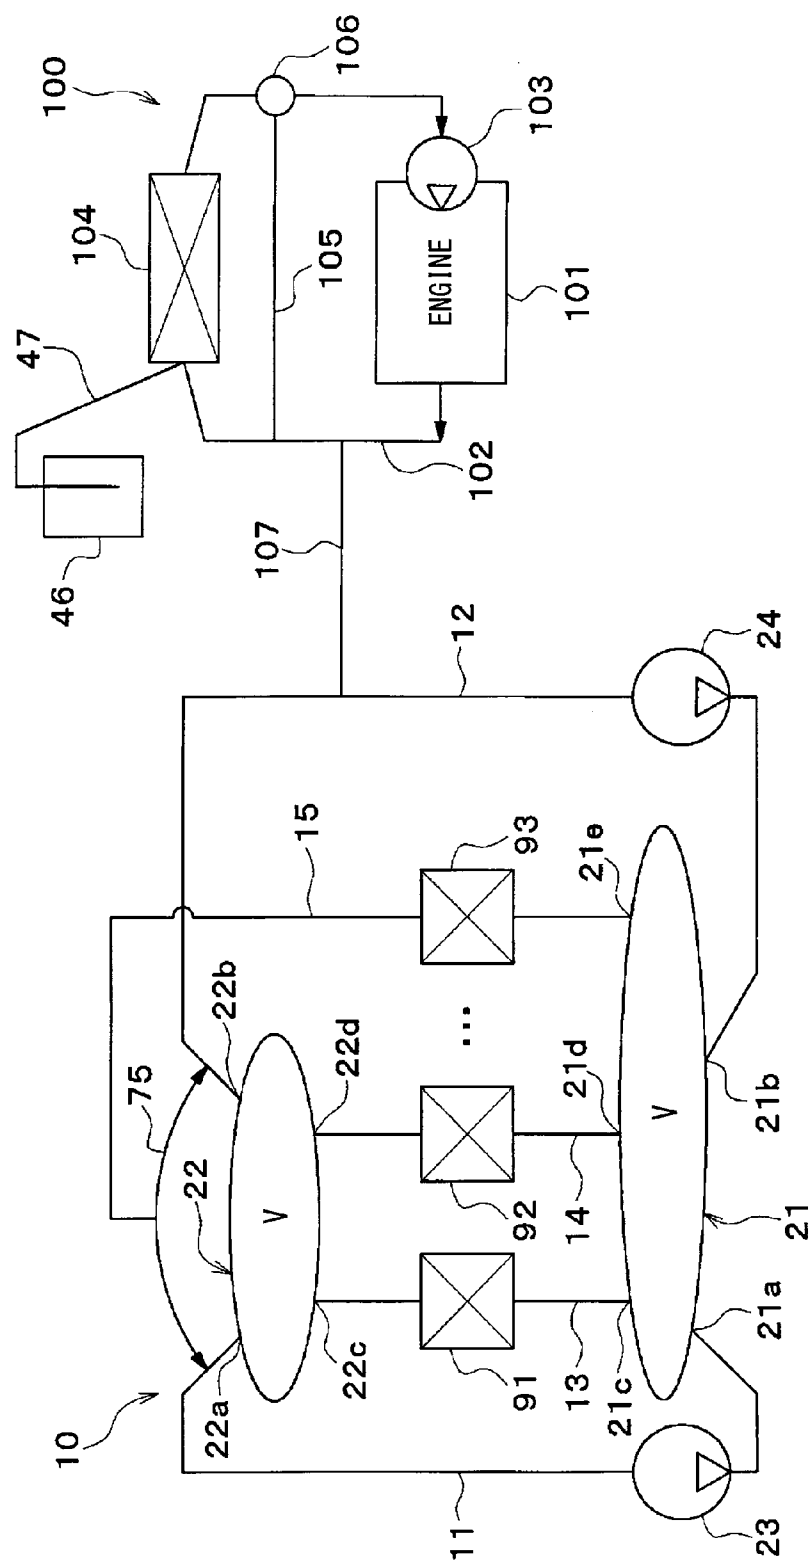


FIG. 21


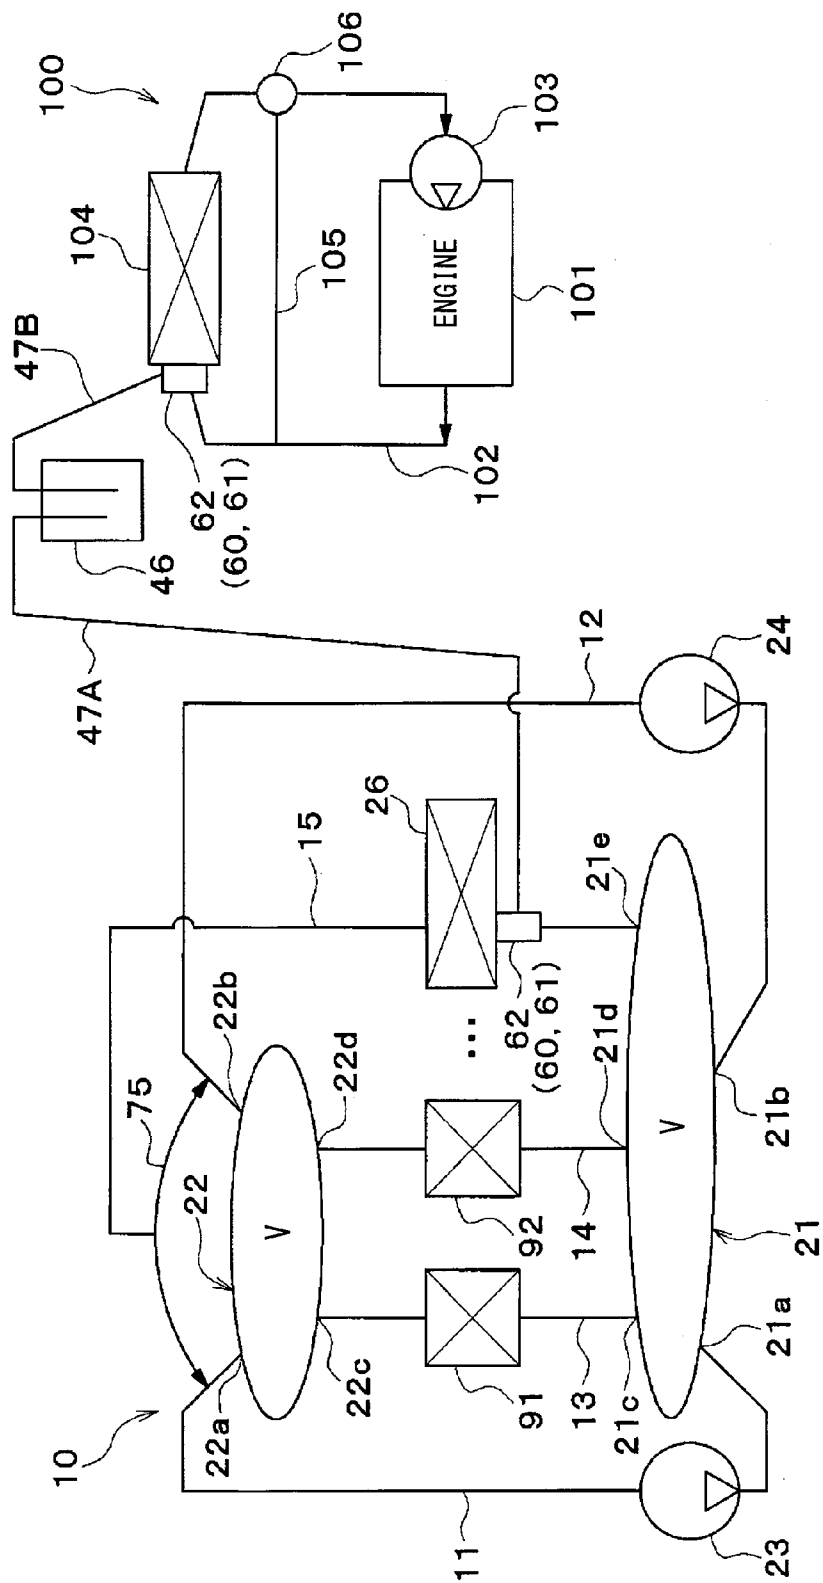


FIG. 22

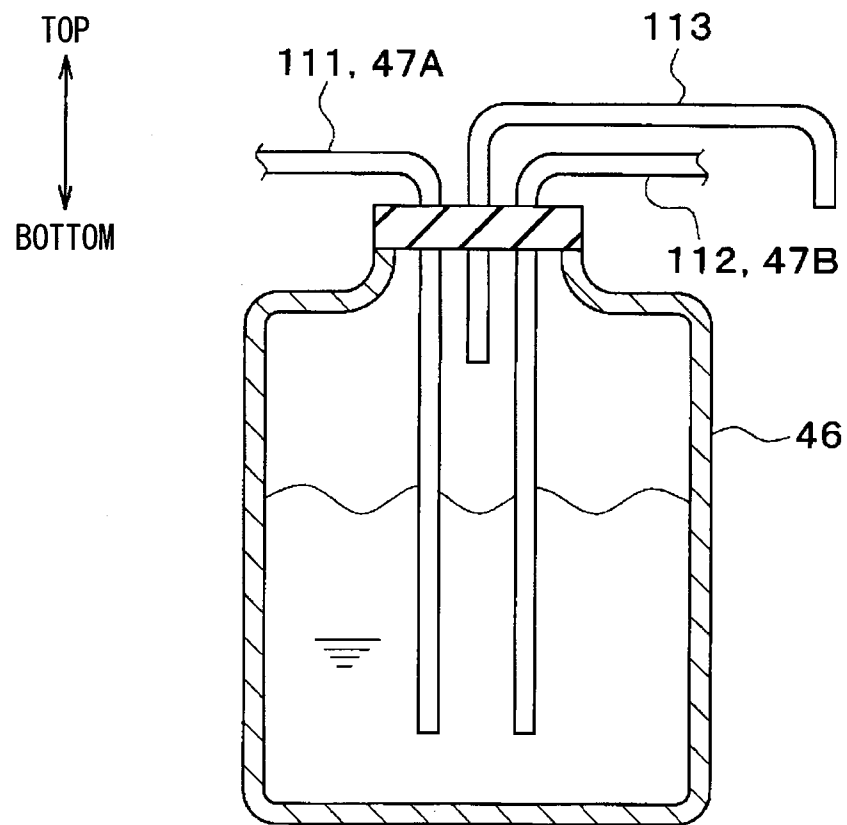

1

**THERMAL MANAGEMENT SYSTEM FOR
VEHICLE****CROSS REFERENCE TO RELATED
APPLICATIONS**

This application is a U.S. National Phase Application under 35 U.S.C. 371 of International Application No. PCT/JP2013/004986 filed on Oct. 23, 2013 and published in Japanese as WO 2014/034062 A1 on Mar. 6, 2014. This application is based on and claims the benefit of priority from Japanese Patent Applications No. 2012-187153 filed on Aug. 28, 2012, and No. 2013-139568 filed on Jul. 3, 2013. The entire disclosures of all of the above applications are incorporated herein by reference.

FIELD OF THE INVENTION

The preset disclosure relates to a thermal management system used for a vehicle.

BACKGROUND ART

Conventionally, as disclosed in Patent Document 1, a thermal management system includes a first coolant loop for exchanging heat with a battery system, a second coolant loop for exchanging heat with at least one drive train component, and a valve for switching between a first mode of operating the two coolant loops in parallel and a second mode of operating the two coolant loops in series.

In the related art, the first coolant loop includes a first coolant reservoir, and the second coolant loop includes a second coolant reservoir. The first reservoir and the second reservoir are integrated together into a single dual-loop reservoir.

The coolant reservoir integrated as the single dual-loop reservoir is provided with a coolant passage for connecting chambers for the first and second coolant reservoirs. The single coolant reservoir allows the coolant to flow through between the first coolant reservoir and the second coolant reservoir.

RELATED ART DOCUMENT**Patent Document**

Patent Document 1: Japanese Unexamined Patent Application Publication No. 2011-255879

SUMMARY OF INVENTION

As a result of studies by the inventors of the present application, if there is a difference in pump output between the respective coolant loops in the first mode of operating the two coolant loops in parallel, a leak of the coolant may occur inside the valve. When the leak of the coolant occurs inside the valve, a small amount of coolant will continue to flow from one coolant loop with the high pump output at a high pressure to the other coolant loop with the low pump output at a low pressure.

The two coolant loops form a closed circuit to which the coolant cannot be supplied from the outside. Thus, when a small amount of coolant continues to flow from the high-pressure side coolant loop to a low-pressure side coolant loop, the amount of liquid in the high-pressure side coolant loop continues to decrease, while the amount of liquid in the low-pressure side coolant continues to increase. As a result,

2

the water level of the coolant in the low-pressure side chamber in the reserve tank continues to rise to push up the liquid surface thereof.

When the liquid surface of the coolant in the low-pressure side chamber reaches the level of a coolant passage, the coolant in the low-pressure side chamber flows into the high-pressure side chamber. Thus, a local loop circuit is formed between the reserve tank and the valve, which might waste the power from a pump or compressor.

Further, the above thermal management system in the related art just switches the two coolant loops between the series connection and parallel connection, and thus cannot arbitrarily switch and circulate a heat medium in a different temperature zone according to a temperature adjustment target device. As a result, it is difficult to adjust the temperature adjustment target device to an appropriate temperature depending on the situation.

The present disclosure has been made in view of the foregoing matters, and it is an object of the present disclosure to provide a thermal management system for a vehicle, which can suppress formation of a local loop circuit by a reserve tank, while switching a heat medium circulating through the temperature adjustment target device.

It is another object of the present disclosure to be capable of maintaining the pressure of a heat medium circuit within a predetermined range in a heat management system for a vehicle in which a plurality of heat medium circuits are formed by selectively connecting numerous flow paths together.

In order to achieve the above-mentioned object, a heat management system for a vehicle according to the present disclosure includes a first pump and a second pump, a temperature adjustment target device, a heat exchanger, numerous flow paths, a first switching portion, a second switching portion, and a reserve tank. The first and second pumps suck and discharge a liquid heat medium. The temperature adjustment target device has a temperature adjusted by the heat medium. The heat exchanger exchanges heat with the heat medium. The numerous flow paths are flow paths for circulation of the heat medium, and include a first pump arrangement flow path in which the first pump is disposed, a second pump arrangement flow path in which the second pump is disposed, and a device arrangement flow path in which at least one of the temperature adjustment target device and the heat exchanger is disposed. The first switching portion is connected to one end side of each of the numerous flow paths, and adapted to selectively establish communication between the numerous flow paths. The second switching portion is connected to the other end side of each of the numerous flow paths, and adapted to selectively establish communication between the numerous flow paths. The reserve tank stores therein the heat medium.

Furthermore, at least one of the numerous flow paths communicates with the first pump arrangement flow path to form a first heat medium circuit. The first switching portion and the second switching portion are operated such that at least another one of the numerous flow paths communicates with the second pump arrangement flow path to form a second heat medium circuit. The reserve tank is configured to set a pressure of a liquid surface of the heat medium stored to a predetermined pressure, and is connected to only one of the numerous flow paths.

Thus, the first and second switching portions can switch the communication state among the numerous flow paths to thereby switch the heat medium circulating through the temperature adjustment target device.

3

Further, the reserve tank is connected to only one flow path of the numerous flow paths, and thereby it can suppress the reserve tank from forming a local loop circuit.

Alternatively, a heat management system for a vehicle according to the present disclosure may include a first pump, a second pump, and a third pump, a temperature adjustment target device, a heat exchanger, numerous flow paths, a first switching portion, a second switching portion, a reserve tank, a circulation flow path, and at least one connection flow paths. The first, second, and third pumps suck and discharge the liquid heat medium. The temperature adjustment target device has the temperature adjusted by the heat medium. The heat exchanger exchanges heat with the heat medium. The numerous flow paths are flow paths for circulation of the heat medium, and include a first pump arrangement flow path in which the first pump is disposed, a second pump arrangement flow path in which the second pump is disposed, and a device arrangement flow path in which at least one of the temperature adjustment target device and the heat exchanger is disposed. The first switching portion is connected to one end side of each of the numerous flow paths, and adapted to selectively establish communication between the numerous flow paths. The second switching portion is connected to the other end side of each of the numerous flow paths, and adapted to selectively establish communication between the numerous flow paths. The reserve tank stores therein the heat medium. The circulation flow path is provided with the third pump to allow the heat medium to circulate therethrough. The connection flow path is provided with the third pump, thereby connecting the circulation flow path through which the heat medium circulates to at least one of the numerous flow paths.

Furthermore, at least one of the numerous flow paths communicates with the first pump arrangement flow path to form a first heat medium circuit. The first switching portion and the second switching portion are adapted to operate such that at least another one of the numerous flow paths communicates with the second pump arrangement flow path to form a second heat medium circuit. The reserve tank is connected to the circulation flow path such that a pressure of a liquid surface of the heat medium stored becomes a predetermined pressure.

Thus, the first and second switching portions can switch the communication state among the numerous flow paths to thereby switch the heat medium circulating through the temperature adjustment target device.

Further, the reserve tank is connected to only one flow path of the numerous flow paths via the circulation flow path, and thereby it can suppress the reserve tank from forming a local loop circuit.

Alternatively, a thermal management system for a vehicle according to the present disclosure may include a first pump and a second pump, a temperature adjustment target device, a heat exchanger, numerous flow paths, a first switching portion, a second switching portion, one or two reserve tanks, and a pressure adjustment valve. The first and second pumps suck and discharge the liquid heat medium. The temperature adjustment target device has the temperature adjusted by the heat medium. The heat exchanger exchanges heat with the heat medium to thereby change the temperature of the heat medium. The numerous flow paths are flow paths for circulation of the heat medium, and include a first pump arrangement flow path in which the first pump is disposed, a second pump arrangement flow path in which the second pump is disposed, and a device arrangement flow path in which at least one of the temperature adjustment

4

target device and the heat exchanger is disposed. The first switching portion is connected to one end side of each of the numerous flow paths, and adapted to selectively establish communication between the numerous flow paths. The second switching portion is connected to the other end side of each of the numerous flow paths, and adapted to selectively establish communication between the numerous flow paths. The reserve tank is connected to a predetermined flow path among the numerous flow paths to store therein the heat medium. The pressure adjustment valve opens when an internal pressure of the flow path with the reserve tank connected thereto among the numerous flow paths, or an internal pressure of the reserve tank exceeds the predetermined range.

Furthermore, at least one of the numerous flow paths communicates with the first pump arrangement flow path to form a first heat medium circuit. The first switching portion and the second switching portion are operated such that at least another one of the numerous flow paths communicates with the second pump arrangement flow path to form a second heat medium circuit.

Thus, when the internal pressure of the flow path with the reserve tank connected thereto among the numerous flow paths, or an internal pressure of the reserve tank exceeds the predetermined range, the pressure adjustment valve can close to maintain the pressure of the heat medium circuit within a predetermined range.

Alternatively, a heat management system for a vehicle according to the present disclosure may include a first pump, a second pump, and a third pump, a temperature adjustment target device, a heat exchanger, numerous flow paths, a first switching portion, a second switching portion, a circulation flow path, at least one connection flow path, one or two reserve tanks, and a pressure adjustment valve. The first, second, and third pumps suck and discharge the liquid heat medium. The temperature adjustment target device has a temperature adjusted by the heat medium. The heat exchanger exchanges heat with the heat medium to change the temperature of the heat medium. The numerous flow paths are flow paths for circulation of the heat medium, and include a first pump arrangement flow path in which the first pump is disposed, a second pump arrangement flow path in which the second pump is disposed, and a device arrangement flow path in which at least one of the temperature adjustment target device and the heat exchanger is disposed. The first switching portion is connected to one end side of each of the numerous flow paths, and adapted to selectively establish communication between the numerous flow paths. The second switching portion is connected to the other end side of each of the numerous flow paths, and adapted to selectively establish communication between the numerous flow paths. The circulation flow path is provided with the third pump to allow the heat medium to circulate therethrough. The connection flow path connects at least one of the numerous flow paths to the circulation flow path. The reserve tank is connected to a predetermined flow path among the numerous flow paths and the circulation flow paths, thereby storing therein the heat medium. The pressure adjustment valve opens when an internal pressure of the predetermined flow path or an internal pressure of the reserve tank exceeds a predetermined range.

Furthermore, at least one of the numerous flow paths communicates with the first pump arrangement flow path to form a first heat medium circuit. The first switching portion and the second switching portion are operated such that at

5

least another one of the numerous flow paths communicates with the second pump arrangement flow path to form a second heat medium circuit.

Thus, when the internal pressure of the flow path with the reserve tank connected thereto among the numerous flow paths and the circulation flow paths, or an internal pressure of the reserve tank exceeds the predetermined range, the pressure adjustment valve can close to maintain the pressure of the heat medium circuit within a predetermined range.

BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 is an entire configuration diagram of a thermal management system for a vehicle according to a first embodiment of the invention.

FIG. 2 is a block diagram showing an electric controller in the thermal management system for a vehicle in the first embodiment.

FIG. 3 is an entire configuration diagram of a thermal management system for a vehicle according to a second embodiment of the invention.

FIG. 4 is an entire configuration diagram of a thermal management system for a vehicle according to a third embodiment of the invention.

FIG. 5 is an entire configuration diagram of a thermal management system for a vehicle according to a fourth embodiment of the invention.

FIG. 6 is a cross-sectional view showing a negative pressure valve, a pressurizing valve, and a cap structure in the fourth embodiment.

FIG. 7 is an entire configuration diagram of a thermal management system for a vehicle according to a fifth embodiment of the invention.

FIG. 8 is a cross-sectional view of a reserve tank in the fifth embodiment.

FIG. 9 is an entire configuration diagram of a thermal management system for a vehicle according to a sixth embodiment of the invention.

FIG. 10 is a cross-sectional view of a reserve tank in the sixth embodiment.

FIG. 11 is an entire configuration diagram of a thermal management system for a vehicle according to a seventh embodiment of the invention.

FIG. 12 is an entire configuration diagram of a thermal management system for a vehicle according to an eighth embodiment of the invention.

FIG. 13 is an entire configuration diagram of a thermal management system for a vehicle according to a ninth embodiment of the invention.

FIG. 14 is an entire configuration diagram of a thermal management system for a vehicle according to a tenth embodiment of the invention.

FIG. 15 is a cross-sectional view of a second switching valve in the tenth embodiment.

FIG. 16 is an entire configuration diagram of a thermal management system for a vehicle, while showing one operation mode according to an eleventh embodiment of the invention.

FIG. 17 is an entire configuration diagram of the thermal management system for a vehicle, while showing another operation mode in the eleventh embodiment.

FIG. 18 is an entire configuration diagram of a thermal management system for a vehicle according to a first modified example of the eleventh embodiment.

FIG. 19 is an entire configuration diagram of a thermal management system for a vehicle according to a second modified example of the eleventh embodiment.

6

FIG. 20 is an entire configuration diagram of a thermal management system for a vehicle according to a twelfth embodiment of the invention.

FIG. 21 is an entire configuration diagram of a thermal management system for a vehicle according to a thirteenth embodiment of the invention.

FIG. 22 is a cross-sectional view of a reserve tank in the thirteenth embodiment.

DESCRIPTION OF EMBODIMENTS

In the following, preferred embodiments of the present invention will be described with reference to the accompanying drawings. The same or equivalent parts in the embodiments below are indicated by the same reference characters throughout the figures.

(First Embodiment)

Now, a first embodiment of the invention will be described. A thermal management system 10 for a vehicle shown in FIG. 1 is used to cool various temperature adjustment target device included in a vehicle (devices requiring cooling or heating) to an appropriate temperature.

In the first embodiment, the thermal management system 10 is applied to a hybrid vehicle that can obtain the driving force for traveling from both an engine (internal combustion engine) and a motor for traveling.

The hybrid vehicle can switch between a traveling state (HV traveling) in which a vehicle can travel by obtaining a driving force from both the engine and electric motor for traveling by causing the engine to operate or stop according to a traveling load on the vehicle and a remaining storage energy of a battery or the like, and another traveling state (EV traveling) in which the vehicle can travel by obtaining a driving force only from the electric motor for traveling by stopping the engine 10. Thus, the hybrid vehicle of this embodiment can improve the fuel efficiency as compared to the vehicle with only the engine as a drive source for traveling.

Further, the hybrid vehicle is configured as a plug-in hybrid car that can charge a battery (vehicle-mounted battery) mounted on the vehicle, with power supplied from an external power source (commercial power source) during stopping of the vehicle. For example, a lithium ion battery can be used as the battery.

A driving force output from an engine is used not only for traveling of the vehicle, but also for operating a generator. Power generated by the generator and power supplied from the external power source can be stored in the battery. The power stored in the battery can be supplied not only to the motor for traveling, but also to various vehicle-mounted devices, such as electric components included in a cooling system.

As shown in FIG. 1, the thermal management system 10 includes numerous flow paths 11 to 16, a first switching valve 21, a second switching valve 22, a first pump 23, a second pump 24 (a plurality of pumps), and a radiator 26 (heat exchanger).

A number of flow paths 11 to 16 are coolant flow paths through which the coolant flows. The flow paths 11 to 16 are formed of a solid pipe made of resin material (nylon, polyphthalamide, or the like), metal material (SUS), etc., a hose pipe made of rubber material (EPDM), or the like.

The coolant is a fluid as the thermal medium. A liquid containing at least ethylene glycol, dimethylpolysiloxane, or a nano-fluid is used as the coolant.

The numerous flow paths **11** to **16** each have one end side thereof connected to the first switching valve **21**, and the other end side thereof connected to the second switching valve **22**.

The first switching valve **21** has a first inlet **21a** and a second inlet **21b** into which the coolant flows, and a first outlet **21c**, a second outlet **21d**, a third outlet **21e**, and a fourth outlet **21f** from which the coolant flows. The first switching valve **21** is a first switch for switching among communication states between the first and second inlets **21a** and **21b** and the first to fourth outlets **21c**, **21d**, **21e**, and **21f**.

The first inlet **21a** is connected to one end side of the first flow path **11** among the numerous flow paths **11** to **16**. The second inlet **21b** is connected to one end side of the second flow path **12** among the numerous flow paths **11** to **16**.

The first outlet **21c** is connected to one end side of the third flow path **13** among the numerous flow paths **11** to **16**. The second outlet **21d** is connected to one end side of the fourth flow path **14** among the numerous flow paths **11** to **16**. The third outlet **21e** is connected to one end side of the fifth flow path **15** among the numerous flow paths **11** to **16**. The fourth outlet **21f** is connected to one end side of the sixth flow path **16** among the numerous flow paths **11** to **16**. Thus, the first switching valve **21** allows the numerous flow paths **11** to **16** to selectively communicate with each other.

The second switching valve **22** has a first outlet **22a** and a second outlet **22b** from which the coolant flows, and a first inlet **22c**, a second inlet **22d**, a third inlet **22e**, and a fourth inlet **22f** into which the coolant flows. The second switching valve **22** is a second switch for switching the communication state among the first and second outlets **22a** and **22b** and the first to fourth inlets **22c** to **22f**.

The first outlet **22a** is connected to the other end side of the first flow path **11** among the numerous flow paths **11** to **16**. The second outlet **22b** is connected to the other end side of the second flow path **12** among the numerous flow paths **11** to **16**.

The first inlet **22c** is connected to the other end side of the third flow path **13** among the numerous flow paths **11** to **16**. The second inlet **22d** is connected to the other end side of the fourth flow path **14** among the numerous flow paths **11** to **16**. The third inlet **22e** is connected to the other end side of the fifth flow path **15** among the numerous flow paths **11** to **16**. The fourth inlet **22f** is connected to the other end side of the sixth flow path **16** among the numerous flow paths **11** to **16**. Thus, the second switching valve **22** allows the numerous flow paths **11** to **16** to selectively communicate with each other.

Each of the first pump **23** and the second pump **24** is an electric pump for sucking and discharging the coolant. The first pump **23** is disposed in the first flow path **11** (first pump arranged flow path), and the second pump **24** is disposed in the second flow path **12** (second pump arranged flow path). Both the first pump **23** and the second pump **24** are arranged to allow the coolant to be sucked from a side of the second switching valve **22** and discharged toward a side of the first switching valve **21**.

The radiator **26** is a heat exchanger (air-heat medium heat exchanger) for heat dissipation that dissipates heat of the coolant into the outside air by exchanging the heat between the coolant and the air outside the vehicle compartment (hereinafter referred to as an outside air). The radiator **26** is disposed between the first pump **23** and the second switching valve **22** in the first flow path **11**.

Although not shown in the figure, the radiator **26** is disposed at the foremost part of the vehicle. The outside air

is blown to the radiator **26** by an exterior blower **27**. During traveling of the vehicle, the radiator **26** can face the traveling air.

A part of the first flow path **11** on the side of the second switching valve **22** with respect to the radiator **26** is connected to one end side of a bypass flow path **28** via a three-way valve **29**. Another part of the first flow path **11** on the side of the first switching valve **21** with respect to the radiator **26** is connected to the other end side of the bypass flow path **28**. The three-way valve **29** switches between the flow of the heat medium in the first flow path **11** through the radiator **26**, and the flow of the heat medium through the bypass flow path **28**.

In the third flow path **13** (device arrangement flow path), an inverter **31** and an electric motor **32** for traveling which are temperature adjustment target devices are arranged in series. A multi-way valve (not shown) may be disposed to control the distribution of the flow paths so as to timely switch between the parallel connection and series connection as the arrangement relationship between the inverter **31** and the motor **32**, and/or to timely restrict one of the flow rates of the inverter **31** and the motor **32**.

The inverter **31** is a power conversion device that converts a direct-current (DC) power supplied from the battery to an alternating-current (AC) power to output the AC voltage to an electric motor for traveling, thereby constituting a power control unit.

The power control unit is a component for controlling the output from the battery so as to drive the motor for traveling. The power control unit includes a booster converter for increasing the voltage of the battery, and the like, in addition to the inverter **31**.

Inside the inverter **31**, a coolant flow path for allowing the coolant to flow therethrough is formed, whereby the inverter **31** is cooled by flowing the coolant in the coolant flow path. The inverter **31** preferably has its temperature maintained at 65° C. or lower in terms of thermal damage to the semiconductor element therein, and for the purpose of preventing the degradation thereof, and the like.

The electric motor **32** for traveling has functions of serving as an electric motor (motor) for converting an electric energy into a mechanical energy, such as rotation of an output shaft, and of serving as an electric generator (generator) for converting the rotation of the output shaft (mechanical energy) into an electric energy.

In the fourth flow path **14** (device arrangement flow path), an chiller **33** as a heat exchanger and a cooler core **34** as temperature adjustment target device are arranged in series to each other. The chiller **33** is a heat exchanger for coolant cooling (heat medium cooler) that cools the coolant by exchanging heat between a low-pressure refrigerant (low-temperature refrigerant) of a refrigeration cycle **40** and the coolant. The cooler core **34** is a heat exchanger for air cooling (air heat medium heat exchanger) that cools the air by exchanging heat between the coolant cooled by the chiller **33** and the air to be blown into the vehicle interior.

A multi-way valve (not shown) may be disposed to control the distribution of the flow paths so as to timely switch between the parallel connection and series connection as the arrangement relationship between the cooler core **34** and the chiller **33**, and/or to timely restrict one of the flow rates of the cooler core **34** and the chiller **33**.

In the fifth flow path **15** (device arrangement flow path), a condenser **35** as a heat exchanger and a heater core **36** as temperature adjustment target device are arranged in series to each other. The condenser **35** is a heat exchanger for coolant heating (heat medium heater) that heats the coolant

by exchanging heat between the coolant and a high-pressure refrigerant (high-temperature refrigerant) of the refrigeration cycle 40. The heater core 36 is a heat exchanger for air heating (air heat medium heat exchanger) that heats the air by exchanging heat between the coolant cooled by the condenser 35 and the air blown into the vehicle interior.

A multi-way valve (not shown) may be disposed to control the flow paths so as to timely switch between the parallel connection and series connection of the arrangement relationship between the heater core 36 and the condenser 35, or to timely restrict one of the flow rates at the heater core 36 and the condenser 35, or so as to open and close the communication with a connection flow path 107.

In the sixth flow path 16 (device arrangement flow path), the battery 37 as the temperature adjustment target device is disposed. Inside the battery 37, a flow path for a battery that allows the coolant to flow therethrough is formed, whereby the battery 37 is cooled by flowing the coolant through the flow path for the battery. The battery 37 preferably has its temperature maintained to about 10 to 40° C. for the purpose of preventing the reduction in output, charging efficiency, degradation, and the like.

In the sixth flow path 16, a heat exchanger for battery cooling may be provided for cooling or heating the battery 37 by exchanging heat between the coolant (heat medium) and air, instead of the battery 37, to guide the air to the battery 37.

The refrigeration cycle 40 is a vapor compression refrigerator. In this embodiment, the refrigeration cycle 40 employs a fluorocarbon refrigerant as the refrigerant, and thus forms a subcritical refrigeration cycle whose high-pressure side refrigerant pressure does not exceed the critical pressure of the refrigerant.

The refrigeration cycle 40 includes not only the chiller 33 serving as a low-pressure side heat exchanger and the condenser 35 serving as a high-pressure side heat exchanger, but also a compressor 41 and an expansion valve 42.

The compressor 41 is an electric compressor driven by an electric power supplied from the battery. The compressor 41 is adapted to suck gas-phase refrigerant and to compress and discharge the refrigerant. The compressor 41 may be rotatably driven by the engine via a pulley, a belt, and the like. The high-temperature and high-pressure gas-phase refrigerant discharged from the compressor 41 exchanges heat with the coolant by the condenser 35 as the high-pressure side heat exchanger to have its heat absorbed to be condensed.

The expansion valve 42 is a decompressor for decompressing and expanding a liquid-phase refrigerant condensed by the condenser 35. The refrigerant decompressed and expanded by the expansion valve 42 exchanges heat with the coolant in the chiller 33 to absorb heat from the coolant and to evaporate itself. The gas-phase refrigerant evaporated at the chiller 33 is sucked into and compressed by the compressor 41.

The refrigeration cycle 40 may be provided with an internal heat exchanger (not shown) for exchanging heat between the refrigerant discharged from the condenser 35 and the refrigerant discharged from the chiller 33.

The chiller 33 cools the coolant by the low-pressure refrigerant in the refrigeration cycle 40, and thus can cool the coolant to a lower temperature as compared to the radiator 26 for cooling the coolant with the outside air.

Specifically, the radiator 26 cannot cool the coolant to a temperature lower than that of the outside air, whereas the chiller 33 can cool the coolant to a temperature lower than that of the outside air.

The cooler core 34 and the heater core 36 are disposed in an air passage formed inside a casing 43 of an interior air conditioning unit. Specifically, in the air passage within the casing 43, the heater core 36 is disposed on the downstream side of the air flow with respect to the cooler core 34.

Through the air passage within the casing 43, the air blown by an interior blower 44 flows. An air mix door 45 is disposed in between the cooler core 34 and the heater core 36 within the casing 43. The air mix door 45 serves as an air volume ratio adjuster that adjusts a ratio of the air volume of the air passing through the heater core 36 to that of the air bypassing the cooler core 34.

A reserve tank 46 is connected to the first flow path 11. Specifically, the reserve tank 46 includes a main inflow-outflow port 46a and a sub-inflow-outflow port 46b as an inflow-outflow port for inflow and outflow of the coolant. The main inflow-outflow port 46a is connected to a part of the first flow path 11 between the radiator 26 and the first pump 23 via a main connection flow path 47. The sub-inflow-outflow port 46b is connected to a part of the first flow path 11 between the first pump 23 and the first switching valve 21 via a sub-connection flow path 48.

The main connection flow path 47 and the sub-connection flow path 48 are flow paths for circulation of the coolant. Each of the main connection flow path 47 and the sub-connection flow path 48 is a tank connection flow path for connecting the reserve tank 46 to a predetermined flow path.

The sub-connection flow path 48 is provided with a flow path throttle 49. Thus, the flowing resistance of the sub-connection flow path 48 (resistance of the flow of coolant) is larger than that of the main connection flow path 47. Instead of the flow path throttle 49, a shut valve capable of closing the flow path may be disposed in the sub-connection flow path 48.

The reserve tank 46 is an air-release container (heat medium storage) for storing the coolant therein. Thus, the pressure at the liquid surface of the coolant stored in the reserve tank 46 becomes atmospheric pressure. The reserve tank 46 may be configured such that the pressure at the liquid surface of the coolant stored in the reserve tank 46 becomes a predetermined pressure (pressure different from the atmospheric pressure).

Excessive coolant is stored in the reserve tank 46, and thereby it can suppress the decrease in liquid amount of the coolant circulating through the respective flow paths. The reserve tank 46 has a function of separating the air bubbles mixed in the coolant, into gas and liquid components.

Because the flow path throttle 49 is disposed in the sub-connection flow path 48, it can suppress the flow of the coolant from the first flow path 11 into the reserve tank 46 through the sub-connection flow path 48, thereby effectively separating bubble mixed in the coolant into gas and liquid components.

A connection part of the reserve tank 46 is sufficient to be disposed on the downstream side of the coolant flow with respect to at least one of the temperature adjustment target devices 31, 32, 34, 36, and 37 and the heat exchangers 26, 33, and 35, and on the suction side of at least one of the first pump 23 and the second pump 24.

In this embodiment, the end of the main connection flow path 47 opposite to the reserve tank 46 is connected to the part of the first flow path 11 on the suction side of the first pump 23. On the other hand, the end of the sub-connection flow path 48 opposite to the reserve tank 46 is connected to the part of the first flow path 11 on the discharge side of the first pump 23.

11

Next, the details of the first and second switching valves **21** and **22** will be described. The first and second switching valves **21** and **22** have the same basic structure to each other. However, the first switching valve **21** differs from the second switching valve **22** in that an inlet for coolant and an outlet for fluid are reversed to each other.

The first switching valve **21** includes a first flow path **211** in communication with the first inlet **21a**, and a second flow path **212** in communication with the second inlet **21b**.

The first switching valve **21** includes four communication spaces **213** provided corresponding to the first outlet **21c**, the second outlet **21d**, the third outlet **21e**, and the fourth outlet **21f**. The respective communication spaces **213** allow the outlets **21c** to **21f** to communicate with the first flow path **211** and the second flow path **212**.

A door type valve body **214** is disposed in each communication space **213**. The valve body **214** is switched between a first position for fully opening the first flow path **211** while completely closing the second flow path **212**, and a second position for completely closing the first flow path **211** while fully opening the second flow path **212**. The valve body **214** is also operated to an intermediate position where an opening ratio of the first flow path **211** side to the second flow path **212** side is arbitrarily selectable.

Each valve body **214** is driven by an electric actuator (not shown). The number of electric actuators may be the same as that of the valve bodies **214**, or smaller than that of the valve bodies **214**. When the number of the electric actuators is smaller than that of the valve bodies **214**, the electric actuators and the respective valve bodies **214** may be coupled together via a link mechanism or gear mechanism to communicatively drive the respective valve bodies **214**.

Likewise, the second switching valve **22** also includes a first flow path **221** in communication with the first outlet **22a**, and a second flow path **222** in communication with the second outlet **22b**.

The second switching valve **22** has four communication spaces **223** corresponding to the respective first inlets **22c** to **22f**. The respective communication spaces **223** allow the first inlets **22c** to **22f** to communicate with the first flow path **221** and the second flow path **222**.

A door type valve body **224** is disposed in each communication space **223**. The valve body **224** is switched between a first position for fully opening the first flow path **221** while completely closing the second flow path **222**, and a second position for completely closing the first flow path **221** while fully opening the second flow path **212**. The valve body **224** is also operated to an intermediate position where an opening ratio of the first flow path **221** side to the second flow path **222** side is optionally selectable.

Each valve body **224** is driven by an electric actuator (not shown). The number of electric actuators may be the same as that of the valve bodies **224**, or smaller than that of the valve bodies **224**. When the number of the electric actuators is smaller than that of the valve bodies **224**, the electric actuators and the respective valve bodies **224** may be coupled together via a link mechanism or gear mechanism to communicatively drive the respective valve bodies **224**.

The first switching valve **21** may include a plurality of valve bodies. The second switching valve **22** may include a plurality of valve bodies. The valve body of the first switching valve **21** may be mechanically coupled to the valve body of the second switching valve **22**. The valve body of the first switching valve **21** and the valve body of the second switching valve **22** may be integrally formed together.

Now, the leakage from the first and second switching valves **21** and **22** will be described below. For example,

12

when there is a difference in pressure between the inlets **21a** and **21b** and the outlet **21c** to **21f** of the first switching valve **21**, even though the valve body **214** is operated to the position for completely closing the first flow path **211** or the second flow path **212**, the valve body **214** is slightly open according to the difference in pressure, causing the leakage of coolant. Hereinafter, such a leakage of the coolant is referred to as a "valve leakage", and the amount of leakage of the coolant is referred to as a "leaking amount".

The leaking amount changes depending on a seal structure of the valve body **214**, and a holding force for holding the valve body **214** in the position. Thus, in order to decrease the leaking amount, a strong seal structure, and a powerful electric actuator are required. However, when adopting the strong seal structure and the powerful electric actuator, a slight valve leakage is actually inevitable because of an increase in volume or weight of the entire system.

Likewise, in the second switching valve **22**, for example, when there is a difference in pressure between the outlets **22a** and **22b** and the inlet **22c** to **22f** of the second switching valve **22**, even though the valve body **224** is operated to the position for completely closing the first flow path **221** or the second flow path **222**, the valve body **214** is slightly open according to the difference in pressure, causing the valve leakage.

Now, an electric controller of the thermal management system **10** will be described with reference to FIG. 2. A controller **50** is comprised of a known microcomputer, including CPU, ROM, RAM, and the like, and a peripheral circuit thereof. The controller **50** is a control device for controlling the operations of the devices connected to the output side, including the first pump **23**, the second pump **24**, the compressor **41**, an electric actuator **51** of the first switching valve **21**, and an electric actuator **52** of the second switching valve **22**, and the like by performing various kinds of computations and processing based on air conditioning control programs stored in the ROM.

The controller **50** is integrally structured with a control unit for controlling various control target devices connected to the output side of the controller. The control unit for controlling the operation of each of the control target devices includes a structure (hardware and software) adapted to control the operation of each of the control target devices.

In particular, a switching valve controller **50a** has the structure (hardware and software) for controlling the operations of the electric actuator **51** of the first switching valve **21**, and the electric actuator **52** of the second switching valve **22**. Obviously, the switching valve controller **50a** may be independently provided from the controller **50**.

Detection signals from a group of sensors, including an inside air sensor **53**, an outside air sensor **54**, a solar radiation sensor **55**, and a humidity sensor **56** and the like are input to the input side of the controller **50**.

The inside air sensor **53** is a detector (inside air temperature detector) for detecting the temperature of inside air (or the temperature of the vehicle interior). The outside air sensor **54** is a detector (outside air temperature detector) for detecting the temperature of outside air. The solar radiation sensor **55** is a detector (solar radiation amount detector) for detecting the amount of solar radiation onto the vehicle interior. The humidity sensor **56** is a detector (humidity detector) for detecting the humidity of the vehicle interior.

An operation panel **58** is disposed near an instrument board at the front of the vehicle compartment. Operation signals are input from various types of air conditioning operation switches provided on the operation panel **58**, to the input side of the controller **50**. The various types of air

13

conditioning operation switches provided in the operation panel **58** include an air conditioner switch, an automatic switch, an air volume setting switch, a vehicle-interior temperature setting switch, and the like.

The air conditioner switch is a switch for switching between operating and stopping (on and off) of air conditioning (cooling or heating). The automatic switch is a switch for setting or resetting automatic control of the air conditioning. The air volume setting switch is a switch for setting the volume of air from the interior blower. The vehicle-interior temperature setting switch serves as target temperature setting means for setting a target vehicle interior temperature set by a passenger's operation.

Now, the operation of the above-mentioned structure will be described. The controller **50** controls the operations of the electric actuator **51** of the first switching valve **21** and the electric actuator **52** of the second switching valve **22** to switch among various kinds of operation modes.

Specifically, the first flow path **11** and at least one of the third to sixth flow paths **13** to **16** form a first coolant circulation circuit (first heat medium circuit). The second flow path **12** and the remaining flow path among the third to sixth flow paths **13** to **16** form a second coolant circulation circuit (second heat medium circuit).

In each of the third to sixth flow paths **13** to **16**, switching can be performed between the connection to the first coolant circulation circuit and the connection to the second coolant circulation circuit depending on the situation, thereby adjusting each temperature adjustment target device to an appropriate temperature according to the situation.

Alternatively, one or some of the third to sixth flow paths **13** to **16** may be connected to both the first coolant circulation circuit and the second coolant circulation circuit, thereby mixing and circulating the coolant in the first coolant circulation circuit and the coolant in the second coolant circulation circuit.

In the example shown in FIG. 1, the first switching valve **21** and the second switching valve **22** are switched such that the first, third, and fifth flow paths **11**, **13**, and **15** communicate with each other, and that the second, fourth, and sixth flow paths **12**, **14**, and **16** communicate with each other.

Thus, the first coolant circulation circuit (high-temperature coolant circuit) indicated by thick solid lines in FIG. 1 and the second coolant circulation circuit (low-temperature coolant circuit) indicated by thick alternate long and short dash lines in FIG. 1 are formed.

In the first coolant circulation circuit, the coolant circulates through among the radiator **26**, inverter **31**, electric motor **32** for traveling, condenser **35**, and heater core **36**. Thus, the waste heat from the inverter **31**, electric motor **32** for traveling, and condenser **35** is dissipated from the radiator **26** and heater core **36**, and thereby it can cool the inverter **31**, electric motor **32** for traveling, and condenser **35**.

In the second coolant circulation circuit, the coolant circulates through among the chiller **33**, cooler core **34**, and battery **37**. Thus, the coolant cooled by the chiller **33** to a temperature lower than the outside air temperature can cool the cooler core **34** and the battery **37**. By cooling the cooler core **34**, the vehicle interior can be cooled.

Further, in the example shown in FIG. 1, the valve body **224** corresponding to the fourth inlet **22f** is slightly open on the first flow path **211** side such that the first coolant circulation circuit communicates with the second coolant circulation circuit in the second switching valve **22**. As a result, a communication flow path R for communication

14

between the first coolant circulation circuit and the second coolant circulation circuit is formed within the second switching valve **22**.

At this time, the opening degree of the valve body **224** corresponding to the fourth inlet **22f** is adjusted such that the flow rate of coolant in the communication flow path R is more than each of the leakage amount from the first switching valve **21** and the leakage amount from the second switching valve **22**.

The reserve tank **46** is connected to the first flow path **11** (first circuit formation flow path) forming the first coolant circulation circuit. When the volume of the coolant expands or contracts together with the changes in temperature of the coolant in the first coolant circulation circuit, thereby changing the pressure of the first coolant circulation circuit, the first coolant circulation circuit can exchange the coolant with the reserve tank **46**. Thus, the pressure of the first coolant circulation circuit can be maintained within an appropriate range.

The second coolant circulation circuit is connected to the first coolant circulation circuit via the communication flow path R. When the volume of the coolant expands or contracts together with the changes in temperature of the coolant in the second coolant circulation circuit, thereby changing the pressure of the second coolant circulation circuit, the second coolant circulation circuit can exchange the coolant with the reserve tank **46**. Thus, the pressure of the second coolant circulation circuit can be maintained within an appropriate range.

The reserve tank **46** is connected to the first flow path **11**, and not connected to the second flow path **12**. In other words, the reserve tank **46** is connected to only one flow path **11** of the first to sixth flow paths **11** to **16**.

Thus, the coolant is not exchanged between the first coolant circulation circuit and the second coolant circulation circuit via the reserve tank **46**. As a result, when there is a difference in output between the first pump **23** and the second pump **24**, the waste of the pump power due to the local formation of the loop circuit and the loss of heat due to the mixing of the coolant having a different temperature zone can be prevented.

The reserve tank **46** is connected to the downstream side of the coolant flow with respect to the radiator **26**, and to the suction side of the first pump **23** in the first coolant circulation circuit, so that the pressure on the suction side of the first pump **23** becomes substantially the atmospheric pressure. This embodiment can prevent an increase in pressure loss due to the occurrence of cavitation and the breakdown of a coolant hose that might be caused when the pressure on the suction side of the first pump **23** becomes a negative pressure.

The communication flow path R for communication between the first and second coolant circulation circuits is formed in the second switching valve **22** positioned on the downstream side (pump suction side). The phrase "the second switching valve **22** is positioned on the downstream side (pump suction side)" as used herein means that the second switching valve **22** is positioned on the downstream side of the coolant flow with respect to at least one of the temperature adjustment target devices **31**, **32**, **34**, **36**, and **37** and the heat exchangers **26**, **33**, and **35** which are disposed in the first to sixth flow paths **11** to **16**, as well as on the suction side of the first and second pumps **23** and **24**. In the example shown in FIG. 1, the second switching valve **22** is positioned on the downstream side of the coolant flow with respect to the battery **37**, as well as on the suction side of the first and second pumps **23** and **24**.

15

In this way, because the communication flow path R is formed in the second switching valve 22 positioned on the downstream side (pump suction side), it can prevent a part of the second coolant circulation circuit from having a negative pressure in the operation state where the lifting height of the first pump 23 is lower than that of the second pump 24. The reason for this will be described below.

For better understanding, in the description below, the operating state is assumed in which the first pump 23 is stopped and the second pump 24 is operating with a predetermined range of lift.

When the first pump 23 is stopped, the air-release reserve tank 46 is connected to the first coolant circulation circuit, whereby any part of the first coolant circulation circuit has substantially the atmospheric pressure. At this time, the first pump 23 and the second pump 24 differ from each other in a range of lift, thereby generating a difference in pressure between the first and second coolant circulation circuits. Thus, the first switching valve 21 and the second switching valve 22 generate the valve leakage described above.

When the valve leakage occurs in the first and second switching valves 21 and 22, the coolant is transferred between the first and second coolant circulation circuits in the respective first and second switching valve 21 and 22 in such a direction as to equalize the pressure or the like between these circulation circuits.

Suppose that when the communication flow path R is not formed and the amount of leakage on the upstream side (pump discharge side) is more than that of leakage on the downstream side (pump suction side), the pressures of the first and second coolant circulation circuits are equalized in the first switching valve 21 from which an amount of leakage is the most. As mentioned above, since the air-release reserve tank 46 is connected to the first coolant circulation circuit, when the first pump 23 is stopped, any part of the first coolant circulation circuit has substantially the atmospheric pressure. Regarding the pressure of the second coolant circulation circuit, the pressure of the first switching valve 21 becomes substantially the atmospheric pressure, and thus the pressure on the discharge side of the second pump 24 also becomes substantially the atmospheric pressure.

In this case, the pressure on the suction side of the second pump 24 becomes a pressure obtained by subtracting a pressure corresponding to the lifting height of the pump from the pressure on the discharge side of the second pump 24. As a result, the pressure on the suction side of the second pump 24 becomes a negative pressure.

In this way, in the case where the communication flow path R is not formed, when there is a difference in lifting height between the first pump 23 and the second pump 24, the pressure on the suction side of the second pump 24 becomes a negative pressure, so that it can cause the cavitation.

From this point, since in the first embodiment, the communication flow path R is formed in the second switching valve 22 positioned on the downstream side, the amount of transfer of the coolant between the first and second coolant circulation circuits becomes the most in the communication flow path R.

Thus, the pressures in the first and second coolant circulation circuits are equalized in the communication flow path R where the amount of transfer of the coolant becomes most. As a result, as to the pressure of the second coolant circulation circuit, the pressure at the second switching valve 22 becomes substantially atmospheric pressure, and thus the pressure on the suction side of the second pump 24 becomes

16

substantially atmospheric pressure. This arrangement can avoid the pressure on the suction side of the second pump 24 from being a negative pressure.

The valve leakage properties of the first and second switching valves 21 and 22 fluctuate depending on production tolerance (accumulation of size variation, and assembly variation). Thus, upon the mass production of the thermal management system 10 for a vehicle, it is supposed that in some thermal management systems, the amount of leakage from the first switching valve 21 is much more than that from the second switching valve 22, regardless of the difference in pressure between the first and second coolant circulation circuits.

(Second Embodiment)

Although in the first embodiment, the air-release reserve tank 46 is connected only to the first flow path 11, in a second embodiment of the invention, as shown in FIG. 3, the air-release reserve tank 46 is connected not only to the first flow path 11, but also to the second flow path 12.

The connection between the reserve tank 46 and the second flow path 12 is performed via the main connection flow path 47. The main connection flow path 47 is branched into two parts on the side opposite to the reserve tank 46, and the parts are connected to the first and second flow paths 11 and 12, respectively. The two parts 47a and 47b branched from the main connection flow path 47 are respectively provided with negative pressure valves 60. The sub-connection flow path 48 is provided with a pressurizing valve 61.

The negative pressure valve 60 operates to close when the internal pressure of the flow path is equal to or higher than atmospheric pressure, and to open when the internal pressure of the flow path is lower than the atmospheric pressure. Thus, when the internal pressure of the first coolant circulation circuit is less than the atmospheric pressure, the coolant in the reserve tank 46 is supplied to the first coolant circulation circuit. When the internal pressure of the second coolant circulation circuit is less than the atmospheric pressure, the coolant in the reserve tank 46 is supplied to the second coolant circulation circuit.

The pressurizing valve 61 is closed when the internal pressure of the flow path is lower than a preset pressure (108 kPa in this example) which is higher than the atmospheric pressure, and is open when the internal pressure of the flow path is equal to or higher than the preset pressure. Thus, when the internal pressure of the first coolant circulation circuit is equal to or higher than the preset pressure, the coolant in the first coolant circulation circuit is discharged to the reserve tank 46.

That is, the negative pressure valve 60 and the pressurizing valve 61 each configure a pressure adjustment valve that is adapted to be open when the internal pressure of the flow path exceeds a predetermined range.

The end of the main connection flow path 47 opposite to the reserve tank 46 is connected to the part on the suction side of the first pump 23 in the first flow path 11 as well as the part on the suction side of the second pump 24 in the second flow path 12.

Like the above-mentioned first embodiment, also in the second embodiment, the first switching valve 21 and the second switching valve 22 are switched to perform switching among various operation modes. In an example shown in FIG. 3, like the example shown in FIG. 1, the first, third, and fifth flow paths 11, 13, and 15 communicate with each other to thereby form the first coolant circulation circuit indicated by thick solid lines of FIG. 3, whereas the second, fourth, and sixth flow paths 12, 14, and 16 communicate

17

with each other to thereby form the second coolant circulation circuit indicated by thick alternate long and short dash lines of FIG. 3.

Further, in the example shown in FIG. 3, like the example shown in FIG. 1, the valve body 224 corresponding to the fourth inlet 22f is slightly open on the first flow path 211 side such that the first coolant circulation circuit communicates with the second coolant circulation circuit in the second switching valve 22. As a result, a communication flow path R for communication between the first coolant circulation circuit and the second coolant circulation circuit is formed within the second switching valve 22.

At this time, the opening degree of the valve body 224 corresponding to the fourth inlet 22f is adjusted such that the flow rate of coolant in the communication flow path R is more than each of the leakage amount from the first switching valve 21 and the leakage amount from the second switching valve 22.

The reserve tank 46 is connected to the first flow path 11 (first circuit formation flow path) via the negative pressure valve 60. When the pressure of the first coolant circulation circuit is lower than a first predetermined pressure (atmospheric pressure in this example) due to the contraction of the volume of the coolant together with a decrease in temperature of the coolant in the first coolant circulation circuit, the coolant can be supplied from the reserve tank 46 into the first coolant circulation circuit.

The reserve tank 46 is connected to the first flow path 11 (first circuit formation flow path) via the pressurizing valve 61. The coolant in the first coolant circulation circuit can be discharged into the reserve tank 46 when the pressure of the first coolant circulation circuit is equal to or higher than a second predetermined pressure (which is a preset pressure higher than the atmospheric pressure in this example) due to the expansion of the volume of the coolant together with an increase in temperature of the coolant in the first coolant circulation. As mentioned above, the pressure of the first coolant circulation circuit can be maintained within an appropriate range.

The reserve tank 46 is connected to the second flow path 12 (second circuit formation flow path) for forming the second coolant circulation circuit via the negative pressure valve 60. When the pressure of the second coolant circulation circuit is lower than the first predetermined pressure (the atmospheric pressure in this example), the coolant can be supplied from the reserve tank 46 into the second coolant circulation circuit.

The reserve tank 46 is connected to the downstream side of the coolant flow with respect to the radiator 26, and to the suction side of the first pump 23 in the first coolant circulation circuit, so that the pressure on the suction side of the first pump 23 becomes substantially the atmospheric pressure. This embodiment can prevent an increase in pressure loss due to the occurrence of cavitation and the breakdown of a coolant hose that might be caused when the pressure on the suction side of the first pump 23 becomes a negative pressure.

The reserve tank 46 is connected to the downstream side of the coolant flow with respect to the cooler core 34 and the battery 37, and to the suction side of the second pump 24 in the second coolant circulation circuit, so that the pressure on the suction side of the second pump 24 becomes substantially the atmospheric pressure. This embodiment can prevent an increase in pressure loss due to the occurrence of cavitation and the breakdown of a coolant hose that might be caused when the pressure on the suction side of the second pump 24 becomes a negative pressure.

18

The second coolant circulation circuit communicates with the first coolant circulation circuit via the communication flow path R. Thus, the pressure of the first coolant circulation circuit is also increased when the pressure of the second coolant circulation circuit is increased due to the increase in volume of the coolant together with the increase in temperature of the coolant of the second coolant circulation circuit. As a result, when the pressure of the first coolant circulation circuit is equal to or higher than the second predetermined pressure (preset pressure higher than the atmospheric pressure in this example), the coolant in the first coolant circulation circuit is discharged to the reserve tank 46. As mentioned above, the pressure of the second coolant circulation circuit can be maintained within an appropriate range.

The reserve tank 46 is connected to the first flow path 11 via the negative pressure valve 60 and the pressurizing valve 61. When the pressure of the first coolant circulation circuit is maintained within an appropriate range, the coolant cannot be transferred between the first and second coolant circulation circuits via the reserve tank 46. As a result, when there is a difference in output between the first pump 23 and the second pump 24, the waste of the pump power due to the local formation of the loop circuit can be prevented.

Like the above-mentioned first embodiment, because the communication flow path R is formed in the second switching valve 22 positioned on the downstream side, it can prevent a part of the second coolant circulation circuit from having a negative pressure in the operation state where the lifting height of the first pump 23 is lower than that of the second pump 24.

In the second embodiment, when the internal pressure of the first flow path 11 exceeds a predetermined range, the negative pressure valve 60 or pressurizing valve 61 is closed, so that the pressure of the first coolant circulation circuit can be maintained within a predetermined range. When the internal pressure of the second flow path 12 exceeds a predetermined range, the negative pressure valve 60 or pressurizing valve 61 is closed, so that the pressure of the second coolant circulation circuit can be maintained within a predetermined range. When the internal pressure of the reserve tank 46 exceeds a predetermined range, the negative pressure valve 60 or pressurizing valve 61 is closed, so that the internal pressure of the reserve tank 46 can be maintained within the predetermined range. (Third Embodiment)

Although in the second embodiment, the sub-connection flow path 48 is connected only to the first flow path 11, in a third embodiment of the invention, as shown in FIG. 4, the sub-connection flow path 48 is connected not only to the first flow path 11, but also to the second flow path 12.

The sub-connection flow path 48 is branched into two parts on the side opposite to the reserve tank 46, and the parts are connected to the first and second flow paths 11 and 12, respectively. The two branched parts 48a and 48b of the sub-connection flow path 48 are respectively provided with the pressurizing valves 61.

The end of the main connection flow path 47 opposite to the reserve tank 46 is connected to the part on the suction side of the first pump 23 in the first flow path 11 as well as the part on the suction side of the second pump 24 in the second flow path 12.

The end of the sub-connection flow path 48 opposite to the reserve tank 46 is connected to the part of the first pump arrangement flow path 11 on the discharge side of the first pump 23 as well as the part of the second pump arrangement flow path 12 on the discharge side of the second pump 24.

19

Like the above-mentioned first embodiment, the first switching valve 21 and the second switching valve 22 are switched to perform switching among various operation modes. In the example shown in FIG. 4, like the example shown in FIG. 1, the first, third, and fifth flow paths 11, 13, and 15 communicate with each other to thereby form the first coolant circulation circuit indicated by thick solid lines of FIG. 4, whereas the second, fourth, and sixth flow paths 12, 14, and 16 communicate with each other to thereby form the second coolant circulation circuit indicated by thick alternate long and short dash lines of FIG. 4.

As shown in FIG. 4, in the third embodiment, unlike the above-mentioned second embodiment, in the downstream side second switching valve 22, the valve body 224 corresponding to the fourth inlet 22f may completely close the first flow path 211 side so as not to form the communication flow path R for communication between the first and second coolant circulation circuits.

Like the second embodiment, because the reserve tank 46 is connected to the first flow path 11 (first circuit formation flow path) via the negative pressure valve 60 and the pressurizing valve 61, it can maintain the pressure of the first coolant circulation circuit within an appropriate range.

Further, because the reserve tank 46 is connected to the second flow path 12 (second circuit formation flow path) via the negative pressure valve 60 and the pressurizing valve 60, it can also maintain the pressure of the second coolant circulation circuit within an appropriate range.

The reserve tank 46 is connected to the first flow path 11 and the second flow path 12 via the negative pressure valve 60 and the pressurizing valve 61. Thus, when at least one of the pressure of the first coolant circulation circuit and the pressure of the second coolant circulation circuit is maintained within an appropriate range, the coolant cannot be transferred between the first and second coolant circulation circuits via the reserve tank 46. As a result, when there is a difference in output between the first pump 23 and the second pump 24, the waste of the pump power due to the local formation of the loop circuit and the loss of heat due to the mixing of the coolant having a different temperature zone can be prevented.

(Fourth Embodiment)

Although in the above-mentioned third embodiment, the negative pressure valve 60 is disposed in the main connection flow path 47, and the pressurizing valve 61 is disposed in the sub-connection flow path 48, in a fourth embodiment of the invention, as shown in FIG. 5, the negative pressure valve 60 and the pressurizing valve 61 are integrally disposed in the main connection flow path 47.

The negative pressure valve 60 and the pressurizing valve 61 are respectively provided in each of the two parts 47a and 47b into which the main connection flow path 47 is branched. In the fourth embodiment of the invention, the sub-inflow-outflow port 46b of the reserve tank 46 and the sub-connection flow path 48 are not provided.

As shown in FIG. 6, the negative pressure valve 60 and the pressurizing valve 61 are disposed in a cap structural portion 62 provided in each of the first and second flow paths 11 and 12. FIG. 6 illustrates the cap structural portion 62 provided in the first flow path 11.

The structure of the cap structural portion 62 provided in the second flow path 12 is the same as that of the cap structural portion 62 provided in the first flow path 11. Thus, the components corresponding to the cap structural portion 62 provided in the second flow path 12 are denoted by

20

reference characters within parentheses, and the description of the cap structural portion 62 provided in the second flow path 12 will be omitted.

The cap structural portion 62 includes a cylindrical portion 62a formed in a pipe member 63 constituting the first flow path 11 (second flow path 12), and a cap member 62b fitted into the cylindrical portion 62a. The internal space of the cylindrical portion 62a communicates with the first flow path 11 (second flow path 12). The cylindrical portion 62a is provided with a relief port 62d to which the main connection flow path 47a (47b) is connected.

The internal space of the cylindrical portion 62a is partitioned by a partition member 62c into a space 62e on a side of the first flow path 11 (second flow path 12) and a space 62f on a side of the cap member 62b. The space 62e on the cap member 62b side communicates with the main connection flow paths 47a and 47b via the relief port 62d.

The partition member 62c is provided with a valve port 62g for communication between both spaces 62e and 62f. The valve port 62g is opened and closed by a valve body 62h for a negative pressure valve and a valve body 62i for a pressurizing valve which are attached to the cap member 62b.

The valve body 62i for a pressurizing valve receives an urging force by a spring member 62j attached to the cap member 62b. The urging force of the spring member 62j causes the cap member 62b to close the valve port 62g until a preset pressure is exceeded.

In the fourth embodiment of the invention, because the negative pressure valve 60 and the pressurizing valve 61 are disposed in the cap structural portion 62, it can simplify the structure of pipe connection. Note that the cap structural portion 62 is also used as an inlet for charging the coolant thereto.

(Fifth Embodiment)

Although in the first embodiment, the air-release reserve tank 46 is disposed, in a fifth embodiment of the invention, as shown in FIG. 7, a sealed type reserve tank 65 is disposed in place of the air-release reserve tank 46.

The reserve tank 65 is a sealed type container (heat medium storage portion) for storing the coolant therein. Excessive coolant is stored in the reserve tank 65, and thereby it can suppress the decrease in liquid amount of the coolant circulating through the respective flow paths.

By using the sealed type reserve tank 65, fluctuations in liquid surface within the reserve tank 65 can be efficiently kept minimum even in an operation state where the range of lift of the first pump 23 is drastically different from that of the second pump 24.

The reserve tank 65 has a function of separating the air bubbles contained in the coolant, into gas and liquid components. The reserve tank 65 holds the pressure of the coolant at the appropriate pressure against abnormal increase and decrease in pressure due to the expansion and contraction caused by the change in temperature of the coolant.

As shown in FIG. 8, the reserve tank 65 has a main body 651 with an opening formed therein, and a lid member 652 for covering the opening of the main body 651. The lid member 652 is fitted into a cylindrical portion 651a formed around the opening of the main portion 651. The cylindrical portion 651a and lid member 652 are provided with a negative pressure valve 653 and a pressurizing valve 654.

The negative pressure valve 653 is open when an inner pressure of the tank is equal to or less than atmospheric pressure. The pressurizing valve 654 is open when an inner pressure of the tank exceeds a preset pressure that is equal

21

to or higher than the atmospheric pressure. Thus, the inner pressure of the tank can be maintained to the atmospheric pressure or more, and to a preset pressure or less.

That is, the negative pressure valve **653** and the pressurizing valve **654** each configure a pressure adjustment valve that is adapted to be open when the internal pressure of the reserve tank **65** exceeds a predetermined range.

The cylindrical portion **651a**, the lid member **652**, the negative pressure valve **653**, and the pressurizing valve **654** have the same structure as that of the cap structural portion **62** in the above-mentioned fourth embodiment. The relief port **651b** formed in the cylindrical portion **651a** is opened to the outside air.

A coolant inlet **65a** of the reserve tank **65** is formed above the main body **651**. The coolant inlet **65a** is connected to the sub-connection flow path **48**. A coolant outlet **65b** of the reserve tank **65** is formed under the main body **651**. The coolant outlet **65b** is connected to the main connection flow path **47**.

A partition wall **65e** is formed inside the main body **651** of the reserve tank **65** so as to partition the internal space of the tank into an inlet side space **65c** and an outlet side space **65d**. The partition wall **65e** can improve the gas-liquid separation function of the reserve tank **65**. In the example shown in FIG. 8, the opening covered by the lid member **652** of the main body **651** is formed on a side of the outlet side space **65d**.

Communication holes **65f** and **65g** for communication between the inlet side space **65c** and the outlet side space **65d** are formed in a lower part and an upper part of the partition wall **65e**, respectively. The communication hole **65f** formed in the lower part of the partition wall **65e** is a hole for allowing the coolant to flow therethrough from the inlet side space **65c** to the outlet side space **65d**. The communication hole **65g** formed in the upper part of the partition wall **65e** is a hole for allowing the air to flow therethrough between the inlet side space **65c** and the outlet side space **65d**.

A connection part of the reserve tank **65** is sufficient to be disposed on the downstream side of the coolant flow with respect to at least one of the temperature adjustment target devices **31**, **32**, **34**, **36**, and **37** and the heat exchangers **26**, **33**, and **35**, and on the suction side of at least one of the first pump **23** and the second pump **24**.

Like the above-mentioned first embodiment, the first switching valve **21** and the second switching valve **22** are switched to perform switching among various operation modes. In the example shown in FIG. 7, like the example shown in FIG. 1, the first, third, and fifth flow paths **11**, **13**, and **15** communicate with each other to thereby form the first coolant circulation circuit indicated by thick solid lines of FIG. 7, whereas the second, fourth, and sixth flow paths **12**, **14**, and **16** communicate with each other to thereby form the second coolant circulation circuit indicated by thick alternate long and short dash lines of FIG. 7.

Further, in the example shown in FIG. 7, like the example shown in FIG. 1, the valve body **22a** corresponding to the fourth inlet **22f** is slightly open on the first flow path **211** side such that the first coolant circulation circuit communicates with the second coolant circulation circuit in the second switching valve **22** positioned on the downstream side. As a result, a communication flow path R for communication between the first coolant circulation circuit and the second coolant circulation circuit is formed within the second switching valve **22**.

At this time, the opening degree of the valve body **22a** corresponding to the fourth inlet **22f** is adjusted such that the

22

flow rate of coolant in the communication flow path R is more than each of the leakage amount from the first switching valve **21** and the leakage amount from the second switching valve **22**.

In the fifth embodiment, the reserve tank **65** whose internal pressure is maintained within the predetermined range is connected to the first flow path **11**. When the volume of the coolant expands or contracts together with the changes in temperature of the coolant in the first coolant circulation circuit, thereby changing the pressure of the first coolant circulation circuit, the first coolant circulation circuit can exchange the coolant with the reserve tank **65**. Thus, the pressure of the first coolant circulation circuit can be maintained within an appropriate range.

The second coolant circulation circuit is connected to the first coolant circulation circuit via the communication flow path R. When the volume of the coolant expands or contracts together with the changes in temperature of the coolant in the second coolant circulation circuit, thereby changing the pressure of the second coolant circulation circuit, the second coolant circulation circuit can exchange the coolant with the reserve tank **65**. Thus, the pressure of the second coolant circulation circuit can be maintained within an appropriate range.

The reserve tank **65** is connected to the first flow path **11** but not connected to the second flow path **12**, and thereby it prevents the coolant from being transferred between the first and second coolant circulation circuits via the reserve tank **65**. As a result, when there is a difference in output between the first pump **23** and the second pump **24**, the waste of the pump power due to the formation of the local loop circuit can be prevented.

Like the above-mentioned first embodiment, because the communication flow path R for communication between the first and second coolant circulation circuits is formed in the second switching valve **22**, it can prevent a part of the second coolant circulation circuit from having a negative pressure in the operation state where the range of lift of the first pump **23** is lower than that of the second pump **24**. (Sixth Embodiment)

Although in the above-mentioned fifth embodiment, only one sealed reserve tank **65** is disposed, in a sixth embodiment of the invention, as shown in FIG. 9, two sealed reserve tanks **65** are disposed (for convenience, hereinafter referred to as a "first reserve tank **65**" and a "second reserve tank **65**").

The first reserve tank **65** is disposed on the suction side of the first pump **23** in the first flow path **11**. The second reserve tank **65** is disposed on the suction side of the second pump **24** in the second flow path **12**. In other words, the first reserve tank **65** is directly connected to the first flow path **11** and the second reserve tank **65** is directly connected to the second flow path **12**.

Each of the first and second reserve tank **65** is provided with the negative pressure valve **653** and the pressurizing valve **654** which are the same as those in the above-mentioned fifth embodiment shown in FIG. 8. The negative pressure valve **653** and pressurizing valve **654** provided in the first reserve tank **65** are opened when the internal pressure of the first reserve tank **65** exceeds a first predetermined range defined for the first reserve tank **65**. The negative pressure valve **653** and pressurizing valve **654** provided in the second reserve tank **65** are opened when the internal pressure of the second reserve tank **65** exceeds a second predetermined range defined for the second reserve tank **65**.

23

Like the above-mentioned first embodiment, the first switching valve **21** and the second switching valve **22** are switched to perform switching among various operation modes. In the example shown in FIG. **9**, like the example shown in FIG. **1**, the first, third, and fifth flow paths **11**, **13**, and **15** communicate with each other to thereby form the first coolant circulation circuit indicated by thick solid lines of FIG. **9**, whereas the second, fourth, and sixth flow paths **12**, **14**, and **16** communicate with each other to thereby form the second coolant circulation circuit indicated by thick alternate long and short dash lines of FIG. **9**.

Further, in the example shown in FIG. **9**, like the example shown in FIG. **1**, the valve body **224** corresponding to the fourth inlet **22f** is open in a small amount on the first flow path **211** side such that the first coolant circulation circuit communicates with the second coolant circulation circuit in the second switching valve **22** on the downstream side. As a result, the communication flow path R for communication between the first coolant circulation circuit and the second coolant circulation circuit is formed as indicated by thick alternate long and two short dashes lines of FIG. **9**.

At this time, the flow rate of the coolant in the communication flow path R is adjusted so as to be more than each of the leakage amount from the first switching valve **21** and the leakage amount from the second switching valve **22** by adjusting the opening degree of the valve body **224** corresponding to the fourth inlet **22f**.

Note that in the example shown in FIG. **9**, the valve body **214** corresponding to the fourth outlet **21f** of the first switching valve **21** may set both the first flow path **211** side and the second flow path **212** side with arbitrary intermediate openings degree to thereby mix and flow the coolant in the first coolant circulation circuit and the coolant in the second coolant circulation circuit in the sixth flow path **16**.

The first reserve tank **65** whose internal pressure is maintained within a first predetermined range is connected to the first flow path **11** (first circuit formation flow path). When the volume of the coolant expands or contracts together with the changes in temperature of the coolant in the first coolant circulation circuit, thereby changing the pressure of the first coolant circulation circuit, the first coolant circulation circuit can exchange the coolant with the first reserve tank **65**. Thus, the pressure of the first coolant circulation circuit can be maintained within an appropriate range.

Likewise, the second reserve tank **65** whose internal pressure is maintained within a second predetermined range is connected to the second flow path **12** (second circuit formation flow path). When the volume of the coolant expands or contracts together with the changes in temperature of the coolant in the first coolant circulation circuit, thereby changing the pressure of the second coolant circulation circuit, the first coolant circulation circuit can exchange the coolant with the second reserve tank **65**. Thus, the pressure of the second coolant circulation circuit can be maintained within an appropriate range.

Because the first and second reserve tanks **65** are connected to one of the first flow path **11** and the second flow path **12**, it prevents the coolant from being transferred between the first and second coolant circulation circuits via the reserve tank **65**. As a result, when there is a difference in output between the first pump **23** and the second pump **24**, the waste of the pump power due to the formation of the

24

local loop circuit and the loss of heat due to the mixing of the coolants having different temperature zones can be prevented.

The first reserve tank **65** is connected to the downstream side of the coolant flow with respect to the radiator **26**, and to the suction side of the first pump **23** in the first coolant circulation circuit, so that the pressure on the suction side of the first pump **23** becomes substantially the atmospheric pressure. This embodiment can prevent an increase in pressure loss due to the occurrence of cavitation and the breakdown of a coolant hose that might be caused when the pressure on the suction side of the first pump **23** becomes a negative pressure.

The second reserve tank **65** is connected to the downstream side of the coolant flow with respect to the cooler core **34** and the battery **37**, and to the suction side of the second pump **24** in the second coolant circulation circuit, so that the pressure on the suction side of the second pump **24** becomes substantially the atmospheric pressure. This arrangement can prevent an increase in pressure loss due to the occurrence of cavitation and the breakdown of a coolant hose that might be caused as the pressure on the suction side of the first pump **24** becomes a negative pressure.

The communication flow path R for communication between the first and second coolant circulation circuits is formed in the second switching valve **22** on the downstream side. Thus, in the operation state where a discharge pressure of the pump in one of the first and second coolant circulation circuits exceeds a preset pressure of the pressurizing valve **654** of the reserve tank **65** disposed in the other circuit, the pressurizing valve **654** can be prevented from being opened. The reason for this will be described below.

For better understanding, in the description below, the operating state is assumed in which the first pump **23** is stopped and the second pump **24** is operating with a predetermined range of lift.

When the first pump **23** is stopped and the second pump **24** operates in a predetermined range of lift, there occurs a difference in pressure between the first and second coolant circulation circuits, thereby causing the valve leakage from the first and second switching valve **21** and **22**. The coolant is often transferred between the first and second coolant circulation circuits in such a direction that equalizes the pressure therebetween.

Regarding the difference in pressure between the first and second coolant circulation circuits, normally, the pressure difference at the first switching valve **21** positioned on the upstream side (pump discharge side) is larger than that of the second switching valve **22** positioned on the downstream side (pump suction side). Thus, the amount of leakage in the first switching valve **21** is more than that in the second switching valve **22**.

Suppose that when the communication flow path R is not formed, the pressures of the first and second coolant circulation circuits are equalized in the first switching valve **21** from which an amount of leakage is the most.

The second coolant circulation circuit is connected to the second reserve tank **65** including the negative pressure valve **653**. When the second pump **24** operates in the predetermined range of lift, the pressure of the second coolant circulation circuit becomes substantially the atmospheric pressure on the suction side of the second pump **24**, and becomes a level corresponding to addition of the atmospheric pressure and the lifting height of the second pump **24** on the discharge side of the second pump **24**. Thus, the first coolant circulation circuit in which the first pump **23** is stopped substantially has the pressure corresponding to the

25

addition of the atmospheric pressure and the lifting height of the second pump 24 in any position thereof.

Thus, when the lifting height of the second pump 24 exceeds the preset pressure of the pressurizing valve 654 of the first reserve tank 65, the pressurizing valve 654 might be opened even though the first pump 23 is stopped, and the coolant in the first coolant circulation circuit flows to the first reserve tank 65 to cause an increase in water level within the first reserve tank 65.

When the coolant in the first coolant circulation circuit flows to the first reserve tank 65, the coolant in the second coolant circulation circuit flows to the first coolant circulation circuit, so that its amount is reduced in the second coolant circulation circuit, thereby reducing the water level within the second reserve tank 65. If such a state continues, a phenomenon occurs in which the second reserve tank 65 becomes empty to suck the air. As a result, the second pump 24 might rotate without the coolant, causing a shaft or bearing of the second pump 24 to be melted and broken due to friction heat.

From this point, in the sixth embodiment of the invention, the communication flow path R for communication between the first coolant circulation circuit and the second coolant circulation circuit is formed in the second switching valve 22 positioned on the downstream side, so that the amount of transfer of the coolant between the first and second coolant circulation circuits becomes the most in the communication flow path R.

Thus, the pressures in the first and second coolant circulation circuits are equalized in the communication flow path R in which the amount of transfer of the coolant becomes most. As mentioned above, the pressure of the second coolant circulation circuit becomes substantially atmospheric pressure on the suction side of the second pump 24, and thus the pressure at the second switching valve 22 also becomes substantially atmospheric pressure. As a result, the pressure in the first coolant circulation circuit becomes substantially atmospheric pressure, and thereby it can avoid the pressurizing valve 654 of the first reserve tank 65 from being opened.

The first and second reserve tanks 65 are independently connected to the first and second coolant circulation circuits, respectively, thereby having the following advantages (1) to (3), as compared to the case where the reserve tank 65 common to the first and second coolant circulation circuits is connected.

(1) This embodiment can respond well to abrupt changes in pressure. (2) Bubbles mixed in the coolant can be appropriately separated into gas and liquid components. (3) The coolant can be adequately charged upon replacing of the coolant.

Further, the first and second reserve tanks 65 connected to the first and second coolant circulation circuits, respectively, are of a sealed type. When there is a difference in lifting height between the first pump 23 and the second pump 24, the reserve tank 65 in the coolant circulation circuit on the low lift range side can be prevented from overflowing. The reason for this will be described below.

For better understanding, in the description below, an operating state is assumed in which the lifting height of the second pump 24 is higher than that of the first pump 23.

Suppose that the two reserve tanks are of the air-release type, the pressure in a connection portion of the second reserve tank in the second coolant circulation circuit (that is, the pressure on the suction side of the second pump 24) becomes substantially the atmospheric pressure. Therefore, a pressure PR2 in the connection portion of the second

26

coolant circulation circuit with the communication flow path R is represented by the following formula:

$$PR2 = \text{Atmospheric Pressure} + \alpha - \text{Pressure Loss of Second Coolant Circulation Circuit}$$

in which α is a differential pressure generated by the second pump 24.

In the steady state, no coolant flows through between the first and second coolant circulation circuits, whereby the pressure PR1 in the connection portion of the first coolant circulation circuit with the communication flow path R is the same as the pressure PR2 in the connection portion of the second coolant circulation circuit with the communication flow path R.

In such a case, the pressure P1 (in other words, pressure on the suction side of the first pump 23) in the connection portion of the first coolant circulation circuit with the first reserve tank is decreased by a combination of a differential pressure generated by the first pump 23 and a pressure loss in the first coolant circulation circuit, as compared to the pressure PR1 in the connection portion of the first coolant circulation circuit with the communication flow path R. Here, when the differential pressure generated by the first pump 23 is 0.1α , a pressure P1 in the connection portion of the first coolant circulation circuit with the first reserve tank 65 is represented by the following formula:

$$P1 = \text{Atmospheric Pressure} + 0.9\alpha - (\text{Combination of Pressure Loss in First Coolant Circulation Circuit and Pressure Loss in Second Coolant Circulation Circuit})$$

Since the pressure loss in the coolant circulation circuit cannot exceed the differential pressure generated by the pump, when the communication flow path R is away from a suction part of the pump, the pressure P1 in the connection portion of the first coolant circulation circuit with the first reserve tank 65 is found to be higher than the atmospheric pressure.

Thus, when the first and second reserve tanks 65 are of an air-release type, the coolant constantly flows into the first reserve tank 65. In this case, the water level of the coolant increases by a potential head which is the same amount as that of a pressure head (gauge pressure) in the connection portion of the first coolant circulation circuit with the first reserve tank, thereby causing the first reserve tank 65 to overflow due to the relationship between the capacity of the first reserve tank 65 and a difference from a lifting height of the first pump 23.

When the coolant flows into the first reserve tank 65, the coolant is supplied from the second reserve tank 65 by the amount thereof into the first reserve tank, and thereby it can make the second reserve tank 65 empty.

From this point, in the sixth embodiment of the invention, the first and second reserve tanks 65 are of a sealed type. When the coolant flows into the first reserve tank 65, the internal pressure of the first reserve tank 65 is increased. As a result, the increase in water level inside the first reserve tank 65 can be suppressed.

As shown in FIG. 10, two sealed-type reserve tanks 65 can be integrated together to improve the mountability of the reserve tank 65 on the vehicle.

(Seventh Embodiment)

As shown in FIG. 11, a seventh embodiment of the invention differs from the first embodiment in the arrangement of the devices.

In the first flow path 11, the first pump 23, the condenser 35, and the heater core 36 are arranged in series with each

27

other. In the second flow path 12, the second pump 24, the chiller 33, and the cooler core 34 are arranged in series with each other.

In the third flow path 13, the inverter 31 and a temperature adjustment target device 70 are disposed in parallel with each other. In the fourth path 14, the radiator 26 is disposed. A part of the fourth flow path 14 on the side of the second switching valve 22 with respect to the radiator 26 is connected to one end side of the bypass flow path 28 via the three-way valve 29. Another part of the fourth flow path 14 on the side of the first switching valve 21 with respect to the radiator 26 is connected to the other end side of the bypass flow path 28. The three-way valve 29 switches between the flow of the heat medium in the fourth flow path 14 to the radiator 26, and the flow of the heat medium to the bypass flow path 28. In the fifth flow path 15, the battery 37 is disposed.

In an example shown in FIG. 11, the fourth outlet 21f of the first switching valve 21, and the fourth inlet 22f and the sixth flow path 16 of the second switching valve 22 are not provided.

Also, in a seventh embodiment of the invention, like the first embodiment, the controller 50 controls the operations of the electric actuator 51 for the first switching valve 21 and the electric actuator 52 for the second switching valve 22 to switch among various kinds of operation modes.

Specifically, the first flow path 11 and at least one of the third to fifth flow paths 13 to 15 form the first coolant circulation circuit (first heat medium circuit). The second flow path 12 and the remaining flow path among the third to fifth flow paths 13 to 15 form the second coolant circulation circuit (second heat medium circuit).

In the example shown in FIG. 11, the first and third flow paths 11 and 13 communicate with each other to thereby form the first coolant circulation circuit indicated by thick solid lines of FIG. 11, whereas the second, fourth, and fifth flow paths 12, 14, and 15 communicate with each other to thereby form the second coolant circulation circuit indicated by thick alternate long and short dash lines of FIG. 11.

Further, in the example shown in FIG. 11, the valve body 224 corresponding to the outlet 22e is open in a small amount on the side of the first flow path 211 such that the first coolant circulation circuit communicates with the second coolant circulation circuit in the second switching valve 22 positioned on the downstream side. As a result, a communication flow path R for communication between the first and second coolant circulation circuits is formed within the second switching valve 22. This embodiment can also obtain the same operations and effects as those of the first embodiment described above.

(Eighth Embodiment)

In an eighth embodiment of the invention, as shown in FIG. 12, the connection structure of a reserve tank 46 is configured in the same way as that of the third embodiment with respect to the structure of the above seventh embodiment. That is, the air-release type reserve tank 46 is connected not only to the first flow path 11, but also to the second flow path 12. Negative pressure valves 60 are respectively disposed in the two parts 47a and 47b into which the main connection flow path 47 is branched. Pressurizing valves 61 are disposed in the two parts 48a and 48b into which the sub-connection flow path 48 is branched.

Like the first embodiment, the controller 50 controls the operations of the electric actuator 51 for the first switching valve 21 and the electric actuator 52 for the second switching valve 22 to switch among various kinds of operation modes.

28

Specifically, the first flow path 11 (first pump arrangement flow path) and at least one of the third to fifth flow paths 13 to 15 form the first coolant circulation circuit (first heat medium circuit). The second flow path 12 (second pump arrangement flow path) and the remaining flow path among the third to fifth flow paths 13 to 15 form the second coolant circulation circuit (second heat medium circuit).

In the example shown in FIG. 12, the first and third flow paths 11 and 13 communicate with each other to thereby form the first coolant circulation circuit indicated by thick solid lines of FIG. 12, whereas the second, fourth, and fifth flow paths 12, 14, and 15 communicate with each other to thereby form the second coolant circulation circuit indicated by thick alternate long and short dash lines of FIG. 12.

Further, in the example shown in FIG. 12, the valve body 224 corresponding to the outlet 22e is open in a small amount on the first flow path 211 side such that the first coolant circulation circuit communicates with the second coolant circulation circuit in the second switching valve 22 positioned on the downstream side. As a result, a communication flow path R for communication between the first coolant circulation circuit and the second coolant circulation circuit is formed within the second switching valve 22. This embodiment can also obtain the same operation and effects as those of the third embodiment described above.

(Ninth Embodiment)

Although in the above-mentioned first embodiment, the communication flow path R is formed inside the second switching valve 22, in a ninth embodiment of the invention, as shown in FIG. 13, a communication flow path 75 is formed outside the second switching valve 22.

One end of the communication flow path 75 is connected to a part between the first outlet 22a of the second switching valve 22 and the suction port of the first pump 23 in the first flow path 11. The other end of the communication flow path 75 is connected to a part between the second outlet 22b of the second switching valve 22 and the suction port of the second pump 24 in the second flow path 12.

A flow path throttle 76 is disposed in the communication flow path 75. Specifically, the dimensions and the like of the communication flow path 75 and the flow path throttle 76 are set such that the flow rate of the coolant in the communication flow path 75 is more than each of the leakage amount from the first switching valve 21 and the leakage amount from the second switching valve 22. Instead of the flow path throttle 76, the entire communication flow path 75 may be configured for a pipe with a fine diameter.

Like the above-mentioned first embodiment, the first switching valve 21 and the second switching valve 22 are switched to perform switching among various operation modes. In the example shown in FIG. 13, like the example shown in FIG. 1, the first, third, and fifth flow paths 11, 13, and 15 communicate with each other to thereby form the first coolant circulation circuit indicated by thick solid lines of FIG. 13, whereas the second, fourth, and sixth flow paths 12, 14, and 16 communicate with each other to thereby form the second coolant circulation circuit indicated by thick alternate long and short dash lines of FIG. 13.

In the ninth embodiment, because the communication flow path 75 can establish communication between the first coolant circulation circuit and the second coolant circulation circuit on its downstream side (pump suction side), it can obtain the same operations and effects as those of the first embodiment.

(Tenth Embodiment)

Although in the above-mentioned first to ninth embodiments, the first switching valve 21 and the second switching

29

valve **22** each are configured of a multi-way valve, in a tenth embodiment, a first switching valve **81** and a second switching valve **82** each are configured of a four-way valve.

FIG. **14** shows a system configuration in the tenth embodiment. FIG. **14** omits the illustration of the reserve tank. However, the connection structure of the reserve tank **46** is the same as that of the reserve tank in each of the first to ninth embodiments.

In the first flow path **11** (first pump arrangement flow path), the first pump **23** and the condenser **35** are disposed in series with each other. In the second flow path **12** (second pump arrangement flow path), the first pump **24** and the chiller **33** are disposed in series with each other.

In the third path **13**, the battery **37** is disposed. In the fourth flow path **14**, the inverter **31** and the radiator **26** are disposed in parallel with each other. In the tenth embodiment of the invention, the fifth and sixth flow paths **15** and **16** are not provided.

The first switching valve **81** has a first inlet **81a** and a second inlet **81b** into which the coolant flows, and a first outlet **81c** and a second outlet **81d** from which the coolant flows. The first switching valve **81** is a first switch for switching the communication state among the first and second inlets **81a** and **81b** and the first and second outlets **81c** and **81d**.

The first inlet **21a** is connected to one end side of the first flow path **11**. The second inlet **21b** is connected to one end side of the second flow path **12**. The first outlet **21c** is connected to one end side of the third flow path **13**. The second outlet **21d** is connected to one end side of the fourth flow path **14**.

The second switching valve **82** has a first inlet **82a** and a second outlet **82b** from which the coolant flows, and a first inlet **82c** and a second outlet **82d** into which the coolant flows. The second switching valve **82** is a second switch for switching the communication state among the first and second outlets **82a** and **82b** and the first and second inlets **82c** and **82d**.

The first outlet **82a** is connected to the other end side of the first flow path **11**. The second outlet **82b** is connected to the other end side of the second flow path **12**. The first inlet **82c** is connected to the other end side of the third flow path **13**. The second inlet **82d** is connected to the other end side of the fourth flow path **14**.

Both the first pump **23** and the second pump **24** are arranged to suck the coolant from a side of the second switching valve **82** and to discharge the coolant toward a side of the first switching valve **81**.

FIG. **15** shows the specific structure of the second switching valve **82**. The second switching valve **82** includes a valve body **821** that rotates. The valve body **821** is provided with a first valve body flow path **822**, and a second valve body flow path **823**. The valve body **821** is rotated to a first rotation position shown in FIG. **15**, and a second rotation position (not shown). In the first rotation position, the first valve body flow path **822** communicates with the first outlet **82a** and the first inlet **82c**, and the second valve body flow path **823** communicates with the second outlet **82b** and the second inlet **82d**. In the second rotation position, the first valve body flow path **822** communicates with the first outlet **82a** and the second inlet **82d**, and the second valve body flow path **823** communicates with the second outlet **82b** and the first inlet **82c**. The valve body **821** is driven by an electric actuator (not shown).

30

Further, the valve body **821** is provided with a communication flow path **824** for communication between the first valve body flow path **822**, and the second valve body flow path **823**.

The first switching valve **81** has the same basic structure as that of the second switching valve **82**, but does not have the structure corresponding to the communication flow path **824** of the second switching valve **82**, which differs from the second switching valve **82**.

Now, the operation of the above-mentioned structure will be described. The controller **50** controls the operations of the electric actuator for the first switching valve **81** and the electric actuator for the second switching valve **82** to thereby switch among various kinds of operation modes.

Specifically, the first flow path **11** and at least one of the third and fourth flow paths **13** and **14** form the first coolant circulation circuit (first heat medium circuit). The second flow path **12** and the remaining other one of the third and fourth flow paths **13** and **14** form the second coolant circulation circuit (second heat medium circuit).

The first and second coolant circulation circuits communicate with each other by the communication flow path **824** formed in the second switching valve **82**. That is, the first and second coolant circulation circuits communicate with each other on the downstream side (pump suction side). Thus, this embodiment can also obtain the same operation and effects as those of the first embodiment described above. (Eleventh Embodiment)

Although in the respective embodiments, each of the device arrangement flow paths with the temperature adjustment devices **31** to **37** disposed therein is connected to both the first switching valve **21** and the second switching valve **22**, in an eleventh embodiment as shown in FIGS. **16** and **17**, the fifth flow path **15** is not connected to the second switching valve **22**, but to the communication flow path **75**.

The communication flow path **75** configures a branch passage for branching the fifth flow path **15** into the first flow path **11** side and the second flow path **12** side. The reserve tank **46** is connected to the fifth flow path **15** via the tank connection flow path **47**.

When the designed pressure of a device positioned in the fifth flow path **15** is higher by a predetermined amount than the designed pressure of the reserve tank **46** (which is equal to a pressure adjustment preset value), the tank connection flow path **47** is connected to the downstream side of the coolant flow of the device. When the designed pressure of the device positioned in the fifth flow path **15** is lower by a predetermined amount than the designed pressure of the reserve tank **46**, the tank connection flow path **47** is connected to the upstream side of the coolant flow of the device. As a result, the pressure range of the device can be maintained to an appropriate one.

The fifth flow path **15** is a switching target flow path that can be switched to between the first flow path **11** side (first coolant circulation circuit side) and the second flow path **12** side (second coolant circulation circuit side).

FIGS. **16** and **17** illustrate parts of the device arrangement flow paths **13**, **14**, and **15** as the device arrangement flow path, and omit illustration of other device arrangement flow paths. In the device arrangement flow paths **13**, **14**, and **15**, various temperature adjustment target devices **91**, **92**, and **93** are disposed. The temperature adjustment target devices **91**, **92**, and **93** each are a coolant circulation device (heat medium circulation device) for allowing the coolant to circulate therethrough.

In the examples shown in FIGS. **16** and **17**, the chiller **33** is disposed in the first flow path **11**, and the condenser **35** is

31

disposed in the second flow path 12. Alternatively, any device other than the chiller 33 and condenser 35 may be disposed in the first flow path 11 and the second flow path 12. The first flow path 11 and second flow path 12 are not necessarily provided with any device.

As shown in FIG. 16, when the first switching valve 21 connects the fifth flow path 15 to the second flow path 12 side, the coolant having flowed through the fifth flow path 15 flows into the second flow path 12, but does not flow into the first flow path 11. That is, although a circuit for circulation of the coolant is formed between the fifth flow path 15 and the second flow path 12, no circuit for circulation of the coolant is formed between the fifth flow path 15 and the first flow path 11, and thereby it cannot cause the inflow of the coolant in a steady state from the fifth flow path 15 to the first flow path 11.

As shown in FIG. 17, when the first switching valve 21 connects the fifth flow path 15 to the first flow path 11 side, the coolant having flowed through the fifth flow path 15 flows into the first flow path 11, but does not flow into the second flow path 12. That is, although a circuit for circulation of the coolant is formed between the fifth flow path 15 and the first flow path 11, no circuit for circulation of the coolant is formed between the fifth flow path 15 and the second flow path 12, and thereby it cannot cause the inflow of the coolant in a steady state from the fifth flow path 15 to the second flow path 12.

In the eleventh embodiment of the invention, the fifth flow path 15 is connected to the communication flow path 75 and the first switching valve 21. Thus, because the fifth flow path 15 may not be connected to the second switching valve 22, it can decrease the number of (number of ports) of the coolant outlets in the second switching valve 22, thereby simplifying the structure of the second switching valve 22.

In a second modified example shown in FIG. 18, the pump 25 (pump for a switching target flow path) is disposed in the fifth flow path 15 (switching target flow path), so that the flow rate of the fifth flow path 15 can be adjusted by control of a driving force of the pump 25. By adjusting the flow rate of the fifth flow path 15, the temperature adjustment of the temperature adjustment target device disposed in the fifth flow path 15, and the amount of heat dissipated and absorbed from and into the temperature adjustment target device 93 can be precisely controlled.

Even when the second switching valve 22 is broken, the circulation of the coolant through the fifth flow path 15 can be continued. Specifically, since the temperature adjustment target device 93 is disposed in the fifth flow path 15, in the event of failure of the second switching valve 22, the circulation of the coolant can be continued for the temperature adjustment target device 93 to continuously maintain the temperature adjustment of the temperature adjustment target device 93.

One end of the communication flow path 75 may be connected to a part of the flow paths forming the first coolant circulation circuit between the valve body 224 of the second switching valve 22 (see FIG. 13), and a coolant suction portion (heat medium suction portion) of the first pump 23. The other end of the communication flow path 75 may be connected to a part of the second coolant circulation circuit between the valve body 224 and a coolant suction portion (heat medium suction portion) of the second pump 24.

In a second modified example shown in FIG. 19, the communication flow path 75 may be formed inside the second switching valve 22.

32

(Twelfth Embodiment)

In a twelfth embodiment, as shown in FIG. 20, the reserve tank 46 is connected to the second flow path 12 via an engine cooling circuit 100.

The engine cooling circuit 100 is a coolant circulation circuit for cooling an engine 101. The engine cooling circuit 100 includes a circulation flow path 102 for allowing the circulation of the coolant. In the circulation flow path 102, the engine 101, the third pump 103, and the radiator 104 are disposed.

The third pump 103 is an electric pump for sucking and discharging the coolant. The third pump 103 may be a mechanical pump driven by a power output from the engine 101.

The radiator 104 is a heat exchanger for heat dissipation (air-heat medium heat exchanger) that dissipates heat of the coolant into the outside air by exchanging heat between the coolant and the outside air.

The circulation flow path 102 is connected to a radiator bypass flow path 105. The radiator bypass flow path 105 is a flow path through which the coolant flows while bypassing the radiator 104.

A thermostat 106 is disposed in a connection portion between the radiator bypass flow path 105 and the circulation flow path 102. The thermostat 106 is a coolant-temperature responsive valve constructed of a mechanical mechanism that is designed to open and close a coolant flow path by displacing a valve body using a thermo wax (temperature sensing member) whose volume changes in response to the temperature.

Specifically, when the temperature of coolant exceeds a predetermined temperature (for example, 80° C. or higher), the thermostat 106 closes the radiator bypass flow path 105. When the temperature of coolant is lower than the predetermined temperature (for example, less than 80° C.), the thermostat 106 opens the radiator bypass flow path 105.

The engine cooling circuit 100 is connected to the second flow path 12 via the connection flow path 107. The connection flow path 107 is a connection flow path for connection between the engine cooling circuit 100 and the first and second coolant circulation circuits. In an example shown in FIG. 20, one connection flow path 107 is provided, but two or more (a plurality of) connection flow paths 107 may be provided.

The reserve tank 46 is connected to the circulation flow path 102 via the tank connection flow path 47. Thus, the reserve tank 46 is connected to the second flow path 12 via the engine cooling circuit 100. In other words, the reserve tank 46 is connected to the first coolant circulation circuit and the second coolant circulation circuit via the engine cooling circuit 100.

In the twelfth embodiment of the invention, one reserve tank 46 can be shared among three circuits, namely, the first coolant circulation circuit, the second coolant circulation circuit, and the engine cooling circuit 100, thereby simplifying the structure.

Like the twelfth embodiment, even though the reserve tank 46 is connected to the circulation flow path 102 of the engine cooling circuit 100, the same operations and effects as those of the respective embodiments described above can be exhibited.

(Thirteenth Embodiment)

In a thirteenth embodiment, as shown in FIG. 21, one reserve tank 46 is connected not only to the circulation flow path 102 of the engine cooling circuit 100 but also to the fifth flow path 15.

33

The reserve tank 46 is connected to the engine cooling circuit 100 and the fifth flow path 15 via the same cap structural portion 62 (negative pressure valve 60, pressurizing valve 61) as that of the fourth embodiment shown in FIG. 6, and the tank connection flow paths 47A and 47B.

The cap structural portion 62 serves as a pressure adjuster for adjusting the pressure of coolant. The cap structural portion 62 on a side of the engine cooling circuit 100 is attached to the radiator 104 of the engine cooling circuit 100. The cap structural portion 62 on a side of the fifth flow path 15 is attached to the radiator 26 disposed in the fifth flow path 15.

As shown in FIG. 22, a pipe 111 for a first flow path, a pipe 112 for a second flow path, and a pipe 113 for air are inserted into a container forming the reserve tank 46. The pipe 111 for the first flow path forms the tank connection flow path 47A on the fifth flow path 15 side. The pipe 112 for the second flow path 112 forms the tank connection flow path 47B on the engine cooling circuit 100 side. The pipe 111 for the first flow path and the pipe 112 for the second flow path are inserted into under a liquid surface of the coolant within the reserve tank 46.

The pipe 113 for air is a pipe for causing the space in the reserve tank 46 to communicate with the air. The pipe 113 is inserted into above the liquid surface of the coolant within the reserve tank 46. Thus, the pressure at the liquid surface of the coolant stored in the reserve tank 46 becomes atmospheric pressure. The reserve tank 46 may be configured such that the pressure at the liquid surface of the coolant stored therein becomes a predetermined pressure (pressure different from the atmospheric pressure).

In the thirteenth embodiment, one reserve tank 46 can be shared among three circuits, namely, the first coolant circulation circuit, the second coolant circulation circuit, and the engine cooling circuit 100, thereby simplifying the structure.

According to the thirteenth embodiment, when the internal pressure of the fifth flow path 15 exceeds a predetermined range, the negative pressure valve 60 or pressurizing valve 61 provided in the cap structural portion 62 is closed, so that the pressure of the first and second coolant circulation circuits can be maintained within the predetermined range. Further, when the internal pressure of the circulation flow path 102 of the engine cooling circuit 100 exceeds a predetermined range, the negative pressure valve 60 or pressurizing valve 61 provided in the cap structural portion 62 is closed, so that the pressure of the engine cooling circuit 100 can be maintained within the predetermined range. Moreover, when the internal pressure of the reserve tank 46 exceeds a predetermined range, the negative pressure valve 60 or pressurizing valve 61 provided in the cap structural portion 62 is closed, so that the internal pressure of the reserve tank 46 can be maintained within the predetermined range.

In the thirteenth embodiment, the cap structural portion 62 is attached to the radiators 26 and 104, and thereby it can easily discharge air retained in tank portions of the radiators 26 and 104 while easily using the existing radiator structure. (Other Embodiments)

The above-mentioned other embodiments can be appropriately combined together. Various modifications and changes can be made to the above-mentioned embodiments as follows.

(1) Various devices can be used as the temperature adjustment target device. For example, the temperature adjustment target device may be a heat exchanger incorporated in a seat where a passenger sits and adapted to cool and heat the seat

34

by coolant. The number of temperature adjustment target devices may be any number as long as the number is a plural number (two or more).

(2) In each of the above-mentioned embodiments, the coolant may intermittently circulate through the temperature adjustment target device to thereby control the heat exchanging capacity for the temperature adjustment target device.

(3) In the embodiments described above, the chiller 33 for cooling the coolant by the low-pressure refrigerant of the refrigeration cycle 40 is used as the cooler for cooling the coolant. However, a Peltier element may be used as the cooler.

(4) In each of the above-mentioned embodiments, the coolant is used as the heat medium. Alternatively, various kinds of media, such as oil, may be used as the heat medium.

(5) Nano-fluid may be used as the coolant (heat medium). The nano-fluid is a fluid into which nanoparticles with a particle diameter of the order of nanometer are mixed. Mixing of the nanoparticles into the coolant can have the following effect, in addition to the same effect of decreasing a freezing point as that in use of a coolant using ethylene glycol (so-called antifreeze solution).

The obtained operations and effects include improvement of a thermal conductivity in a specific temperature range, increase in heat capacity of the coolant, prevention of corrosion of a metal pipe or degradation of a rubber pipe, and enhancing a fluidity of the coolant at an ultralow temperature.

Such operations and effects vary depending on the composition, shape, and compounding ratio of a nanoparticle, an additive, and the like.

This arrangement can improve the thermal conductivity, and thus can obtain the same cooling efficiency, even though the above solution containing the nanoparticles is used in a small amount, as compared to the ethylene glycol coolant.

A thermal capacity of the coolant can be increased to increase the amount of the cold heat stored in the coolant itself (cold stored heat due to sensible heat).

An aspect ratio of the nanoparticle is preferably equal to or more than 50. This is because sufficient heat conductivity can be obtained. The term "aspect ratio" as used herein means a shape index indicative of a ratio between the longitudinal and lateral dimensions of the nanoparticle.

Nanoparticles for use can include any one of Au, Ag, Cu, and C. Specifically, as atoms of the nanoparticles, an Au nanoparticle, an Ag nanowire, a CNT (carbon nanotube), a graphene, a graphite core shell type nano particle (grain body having a structure surrounding the above-mentioned atom, such as a carbonnanotube), an Au nanoparticle-containing CNT, etc., can be used.

(6) The refrigeration cycle 40 in each of the above embodiments employs a fluorocarbon refrigerant as the refrigerant. However, the kind of the refrigerant is not limited to such a kind of refrigerant. Specifically, a natural refrigerant, such as carbon dioxide, a hydrocarbon-based refrigerant, and the like may also be used as the refrigerant.

The refrigeration cycle 40 of each of the above embodiments forms a subcritical refrigeration cycle whose high-pressure side refrigerant pressure does not exceed a critical pressure of the refrigerant. Alternatively, the refrigeration cycle may form a supercritical refrigeration cycle whose high-pressure side refrigerant pressure exceeds the critical pressure of the refrigerant.

(7) In each of the above-mentioned embodiments, the vehicle cooling system of the present disclosure is applied to the hybrid car by way of example.

35

Alternatively, the present disclosure may be applied to an electric car which obtains a driving force for traveling from an electric motor for traveling without including an engine, a fuel cell vehicle which uses a fuel cell as a traveling energy generator, or the like.

(8) Although in each of the above-mentioned embodiments, a door-type valve body is used as the valve bodies **214** and **224** of the first switching valve **21** and the second switching valve **22**, a rotary valve or butterfly type valve body may be used as the valve body of the first and second switching valves **21** and **22**.

(9) Although in each of the above-mentioned embodiments, the reserve tanks **46** and **65** are connected to the first and second flow paths **11** and **12** by way of example, the reserve tanks **46** and **65** may be connected to the third to sixth flow paths **13** to **16**.

(10) Although in each of the above-mentioned embodiments, the communication flow paths **R**, **75**, and **824** are formed such that the first and second coolant circulation circuits communicated with each other on the downstream side (pump suction side) by way of example, the communication flow paths **R**, **75**, and **824** may be formed such that the first and second coolant circulation circuits communicate with each other in positions other than the downstream side. Also, in this case, the first and second coolant circulation circuits communicate with each other, thereby adjusting the maximum pressure of the first and second coolant circulation circuits.

(11) In the above first embodiment, the communication flow path **R** is formed by causing the valve body **224** corresponding to the fourth inlet **22f** in the second switching valve **22** to be opened in a small amount on a side of the first flow path **211**. However, the communication flow path **R** may be formed by causing the valve body **224** corresponding to the first to third inlets **22c** to **22e** in a small amount on a side of the first flow path **211**.

What is claimed is:

1. A thermal management system for a vehicle, comprising
 - a first pump and a second pump sucking and discharging a liquid heat medium;
 - a temperature adjustment target device having a temperature adjusted by the heat medium;
 - a heat exchanger exchanging heat with the heat medium;
 - numerous flow paths for circulation of the heat medium, including a first pump arrangement flow path in which the first pump is disposed, a second pump arrangement flow path in which the second pump is disposed, and a device arrangement flow path in which at least one of the temperature adjustment target device and the heat exchanger is disposed;
 - a first switching portion connected to one end side of each of the numerous flow paths, and adapted to selectively establish communication between the numerous flow paths; and
 - a second switching portion connected to the other end side of each of the numerous flow paths, and adapted to selectively establish communication between the numerous flow paths; and
 - a reserve tank storing the heat medium therein, wherein the first switching portion and the second switching portion are operated such that at least one of the numerous flow paths communicates with the first pump arrangement flow path to form a first heat medium circuit, and that at least another one of the numerous

36

flow paths communicates with the second pump arrangement flow path to form a second heat medium circuit, and

the reserve tank is configured to set a pressure of a liquid surface of the heat medium stored to a predetermined pressure, and is connected to only one of the numerous flow paths.

2. A thermal management system for a vehicle, comprising:

- a first pump, a second pump, and a third pump sucking and discharging a liquid heat medium;
- a temperature adjustment target device having a temperature adjusted by the heat medium;
- a heat exchanger exchanging heat with the heat medium;
- numerous flow paths for circulation of the heat medium, including a first pump arrangement flow path in which the first pump is disposed, a second pump arrangement flow path in which the second pump is disposed, and a device arrangement flow path in which at least one of the temperature adjustment target device and the heat exchanger is disposed;
- a first switching portion connected to one end side of each of the numerous flow paths, and adapted to selectively establish communication between the numerous flow paths; and
- a second switching portion connected to the other end side of each of the numerous flow paths, and adapted to selectively establish communication between the numerous flow paths;
- a reserve tank storing the heat medium therein;
- a circulation flow path provided with the third pump, and allowing the heat medium to circulate therethrough; and
- at least one connection flow path connecting at least one of the numerous flow paths to the circulation flow path, wherein

the first switching portion and the second switching portion are operated such that at least one of the numerous flow paths communicates with the first pump arrangement flow path to form a first heat medium circuit, and that at least another one of the numerous flow paths communicates with the second pump arrangement flow path to form a second heat medium circuit, and

the reserve tank is configured to set a pressure of a liquid surface of the heat medium stored to a predetermined pressure, and is connected to the circulation flow path.

3. A thermal management system for a vehicle, comprising:

- a first pump and a second pump sucking and discharging a liquid heat medium;
- a temperature adjustment target device having a temperature adjusted by the heat medium;
- a heat exchanger exchanging heat with the heat medium to change a temperature of the heat medium;
- numerous flow paths for circulation of the heat medium, including a first pump arrangement flow path in which the first pump is disposed, a second pump arrangement flow path in which the second pump is disposed, and a device arrangement flow path in which at least one of the temperature adjustment target device and the heat exchanger is disposed;
- a first switching portion connected to one end side of each of the numerous flow paths, and adapted to selectively establish communication between the numerous flow paths; and

37

a second switching portion connected to the other end side of each of the numerous flow paths, and adapted to selectively establish communication between the numerous flow paths;

one or two reserve tanks connected to a predetermined flow path of the numerous flow paths, and storing therein the heat medium; and

a pressure adjustment valve that opens when an internal pressure of the predetermined flow path or an internal pressure of the reserve tank exceeds a predetermined range, wherein

the first switching portion and the second switching portion are operated such that at least one of the numerous flow paths communicates with the first pump arrangement flow path to form a first heat medium circuit, and that at least another one of the numerous flow paths communicates with the second pump arrangement flow path to form a second heat medium circuit.

4. A thermal management system for a vehicle, comprising:

a first pump, a second pump, and a third pump sucking and discharging a liquid heat medium;

a temperature adjustment target device having a temperature adjusted by the heat medium;

a heat exchanger exchanging heat with the heat medium to change a temperature of the heat medium;

numerous flow paths for circulation of the heat medium, including a first pump arrangement flow path in which the first pump is disposed, a second pump arrangement flow path in which the second pump is disposed, and a device arrangement flow path in which at least one of the temperature adjustment target devices and the heat exchanger is disposed;

a first switching portion connected to one end side of each of the numerous flow paths, and adapted to selectively establish communication between the numerous flow paths;

a second switching portion connected to the other end side of each of the numerous flow paths, and adapted to selectively establish communication between the numerous flow paths;

a circulation flow path provided with the third pump, and allowing the heat medium to circulate therethrough;

at least one connection flow path connecting at least one of the numerous flow paths to the circulation flow path; one or two reserve tanks connected to a predetermined flow path of the numerous flow paths and the circulation flow path, and adapted to store therein the heat medium; and

a pressure adjustment valve that opens when an internal pressure of the predetermined flow path or an internal pressure of the reserve tank exceeds a predetermined range, wherein

the first switching portion and the second switching portion are operated such that at least one of the numerous flow paths communicates with the first pump arrangement flow path to form a first heat medium circuit, and that at least another one of the numerous flow paths communicates with the second pump arrangement flow path to form a second heat medium circuit.

5. The thermal management system for a vehicle according to claim 1, further comprising:

a communication flow path for communication between the first heat medium circuit and the second heat medium circuit.

38

6. The thermal management system for a vehicle according to claim 5, further comprising:

a switching target flow path that allows the heat medium to circulate therethrough, the switching target flow path being connected to the communication flow path and the second switching portion.

7. The thermal management system for a vehicle according to claim 6, wherein

the switching target flow path is provided with a heat medium circulation device through which the heat medium circulates.

8. The thermal management system for a vehicle according to claim 7, wherein

the switching target flow path is provided with a switching target flow-path pump that sucks and discharges the heat medium.

9. The thermal management system for a vehicle according to claim 8, wherein

a pressure adjuster adjusting a pressure of the heat medium is attached to the heat medium circulation device.

10. The thermal management system for a vehicle according to claim 5, wherein

the second switching portion is a switching valve with a valve body for switching a flow of the heat medium; and

the communication flow path is provided inside the second switching portion.

11. The thermal management system for a vehicle according to claim 5, wherein

the second switching portion includes a valve body that switches a flow of the heat medium;

one end of the communication flow path is connected to a portion between the valve body and a heat medium suction portion of the first pump in the flow path forming the first heat medium circuit, and

the other end of the communication flow path is connected to a portion between the valve body and a heat medium suction portion of the second pump in the flow path forming the second heat medium circuit.

12. The thermal management system for a vehicle according to claim 5, wherein

the communication flow path establishes communication between the first heat medium circuit and the second heat medium circuit, at a downstream side of a heat medium flow with respect to at least one of the temperature adjustment target device and the heat exchanger, and at a suction side of each of the first pump and the second pump.

13. The thermal management system for a vehicle according to claim 5, wherein

the communication flow path is formed by causing the second switching portion to establish communication between the first pump arrangement flow path and the second pump arrangement flow path.

14. The thermal management system for a vehicle according to claim 5, wherein

the second switching portion includes a valve body provided with a first valve body flow path in communication with the first pump arrangement flow path, and a second valve body flow path, and

the communication flow path is a flow path formed in the valve body, and establishes communication between the first valve body flow path and the second valve body flow path.

15. The thermal management system for a vehicle according to claim 1, wherein

39

a connection portion of the reserve tank is located at a downstream side of a heat medium flow with respect to at least one of the temperature adjustment target device and the heat exchanger, and at a suction side of at least one of the first pump and the second pump.

16. The thermal management system for a vehicle according to claim 1, wherein

the reserve tank has an inflow-outflow port into which and from which the heat medium flows,

the inflow-outflow port is connected to the first pump arrangement flow path via a main connection flow path that allows the heat medium to circulate therethrough, and

one end of the main connection flow path, opposite to the reserve tank, is connected to a part of the first pump arrangement flow path at a suction side of the first pump.

17. The thermal management system for a vehicle according to claim 1, wherein

the reserve tank has a main inflow-outflow port and a sub-inflow-outflow port, into which and from which the heat medium flows,

the main inflow-outflow port is connected to the first pump arrangement flow path via a main connection flow path that allows the heat medium to circulate therethrough,

the sub-inflow-outflow port is connected to the first pump arrangement flow path via a sub-connection flow path in which a resistance of a flow of the heat medium is larger than that in the main connection flow path,

one end of the main connection flow path, opposite to the reserve tank, is connected to a part of the first pump arrangement flow path at a suction side of the first pump, and

one end of the sub-connection flow path, opposite to the reserve tank, is connected to a part of the first pump arrangement flow path at a discharge side of the first pump.

18. The thermal management system for a vehicle according to claim 3, wherein

the reserve tank has an inflow-outflow port into and from which the heat medium flows,

the inflow-outflow port is connected to the first pump arrangement flow path and the second pump arrangement flow path via a main connection flow path which allows the heat medium to circulate therethrough, and

one end of the main connection flow path, opposite to the reserve tank, is connected to a part of the first pump arrangement flow path at a suction side of the first pump, and connected to a part of the second pump arrangement flow path, at a suction side of the second pump.

19. The thermal management system for a vehicle according to claim 3, wherein

the reserve tank has a main inflow-outflow port and a sub-inflow-outflow port into which and from which the heat medium flows,

40

the main inflow-outflow port is connected to the first pump arrangement flow path and the second pump arrangement flow path via a main connection flow path that allows the heat medium to circulate therethrough, and

the sub-inflow-outflow port is connected to the first pump arrangement flow path and the second pump arrangement flow path via a sub-connection flow path having a resistance of the flow of the heat medium larger than that in the main connection flow path,

one end of the main connection flow path opposite to the reserve tank is connected to a part of the first pump arrangement flow path at a suction side of the first pump, and connected to a part of the second pump arrangement flow path at a suction side of the second pump, and

one end of the sub-connection flow path, opposite to the reserve tank, is connected to a part of the first pump arrangement flow path at a discharge side of the first pump, and connected to a part of the second pump arrangement flow path at a discharge side of the second pump.

20. The thermal management system for a vehicle according to claim 3, wherein

only the one reserve tank is provided,

the predetermined flow path is at least one of a first circuit formation flow path forming the first heat medium circuit, and a second circuit formation flow path forming the second heat medium circuit, and

the one reserve tank is configured to set a pressure of a liquid surface of the stored heat medium to an atmospheric pressure, and is connected to the at least one circuit formation flow path via the pressure adjustment valve.

21. The thermal management system for a vehicle according to claim 3, wherein

the two reserve tanks are provided,

one of the two reserve tanks is connected to a first circuit formation flow path forming the first heat medium circuit,

the other one of the two reserve tanks is connected to a second circuit formation flow path forming the second heat medium circuit,

the pressure adjustment valve is provided in both of the one reserve tank and the other reserve tank,

the pressure adjustment valve provided in the one reserve tank is open when an internal pressure of the one reserve tank exceeds a first predetermined range, and the pressure adjustment valve provided in the other reserve tank is open when an internal pressure of the other reserve tank exceeds a second predetermined range.

22. The thermal management system for a vehicle according to claim 1, wherein the predetermined pressure is an atmospheric pressure.

* * * * *